www.somfy.com

# Situo 1 RTS
# Situo 5 RTS



EN INSTRUCTIONS
KO 사용 설명서

Ref.5128235A

somfy

## EN

The Situo 1 RTS allows the user to control a group of one or more end-products.

The Situo 5 RTS can be used to control up to two or five groups of one or more end-products respectively.

### 1. Safety and liability

#### 1. 1. Liability

Before installing and using this product, please read this guide carefully. This Somfy product must be installed by a home motorisation and automation professional. Furthermore, the installer must comply with standards and legislation in the country in which the product is being installed, and inform his customers of the operating and maintenance conditions for the product. He must give them this guide. Any use outside the sphere of application defined by Somfy is forbidden. Doing so would void the warranty and release Somfy of all liability, as would any failure to comply with the instructions given herein. Never begin installing without first checking the compatibility of this product with the associated equipment and accessories.

#### 1. 2. Safety instructions

- Keep the Situo RTS out of the reach of children.
- Never drop, knock, puncture or immerse the Situo RTS in liquid.
- Do not use abrasive products or solvents to clean them.

### 2. The Situo 1 RTS and Situo 5 RTS in detail (Figure A)

- a Up button
- b STOP / my button
- c Down button
- d Key press indicator light(s)
- e Group selector switch
- f PROG. button
- g Wall mount

### 3. Selecting groups on the Situo 5 RTS (Figure B)

Before using the Situo 5 RTS, ensure that the right group is selected.

Press the group selector switch e repeatedly to select the right group. The indicator light d corresponding to the group switches on individually before all the indicators switch on together for the selection of the last group.

### 4. Adding/Removing a Situo RTS

To store the first control: refer to the instructions for the RTS receiver or drive.

To add or remove the Situo RTS to/from an end-product (Figure C)

1) On the individual control already associated with the end-product:
   - Press the PROG. button (≈ 2 s) until the end-product moves back and forth.
2) On the Situo RTS to be added or removed:

For the Situo 5 RTS, first select the right group.

- Briefly press the PROG. button: the end-product moves back and forth. The Situo RTS has been added or removed.

## KO

Situo 1 RTS를 사용하면 사용자가 1개 이상의 제품으로 구성된 1개의 그룹을 제어할 수 있습니다.

Situo 5 RTS는 1개 이상의 완제품으로 구성된 1~5개의 그룹을 제어할 수 있습니다.

### 1. 안전 및 책임

#### 1. 1. 책임

본 제품을 설치 및 사용하기 전에 본 설명서를 주의해서 읽고 숙지하십시오. 본 Somfy 제품은 반드시 가정용 전동 모터 및 홈 오토메이션 설치 기사가 설치해야 합니다. 또한 설치 기사는 본 제품이 설치되는 국가의 표준과 규정을 준수해야 하고, 고객에게 본 제품의 작동 및 유지보수 조건을 전달해야 합니다. 설치 기사는 고객에게 본 설명서를 전달해야 합니다. Somfy에서 명시한 적용 범위 이외의 모든 사용은 금지됩니다. 이러한 경우 여기에 명시된 지침을 준수하지 않은 것이기 때문에 보증이 무효화되고 Somfy는 모든 책임으로부터 면제됩니다. 관련 장비 및 부속품에 대한 본 제품의 호환성을 확인하기 전에 절대 설치를 시작하지 마십시오.

#### 1. 2. 안전 지침

- Situo RTS를 어린이 손이 닿지 않는 곳에 보관하십시오.
- Situo RTS를 절대 떨어뜨리거나 충격을 가하거나 구멍을 뚫거나 액체에 담그지 마십시오.
- 연마 제품이나 솔벤트를 사용해 제품을 청소하지 마십시오.

### 2. Situo 1 RTS 및 Situo 5 RTS 세부 정보(그림 A)

- a 올림 버튼
- b 정지 / my 버튼
- c 내림 버튼
- d 작동 표시등
- e 그룹 선택 스위치
- f PROG. 버튼
- g 벽걸이

### 3. Situo 5 RTS에서 그룹 선택(그림 B)

Situo 5 RTS를 사용하기 전에 원하는 그룹이 선택되었는지 확인하십시오.

그룹 선택 스위치 e를 반복해서 눌러 원하는 그룹을 선택하십시오. 그룹에 해당하는 표시등 d가 개별적으로 켜진 후 마지막 그룹의 선택을 위해 모든 표시등이 함께 켜집니다.

### 4. Situo RTS 추가/복사/제거

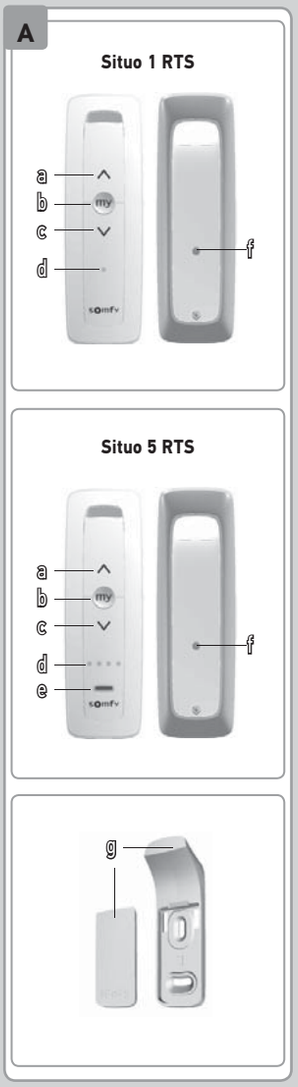
최초 리모컨 설정 방법은 모터라인 수신기, 슬림 모터라인 수신기, 모듈 DC RTS 수신기 또는 알투스 모터, 소니스 모터의 리모컨 설정 방법을 참고하세요.

제품에 Situo RTS 추가, 복사 또는 제거(그림 C)

1) 이미 제품에 연결된 다른 RTS 리모컨을 사용하여,
   - 제품이 앞뒤로 작동할 때까지 PROG. 버튼을 누르십시오(약 2초). 그러면 새로운 Situo 5 RTS 추가 및 제거를 할 준비가 됩니다.
2) 추가, 복사 또는 제거할 Situo RTS

Situo 5 RTS의 경우 먼저 원하는 그룹을 선택하십시오.

- 새로 추가하거나 삭제할 리모컨의 PROG. 버튼을 짧게 누릅니다. 제품이 짧게 왕복 작동합니다. Situo RTS가 추가, 복사 또는 제거가 됩니다.




Somfy SAS
50 avenue du Nouveau Monde
F - 74300 Cluses
www.somfy.com

somfy

EN

## 5. Attaching the wall mount (Figure D)

Referring to the diagram, open the wall mount and fix it to a flat surface using a screwdriver and an M3-type screw.

Do not use an electric screwdriver.

## 6. Use

### 6. 1. ∧ / ∨ buttons (Figure E)

### 6. 2. STOP/my button (Figure F)

- **Briefly** press **my** to stop the end-product from activating.
- If the end-product has been stopped, **briefly** press **my** to activate it until the favourite position (my) **(Figure G)**.

### 6. 3. Setting, modifying or deleting the favourite position (my) (Figure H)

- Place the end-product in the required position and press **my** (≈ 5 s) to set the favourite position (my).
- Place the end-product in the favourite position (my) and press **my** (≈ 5 s) to delete it **(Figure I )**.

## 7. Replacing the last broken or lost control point

To replace the last broken or lost RTS control point, contact a home motorisation or automation professional.

## 8. Replacing the battery (Figure J )

Referring to the diagram, open the Situo 1 RTS or Situo 5 RTS, replace the battery and then close.

Separate storage cells and batteries from other types of waste and recycle them via the local collection facility.

## 9. Technical data

Radio frequency: 447 MHz (Korea)
Radio range: 20 m between two walls
Operating temperature: 0°C to +50°C
Power supply: 1 CR2430 3 V battery.

KO

## 5. 벽걸이 장착(그림 D)

그림에 따라 벽걸이를 열고 드라이버와 M3 타입 나사를 사용해 평평한 표면에 고정하십시오.

전동 드라이버를 사용하지 마십시오.

## 6. 사용

### 6. 1. ∧ / ∨ 버튼(그림 E)

### 6. 2. 정지/my 버튼(그림 F)

- **my**를 **짧게** 눌러 제품 작동을 멈추십시오.
- 제품이 작동을 멈추면 **my**를 **짧게** 눌러 사용자 선호 위치(my)까지 작동하십시오**(그림 G)**.

### 6. 3. 사용자 선호 위치(my) 설정, 변경 또는 삭제 (그림 H)

- 제품을 원하는 위치에 놓고 **my**를 눌러 (약 5초) 사용자 선호 위치(my)를 설정하십시오.
- 제품을 사용자 선호 위치(my)에 놓고 **my**를 눌러(약 5초) 삭제하십시오**(그림 I)**.
- 사용자 선호 위치 변경은 이미 설정된 위치를 삭제 후 새로운 사용자 선호 위치를 설정하십시오.

## 7. 고장 났거나 분실한 리모컨 교체

고장 났거나 분실한 RTS 리모컨을 교체하려면 전동 모터 및 홈 오토메이션 설치 기사에게 문의하시기 바랍니다.

## 8. 배터리 교체(그림 J )

그림에 따라 Situo 1 RTS 또는 Situo 5 RTS를 열고 배터리를 교체한 다음 닫으십시오.

배터리를 다른 종류의 폐기물과 분리한 다음 지역 수거 센터를 통해 재활용하십시오.

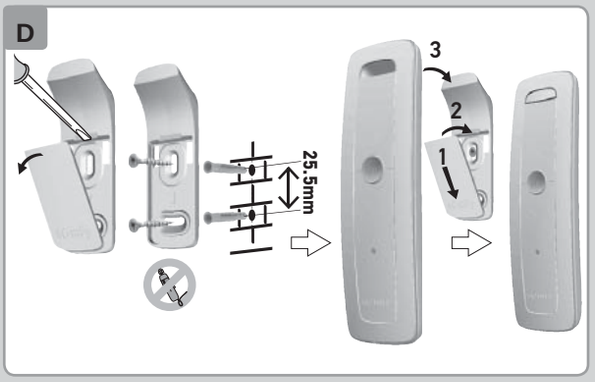
## 9. 기술사양

무선 주파수: 447 MHz (한국)
무선 범위: 두 벽을 통과할 경우 20m
작동 온도: 0°C ~ +50°C
전원 공급 사양: 1 CR2430 3 V 배터리

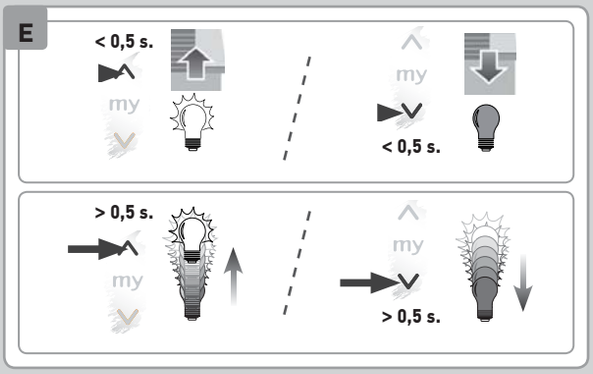
이 기기는 가정용(B급) 전자파적합기기로서 주로 가정에서 사용하는 것을 목적으로 하며, 모든 지역에서 사용 할 수 있습니다.
SFY-Telis1RTSPURE, SFY-Telis4RTSPURE

1. 기기의 명칭(모델명) Situo 1 RTS Pure, Situo 5 RTS Pure
2. 인증 받은 자의 상호 (주)솜피(031-600-5250, www.somfy.co.kr)
3. 제조국: 튀니지


D





E



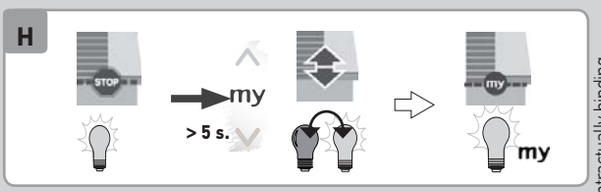

F



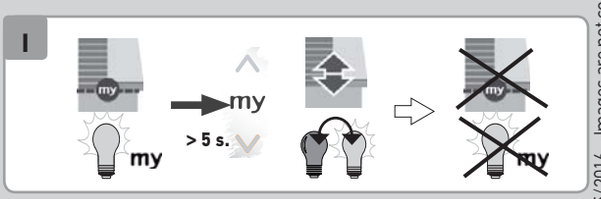

G



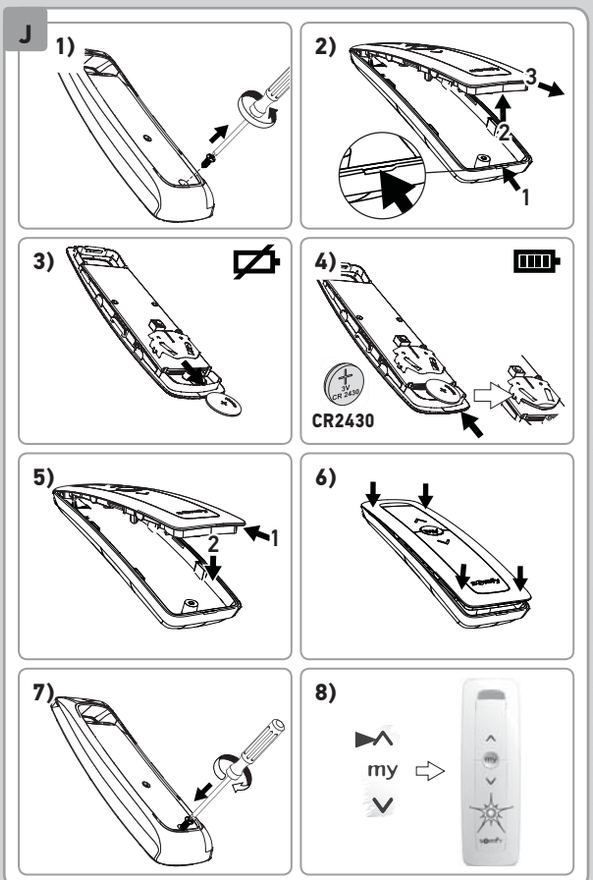

H




I




J




Copyright © 2016 Somfy SAS. All rights reserved. Somfy SAS, capital 20.000.000 Euros, RCS Annecy 303.970.230 - 05/2016 - Images are not contractually binding