

Inside Sensor Box


animeo Solo

animeo IB+

animeo KNX

animeo LON

SOLUTIONS FOR BUILDING CONTROL

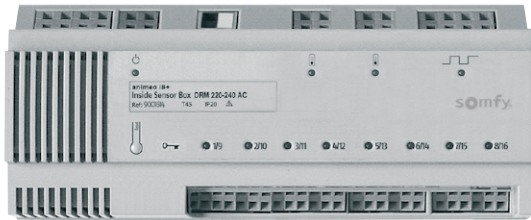

Ref. 9001614

For connection to external push buttons or key switches per zone and up to two Inside Temperature Sensors.

The Inside Sensor Box can be integrated into animeo IB+ and animeo IP solutions.

For DIN-rail installation.

Installation advantages

- > Easy and quick commissioning in combination with the animeo IB+ Building Controller and animeo IP Building Controller.
- > Spring connector with cable ties for safer and quicker installation.
- > Status feedback through LEDs.

Functional advantages

- > Optimised energy savings by taking into account inside temperature values.
- > Inside Temperature Sensors enable easy extendability of energy saving options of the system.
- > With the integration of the Inside Sensor Box the natural ventilation function in combination with window openers can be activated.


Wiring

Connection	Cables	Twisted pairs	Max. distance
Motors	Min.: 4 x 0.75 mm ² /18 AWG Max.: 4 x 2.5 mm ² /14 AWG	-	150 m
Switches	Min.: 3 x 0.6 mm/22 AWG Max.: 3 x 2.5 mm ² /14 AWG	Recommended	100 m
Group control	Min.: 4 x 0.6 mm/22 AWG Max.: 4 x 1.5 mm ² /16 AWG	Recommended	1000 m
100-240 V AC	Min.: 3 x 1.5 mm ² /16 AWG Max.: 3 x 2.5 mm ² /13 AWG	-	

Classification

The Motor Controller is an electronically and manually-operated, independently-mounted control.

- Class A control function
- Type 1 action
- Pollution degree: 2
- Rated impulse voltage: 4 kV
- Temperature of the ball hardness test: 75 ° C
- Type X attachment
- Method of attachment for non-detachable cords: screwless spring terminal
- EMC emission test: $U_{AC} = 230V AC$ $I_{AC} = 0.5 A$ (EN 55022 Class B emission)

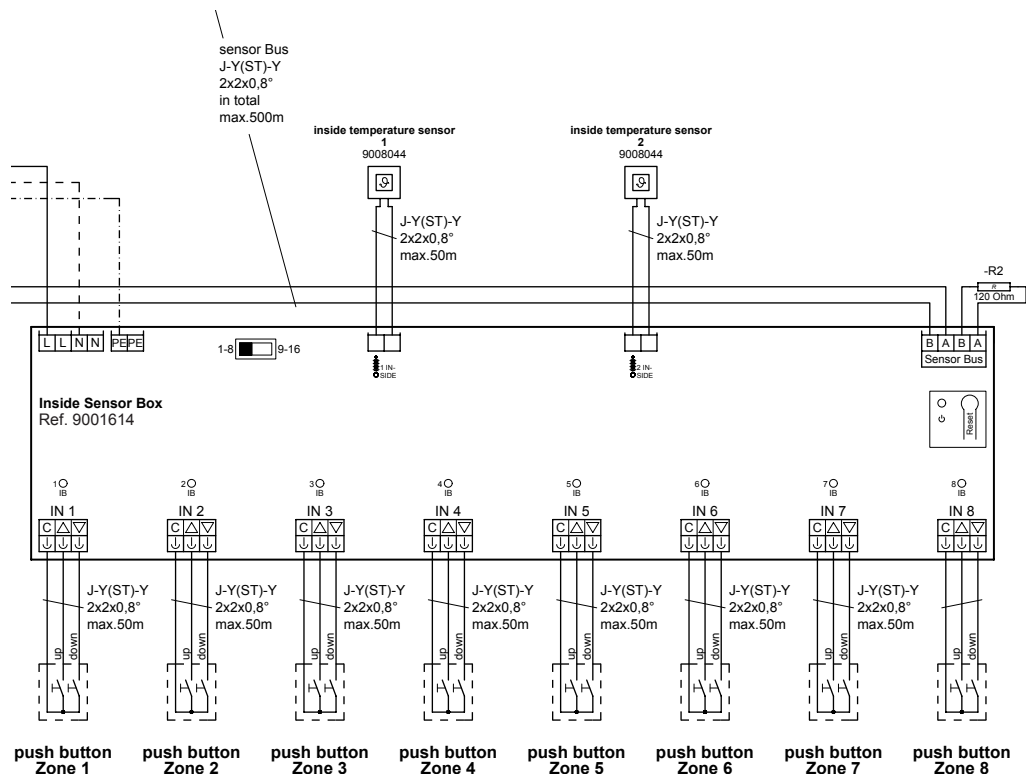

CHARACTERISTICS

WM Ref. 9001614

Supply voltage	220-240 V AC / 50/60 Hz
Stand-by current (IEC 62301)	35 mA@230 V / 50 Hz
Stand-by power (IEC 62301)	3 W@230 V / 50 Hz
Terminals	Spring connectors
Running time per output (relay contact)	Max. 5 minutes
Operating temperature	0 °C to 45 °C
Relative humidity	max. 85 %
Material of housing	CC-ABS polycarbonate
Housing dimensions (w x h x d)	90 x 210 x 63 mm
Weight	520 g
Degree of protection	IP 20
Protection class	II (looped through PE connection - depending on the installation)
Conformity	www.somfy.com/ce