

# J4 1TN

Wired

RS485

Dry contact

RTS

io

SOLUTIONS FOR COMMERCIAL BUILDINGS

The solution for motorization of external Venetian blind dedicated to OEM.



## Applications



external  
venetian blinds

Type 1, type 2, type 3



• Suitable for the following headrails: SCHENKER (78 x 67 mm), HUNTER DOUGLAS (57 x 51 mm), STOREN MATERIAL (58 x 56 mm), GRIESSER (67 x 66 mm).

## Main characteristics

- > The easiest and first offer for external Venetian blind actuator in the Somfy range
- > Safety stop (snow between slats, etc...) via a mushroom
- > No mechanical settings :
  - Bottom end-limit already set in factory
  - Upper end-limit setting with a mushroom (accessory for height adjustment)
- > Easy integration:
  - The shortest motor available on the market
  - Fast connection (plug and play) with Hirschmann plugs
  - No end-limit settings


## Certifications



somfy®

CHARACTERISTICS

Supply voltage	230 V AC / 50 Hz
Degree of protection	IP 54
Operating temperature	20% -20 to 70°C 80% -10 to 40°C
Protection class	Class I
Limit switch unit	Mechanic
Conformity	www.somfy.com/ce

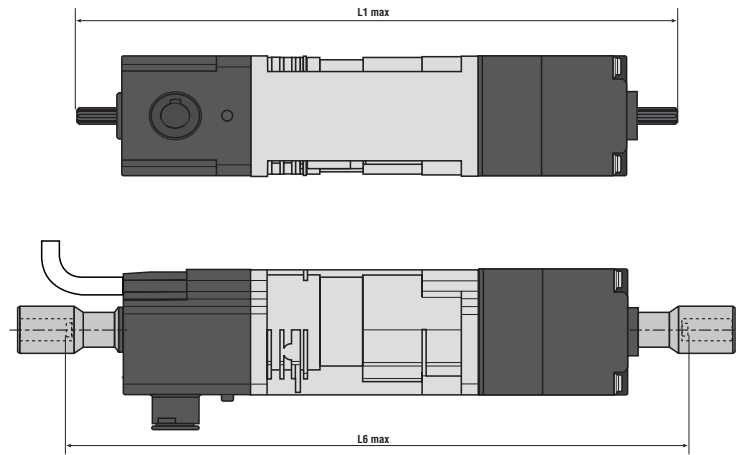


Performance

Nominal voltage	230 V / 50 Hz		
Torque	6 Nm	10 Nm	18 Nm
Speed	24 rpm	24 rpm	24 rpm

Dimensions

L1 (in mm)	254	269	289
L6 (in mm)	265	280	300

Type of cable



1	Neutral	Blue
2	Up	Black
3	Down	Brown
⏚	Earth	Green / Yellow