


Water leakage detector

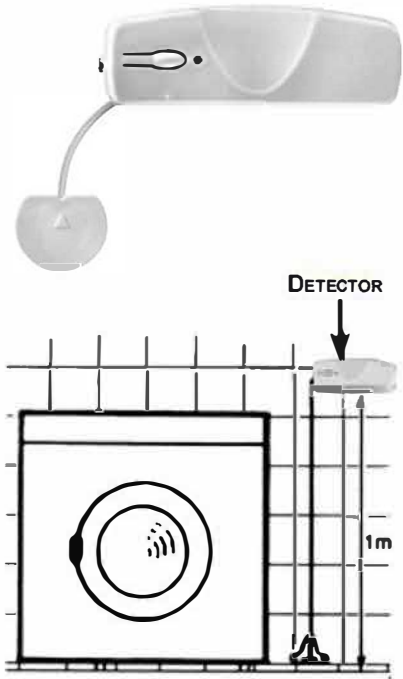

1 Fix the sensor mount to the wall at floor level.

2 Mount the detector casing on the wall approximately 1 m above the floor.

3 Slide the sensor between the lugs on the mount until you hear a click, and pass the wire through the slots.

4 Close the cover.

5 Test the detector:

Pour water between the sensor's 2 electrodes.

The indoor siren sounds quietly for 2 minutes.

To stop the alarm, press **OFF** on the remote control.

At the end of the test, remove the water and dry the electrodes.

