

SOMFY [®]	14/03/00	LT 60 SASO TECHNICAL DATA	DMKI - FPTE RANGE 2 LT60SASORange2R0
---------------------------	----------	----------------------------------	--

Nominal voltage	127 V - 60 Hz
Power supply tolerances	115 - 139 V
Thermal time (to reach 115°C)	2,25 minutes
Number of wires of the cable	4
Wire section	AWG 18
Type of limit switch unit	Quick limit switch
Capacity of the LSU	35 turns
Repeatability	± 5°
System of protection	IP 44
Interface drawings	Wheel interface LT60 206801-Crown interface LT60, LT60ADF, FTS60 & LT60CSI 206802-Interface drawing star head LT60 206803-Interface drawing LT50&60 buttons 206817.
Basic crown for tube Ø	63 x 1,5 mm
Temperature working range	Normal use : -10°C to +40°C Exceptionnal use (20% of the life time not continuous) : -25°C to + 70°C
Noise level	According to SOMFY measures (for information only).Worse value : in load up direction during 10 seconds.

Designation	Nm	rpm	reference	mm	mm	mm	mm	W	A	°C	Brake type	kg	dB(A)
	Nominal torque	Nominal speed		L1 max.	L2 (±3 mm)	L3 max.	tube	Rated power	Rated current	Thermal tripping		Weight	Noise
660R2	60	14	901188	659	642	665	595	285	2,65	140	sliding	4,05	63
680R2	80	14	901189	659	642	665	595	390	3,3	140	sliding	4,3	65
6100R2	100	14	901190	659	642	665	595	430	3,8	140	sliding	407	67





14/03/00

LT 60 SASO TECHNICAL DATA

RANGE 2

WIRING	Neutral	White
	White button	Black
	Yellow button	Red
	Earth	Green

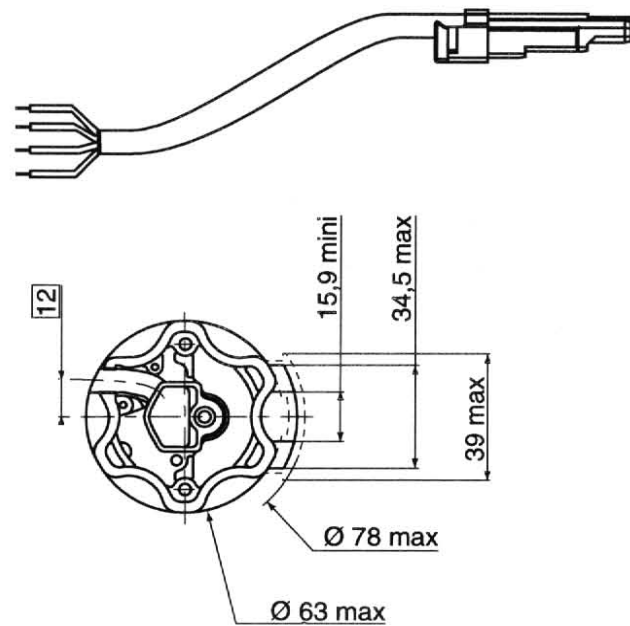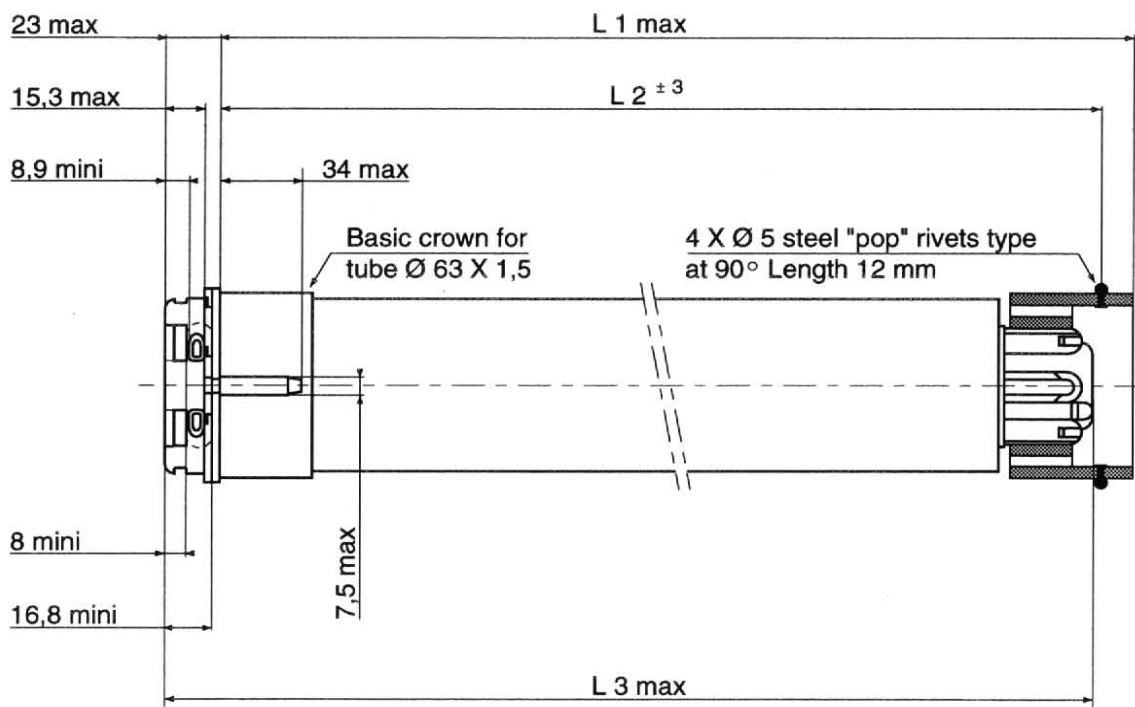

Visa :	DT <i>BS</i>	Quality <i>[Signature]</i>	GMD <i>[Signature]</i>
--------	--------------	----------------------------	------------------------