


SOMFY®
ELECTRONIC PRODUCT FORM
09- 12 - 2003
DMKI-FPTE 1870069 R0

designation	Inis DC roller
reference	1870069
range	GPS

FUNCTIONS

The inis DC roller is a power supply 230 VAC / 24VDC with built in inteo switch for concept 25 SOMFY motors. Dedicated to balloon shades, roman shades, pleated shades, cellular shades, & roller shades.

Easy to fit inside a standard electrical European recessed boxes Ø 60.

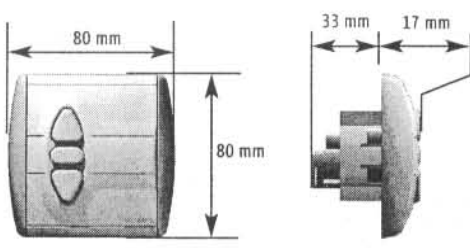
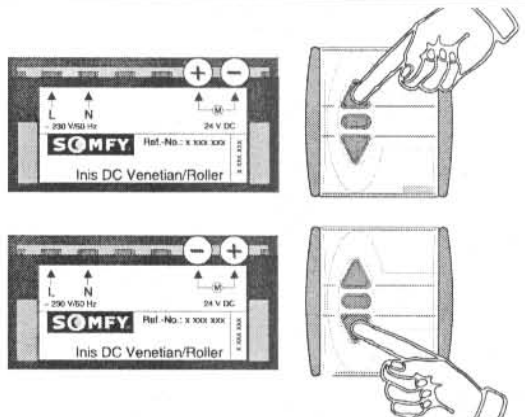
Unit power supply for one LV 25 B 64, one LW 25 B 83, one LT 28 B 73 or

two LV 25 B 44, two LW 25 B 44. **CAUTION : ONLY FOR INTERNAL USE**

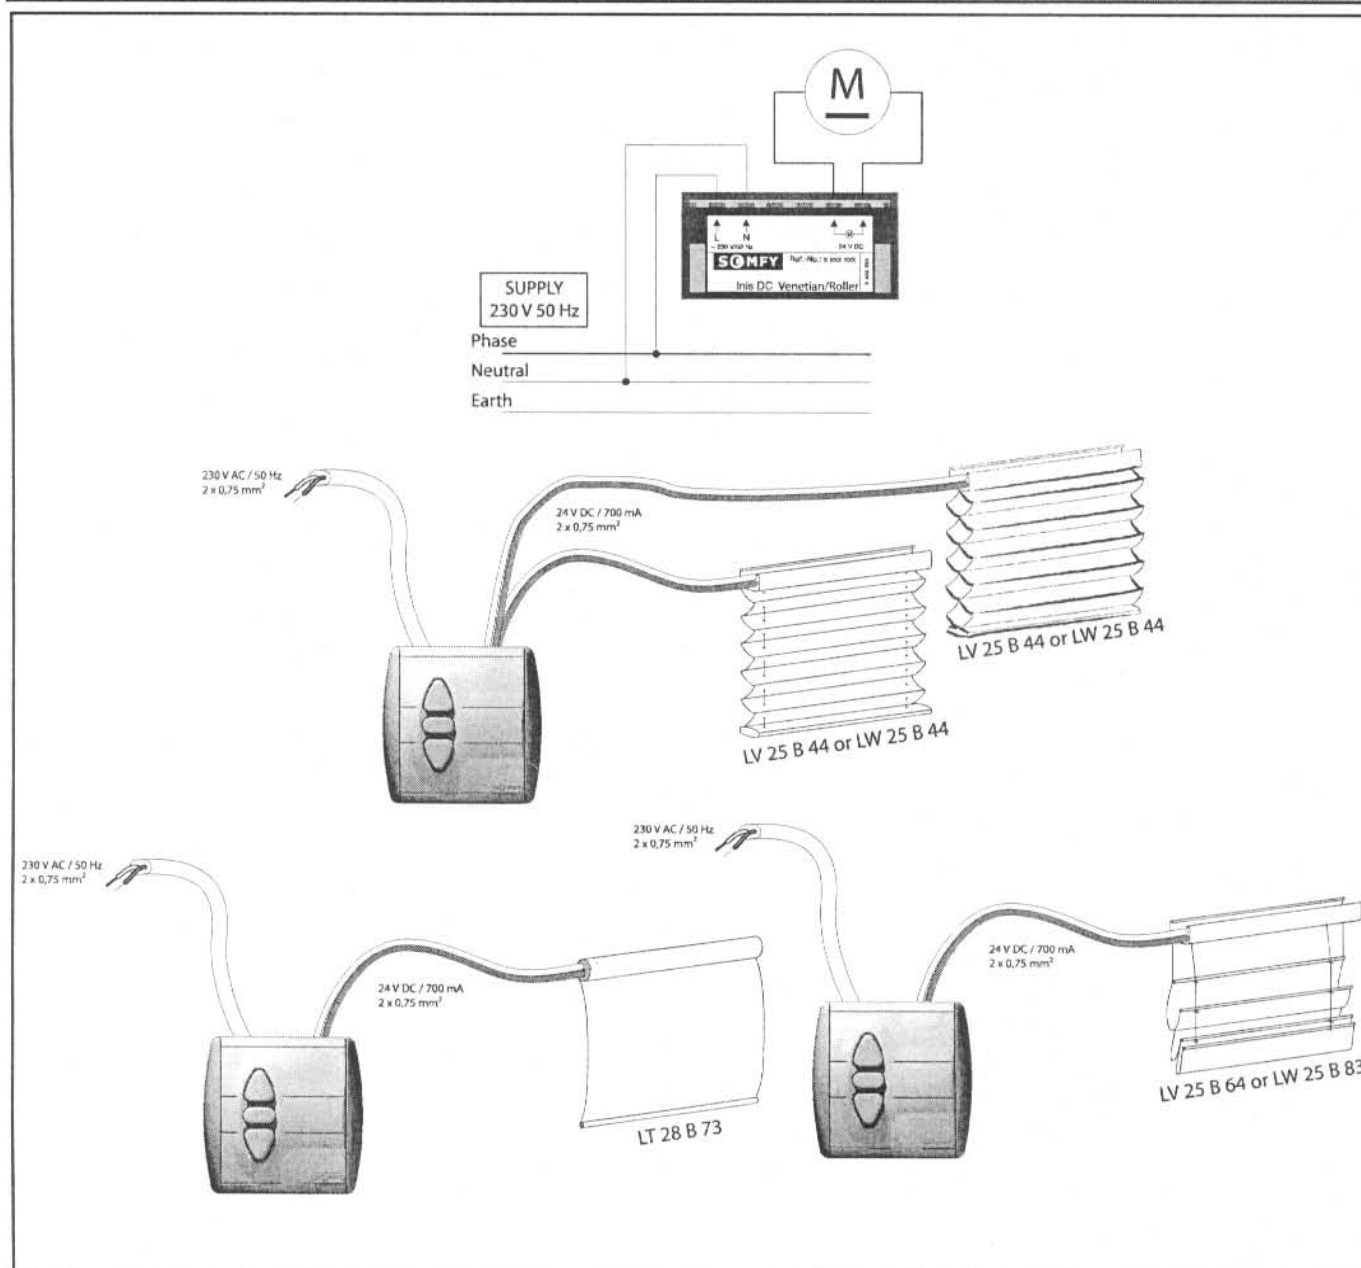

TECHNICAL SPECIFICATIONS

Box	Material	ABS / PC
	Color	Black / white & grey
	Size	80 x 80 x 50
	Protection factor against solid & splashproof	IP 40
Input		Class II product
	Nominal supply voltage	230 V AC
	Limits	195 - 255 V AC
	Frequency	50 - 60 Hz
Output	Voltage at 800 mA	20,4 V DC
	No-load Voltage	22,5 V DC - S. E. L. V.
	Permanent current (time in minutes)	700 mA (5)
	Current limitation	900 mA
	Peak current	1,2 A (60 mS)
	Thermal protection	70°C
	Active for:	3 min
	Reverse pause:	40 mS
Temperature range	Working	+ 5°C to + 40°C
Connectors	Flexible wires	2,5 mm ²
	Rigid wires	4 mm ²
Weight	Without package	110 g
	With package	145 g

ORIGINAL

DIMENTION	POLARITY
	

WIRING



BE	QUALITY	PEU
		