

Drapery Databook

Glydea® ULTRA and Irismo™

somfy®

Table of Contents

Why Somfy? 2

Drapery Motor Range 3-4

Drapery Systems at a Glance 5-6

Motor Features and Main Characteristics
Features Overview Comparision Chart 7-8
Glydea® ULTRA 35 9
Glydea® ULTRA 60 10
Glydea® ULTRA 50 WireFree Zigbee 11
Irismo™ 35 Mini DC 12
Irismo™ 45 WireFree RTS 13

Drapery Motor Wiring Examples 14-15

Glydea® ULTRA and Irismo™ 35 Mini DC Drapery Motors, Integration and Power
Glydea® ULTRA 16
Glydea ULTRA DCT Control Modules 16
Irismo™ 35 16
Integration Control Modules for Irismo™ 35 only 16

Irismo™ 45 Drapery Motor, Integration and Power
Irismo™ 45 17
Power Accessories for Irismo™ 45 17

Glydea® ULTRA 50 Drapery Motor, Integration and Power
Glydea® ULTRA 50 18
Power Accessories for Glydea® ULTRA 50 18

Drapery Controls and Accessories
Zigbee® Technology 19
Radio Technology Somfy® (RTS) 19-20
Somfy Digital Network™ (SDN) 20
Wired Technology 20
Dry Contact Technology (DCT) 20

Drapery Components
Common Track Components 22
Glydea® ULTRA 50 Components 22
Ripplefold® & Accordia® Track Components 23-24
Pinch Pleat Track Components 24
Brackets 25

Product Dimensional Specifications
Carrier Arm Dimensions 26
Wall Bracket Dimensions 26-27
Ceiling Bracket Dimensions 267

Track Configurations 28-29

Track Specification Charts 30-32

Drapery Fabricated Track Options 33

Custom Track Options 34-35

Drapery Order Form & Resources
Drapery Order Form & Resources 36-37
Bent Drapery Track Measurement Form 38
Directions for Creating a Template for Drapery Curves 39

DecoFlex Zigbee Engraving Form 40

DecoFlex Wirefree™ Surface 5 Channel Button Engraving Form 41

DecoFlex Keypad Button Engraving Form 42

Smoove® Wireless Wall Switches Custom Engraving Form 43-46

Pro Tools and Support

The TaHoma® pro app provides hassle-free manufacturing and installation. A revolution in building and programming smart window coverings.

Download on the App Store | GET IT ON Google Play

Serv-e-Go® is a web application for dealers to elevate after-sales support by remotely diagnosing errors and providing real-time support to end users enjoying Zigbee installations.

Help me by Somfy is an app that provides step-by-step guidance when installing Somfy products - no need for paper manuals, regardless of the project.

Reduce the risk of errors, stop wasting time, and enjoy successful motorization installations.

Download on the App Store | GET IT ON Google Play

Somfy's e-learning platform provides access to on-demand training, as well as live training events.

With **Somfy U**, you and your employees can learn about Somfy product and technologies. Plus, be eligible to earn rewards for learning about Somfy solutions upon completion of your first class.

The Somfy Expert Program is designed with a single goal in mind: to help your business thrive.

Our program provides specialized tools, direct support, and on-demand training featuring a growing range of smart home solutions. The Somfy Expert program is designed to help grow your business by creating a smarter, more efficient home for your customers.

A committed customer support team of Somfy motor and control specialists available for assistance:

General Customer Service
877-210-5327 • customerservice_us@somfy.com

Somfy Corporate Headquarters
800-22-SOMFY (76639)

Standard Purchase Order
ordering_us@somfy.com

Rush Purchase Order
expeditedshippingorders_us@somfy.com

Accounting Inquiries
accountsreceivable@somfy.com

Technical Support
877-233-0019
technicalsupport_us@somfy.com

Warranty Claim Requests
us_return@somfy.com

5 YEARS WARRANTY

Somfy understands that training and support are critical to success. Somfy's Expert Program has been developed to provide a platform for those who want to enhance their expertise of motorization and control solutions. Visit **www.somfypro.com** to learn more and sign up for training.

Drapery Motor Range

This document presents the technical information and related accessories for Somfy's Glydea® ULTRA and Irismo™ motor ranges designed specifically for draperies. It provides detailed information to facilitate the specification of these motor solutions and presents information regarding options for specialty applications, including bent and curved tracks. Information for Somfy's entire product range, including motors, power sources, control interfaces, etc. can be accessed at **www.somfypro.com**.

Innovative


These sophisticated motors are the result of industry experience and expertise. Reliable motor solutions offer a superior user experience as well as a wide array of features, while exemplifying Somfy's continued commitment to quality.

Adaptable


Designed for residential, commercial, and hospitality markets, these ranges provide a convenient solution for glare reduction and privacy while also reducing energy costs and protecting interiors from damaging UV rays.

Flexible


Glydea® ULTRA and Irismo™ are available for all drapery types, including Pinch Pleat, Ripplefold®, and Accordia®. Additionally, they have been designed to easily adapt to various control technologies, including Dry Contact, Radio Technology Somfy® (RTS), RS485, and Zigbee®.



Pinch Pleat



Ripplefold®



Accordia®

Compatible with various technologies:

zigbee

RTS Radio Technology Somfy®

Somfy Digital Network RS485

PoE Power over Ethernet

DRY CONTACT

WIRED TECHNOLOGY

Aesthetic

- Clean, premium motor design with built-in control modules.
- Easy to conceal behind drapery fabric.
- Adjustable limit setting provides precise alignment of drapery fabric.
- Advanced track design and swivel ceiling brackets minimize light gaps.
- Soft start and soft stop drapery motion.
- Improved hardware design provides greater overlap and even stack back.

Easy Installation

- Spring loaded one-touch hardware (wall and ceiling mount).
- Motor can be installed to the right or left side of the drapery track.
- Automatic or adjustable limit setting.
- Inverse (top mount) option allows the motor to be installed above the track.

Flexible

- Patented versatile master carrier reduces friction and is adaptable to various drapery types.
- Multiple built-in control options allow seamless integration with third-party systems.
- Adjustable drapery speed control.

Ultra Quiet

- Motor design and advanced high-performance belt drive system provide quiet operation (<38dBA).

Somfy DESIGNED FOR SILENCE

Efficient

- Touch motion feature allows the user to activate the motorized drapery simply by pulling on the fabric.
- Manual override permits the drapery to be adjusted manually, which is ideal for power outages and also protects the fabric from damage.
- The "my" function allows user to set a preferred drapery opening which provides enhanced convenience.

Flexible

Includes 5 years international warranty.
International certifications.

5 YEARS WARRANTY

CE

C US










Zigbee® is a registered trademark of Zigbee® Alliance.
Ripplefold® and Accordia® are registered trademarks of Kirsch.
Amazon, Alexa, and all related logos are trademarks of Amazon.com, Inc. or its affiliates.
All brands, products, and trademarks are the property of their respective owners.

Drapery Systems at a Glance


The difference is in the details.




Track bending and curving options available

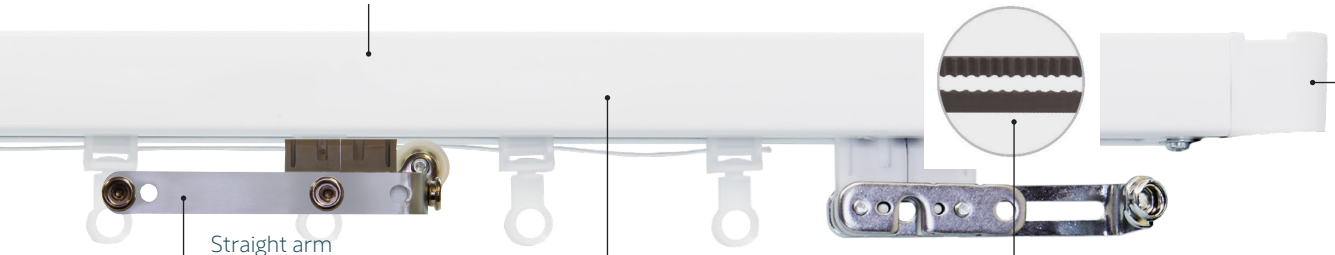

Straight arm



Top down view of straight arm




Easy installation with one-touch ceiling bracket

Belt driven track

Interchangeable left or right side motor mounting option available with center opening track



Swivel ceiling bracket minimizes light gap - recommended for curves



Adjustable wall mount bracket

Features Overview Comparison Chart

	Line Voltage 120V DC				WireFree Battery
	Glydea® ULTRA 35		Glydea® ULTRA 60		Glydea® ULTRA 50 WireFree Zigbee
	DCT	RTS	DCT	RTS	
Motor unit main features					
Soft start	✓	✓	✓	✓	✓
Manual operation	✓	✓	✓	✓	✓
Automatic limits on end stop	✓	✓	✓	✓	✓
Soft stop	✓	✓	✓	✓	✓
Intermediate position	✓	✓	✓	✓	✓
Touch motion with 2 sensitivity settings	✓	✓	✓	✓	✓
Adjustable limits	✓	✓	✓	✓	✓
Speed control & adjustment	✓	✓	✓	✓	✓
Control options					
Dry Contact input via RJ12 Connector	✓	✓	✓	✓	
Dry Contact individual, group and master control	✓	✓	✓	✓	
Radio Technology Somfy® RTS		✓		✓	
SDN RS485 digital technology (two-way communication)	✓	✓	✓	✓	
Zigbee® module (two-way communication)	✓	✓	✓	✓	
Native Zigbee®					✓
Tandem alternative	✓	✓	✓	✓	
Timed events via app	✓	✓	✓	✓	✓
Installation and setting features					
Programming with buttons on motor unit	✓	✓	✓	✓	
Programming with DCT Setting Tool (preferred)	✓		✓		
LED indicators	✓	✓	✓	✓	✓
Motor unit direction change	✓	✓	✓	✓	✓
Factory reset	✓	✓	✓	✓	✓
Inverse (top mount) mounting	✓	✓	✓	✓	✓
Rechargeable battery					✓
Replaceable battery					✓
Tracks/Drapery Types					
One-way opening	✓	✓	✓	✓	✓
Center opening	✓	✓	✓	✓	✓
Asymmetric	✓	✓	✓	✓	✓
Multiple	✓	✓	✓	✓	
Pinch pleat	✓	✓	✓	✓	✓
Ripplefold® with overlap arm	✓	✓	✓	✓	✓
Ripplefold® with butt arm	✓	✓	✓	✓	✓
Accordia®	✓	✓	✓	✓	✓

	Low Voltage 24V DC		WireFree Battery (Li-ion Rechargeable)
	Irismo™ 35 RTS	**Irismo™ 35 DCT**	**Irismo™ 45 WireFree RTS**
Motor unit main features			
Soft start	✓	✓	✓
Manual operation	✓	✓	✓
Automatic limits on end stop	✓	✓	✓
Soft stop	✓	✓	✓
Intermediate position	✓	✓	✓
Touch motion with 2 sensitivity settings	✓	✓	✓
Adjustable limits	✓	✓	✓
Speed control & adjustment	✓	✓	✓
Control options			
Dry Contact input via RJ12 Connector	✓	✓	
Dry Contact individual, group and master control	✓	✓	
Radio Technology Somfy® RTS	✓		✓
SDN RS485 digital technology (one-way communication)	✓	✓	
Tandem alternative	✓	✓	✓
Timed events via app	✓	✓	✓
Installation and setting features			
Programming with DCT Setting Tool (preferred)	✓	✓	
LED indicators	✓	✓	✓
Motor unit direction change	✓	✓	✓
Factory reset	✓	✓	✓
Inverse (top mount) mounting	✓	✓	✓
Rechargeable battery			✓
Replaceable battery			✓
Tracks/Drapery Types			
One-way opening	✓	✓	✓
Center opening	✓	✓	✓
Asymmetric	✓	✓	✓
Multiple	✓	✓	
Pinch pleat	✓	✓	✓
Ripplefold® with overlap arm	✓	✓	✓
Ripplefold® with butt arm	✓	✓	✓
Accordia®	✓	✓	✓

Glydea® ULTRA 35
Technical Specifications

Motor part numbers

Glydea® ULTRA 35 RTS motor (with 10' cable and molded NEMA plug)	Part# 1246116
Glydea® ULTRA 35 DCT motor (with 10' cable and molded NEMA plug)	Part# 1246115
Glydea® ULTRA 35 Wired motor (5' long without plug)	Part# 1003153


Features overview

	Glydea® ULTRA 35
Motor unit main features	
Soft start	✓
Manual operation	✓
Automatic limits on end stop	✓
Soft stop	✓
Intermediate position	✓
Touch motion with 2 sensitivity settings	✓
Adjustable limits	✓
Speed control & adjustment	✓
Control options	
Dry Contact input via RJ12 Connector	✓
Dry Contact individual, group and master control	✓
Radio Technology Somfy® RTS	✓
SDN RS485 digital technology module (two-way communication)	✓
Zigbee® module (two-way communication)	✓
Tandem alternative	✓
Timed events via app (except for DCT and Wired)	✓
Installation and setting features	
Programming with buttons on motor unit	✓
Programming with DCT Setting Tool (preferred)	✓
LED indicators	✓
Motor unit direction change	✓
Factory reset	✓
Inverse (top mount) mounting	✓
Tracks/Drapery Types	
One-way opening	✓
Center opening	✓
Asymmetric	✓
Multiple	✓
Pinch pleat	✓
Ripplefold® with overlap arm	✓
Ripplefold® with butt arm	✓
Accordia®	✓

Motorized track main characteristics

	Glydea® ULTRA 35
Power Supply	120V AC 50/60 HZ
Amperage	0.8 A
Adjustable nominal speed	Silent Mode: 2.95 in./s (7.5 cm/s) Standard Mode: 4.95 in./s -7.86 in./s (12.5 cm/s-20 cm/s)
Power consumption	96W (standby <1W)
Power cable type	3-wire cable with molded NEMA plug 4-wire cable (wired version only)
Control connector type (Dry Contact)	RJ12
DCT control circuit voltage	3.3V DC
Motor sound level	<38 dBA at silent mode
Certifications	c TUV us, CE
Track maximum length	32 ft. (9.7 m)
Maximum number of splices	2
Minimum bending radius	11.8 in. (30 cm)
Minimum curving radius	118 in. (300 cm)
Side opening max weight	77 lbs. 35 kg.
Center opening max weight	77 lbs. 35 kg.
Tandem alternative (see pages 23, 24, 26)	154 lbs./ 70 kgs. 64 ft./ 19.4 m

Motor dimensions

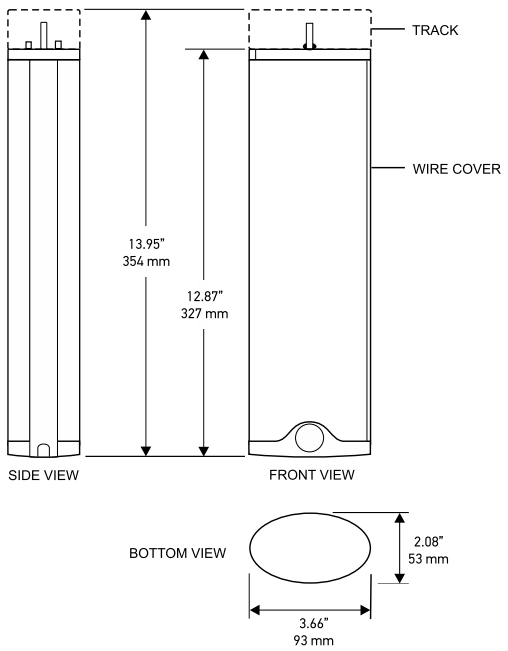

Glydea® ULTRA 60
Technical Specifications

Motor part numbers

Glydea® ULTRA 60 RTS motor (with 10' cable and molded NEMA plug)	Part# 1246118
Glydea® ULTRA 60 DCT motor (with 10' cable and molded NEMA plug)	Part# 1246117
Glydea® ULTRA 60 Wired motor (5' long without plug)	Part# 1003160


Features overview

	Glydea® ULTRA 60
Motor unit main features	
Soft start	✓
Manual operation	✓
Automatic limits on end stop	✓
Soft stop	✓
Intermediate position	✓
Touch motion with 2 sensitivity settings	✓
Adjustable limits	✓
Speed control & adjustment	✓
Control options	
Dry Contact input via RJ12 Connector	✓
Dry Contact individual, group and master control	✓
Radio Technology Somfy® RTS	✓
SDN RS485 digital technology module (two-way communication)	✓
Zigbee® module (two-way communication)	✓
Tandem alternative	✓
Timed events via app (except for DCT and Wired)	✓
Installation and setting features	
Programming with buttons on motor unit	✓
Programming with DCT Setting Tool (preferred)	✓
LED indicators	✓
Motor unit direction change	✓
Factory reset	✓
Inverse (top mount) mounting	✓
Tracks/Drapery Types	
One-way opening	✓
Center opening	✓
Asymmetric	✓
Multiple	✓
Pinch pleat	✓
Ripplefold® with overlap arm	✓
Ripplefold® with butt arm	✓
Accordia®	✓

Motorized track main characteristics

	Glydea® ULTRA 60
Power Supply	120V AC 50/60 HZ
Amperage	0.8 A
Adjustable nominal speed	Silent Mode: 2.95 in./s (7.5 cm/s) Standard Mode: 4.95 in./s -7.86 in./s (12.5 cm/s-20 cm/s)
Power consumption	96W (standby <1W)
Power cable type	3-wire cable with molded NEMA plug 4-wire cable (wired version only)
Control connector type (Dry Contact)	RJ12
DCT control circuit voltage	3.3V DC
Motor sound level	<38 dBA at silent mode
Certifications	c TUV us, CE
Track maximum length	36 ft. (10.9 m)
Maximum number of splices	2
Minimum bending radius	11.8 in. (30 cm)
Minimum curving radius	118 in. (300 cm)
Side opening max weight	132 lbs. 60 kg.
Center opening max weight	132 lbs. 60 kg.
Tandem alternative (see pages 23, 24, 26)	264 lbs./ 120 kgs. 72 ft./ 21.8 m

Motor dimensions

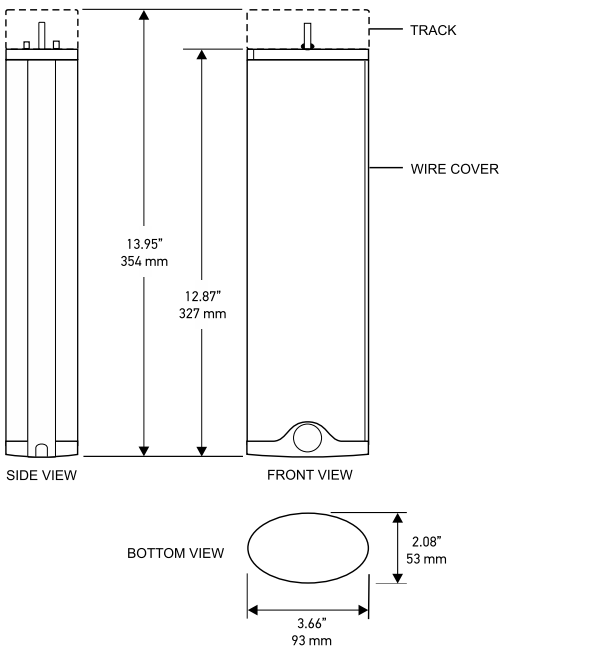

Glydea® ULTRA 50 WireFree Zigbee

Technical Specifications

Motor part numbers

Glydea® ULTRA 50 WireFree Zigbee	Part# 1246594


Features overview

	Glydea® ULTRA 50 WireFree Zigbee
Motor unit main features	
Soft start	✓
Manual operation	✓
Automatic limits on end stop	✓
Soft stop	✓
Intermediate position	✓
Touch motion with 2 sensitivity settings	✓
Adjustable limits	✓
Speed control & adjustment (adjustable via app)	✓
Control options	
Scene control via app	✓
Percentage positions	✓
Native Zigbee® (two-way communication)	✓
Timed events via app	✓
Installation and setting features	
Programming with buttons on motor unit	✓
LED indicators	✓
Motor unit direction change	✓
Factory reset	✓
Inverse (top mount) mounting	
Tracks/Drapery Types	
One-way opening	✓
Center opening	✓
Asymmetric	✓
Multiple	
Pinch pleat	✓
Ripplefold® with overlap arm	✓
Ripplefold® with butt arm	✓
Accordia®	✓

Motorized track main characteristics

	Glydea® ULTRA 50 WireFree Zigbee
Power Supply	Rechargeable 21.9V li-ion battery pack
Amperage	1.2 A at default speed (15cm/s)
Adjustable nominal speed	Discreet Mode: 2.9 in./s (7.5 cm/s) Default: 5.9 in./s (15 cm/s) Adjustable : 4.9 in./s - 6.89 in./s 12.5 cm/s - 17.5 cm/s
Power consumption	Rated power: 30W Standby power: <0.002W
Power cable type	USB-C
Radio protocol	Zigbee 3.0, Bluetooth 4.2
Radio frequency	2.4Ghz
Rechargeable (Li-ion) battery capacity	2600mAh
Charging time	<4h for 80% of the capacity
Motor sound level	<32 dBA at silent mode
Certifications	c TUV us, CE, cULus listed, FCC, Bluetooth
Track maximum length	36 ft. (10.9 m)
Maximum number of splices	2
Minimum bending radius	11.8 in. (30 cm)
Minimum curving radius	118 in. (300 cm)
Side opening max weight	110 lbs. (50kg)
Center opening max weight	110 lbs. (50kg)

Motor dimensions

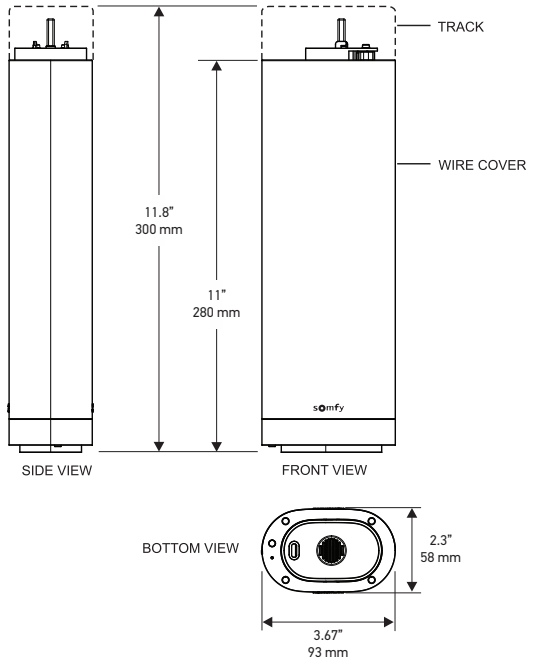

Irismo™ 35 Mini DC
Technical Specifications

Motor part numbers

Irismo™ 35 Mini DC RTS	Part# 1003004
Irismo™ 35 Mini DC DCT	Part# 1003003


Features overview

	Irismo™ 35 RTS	Irismo™ 35 DCT
Motor unit main features		
Soft start	✓	✓
Soft stop	✓	✓
Manual operation	✓	✓
Automatic limits on end stop	✓	✓
Intermediate position	✓	✓
Touch motion with 2 sensitivity settings	✓	✓
Adjustable limits	✓	✓
Speed control & adjustment	✓	✓
Control options		
Dry Contact input via RJ12 connector	✓	✓
Radio Technology Somfy® RTS	✓	
Tandem alternative	✓	✓
SDN RS485 digital technology (one-way communication)	✓	✓
Zigbee® (one-way communication)		
Timed events via app	✓	✓
Installation and setting features		
Programming with DCT Setting Tool (preferred)	✓	✓
LED indicators	✓	✓
Motor unit direction change	✓	✓
Factory reset	✓	✓
Inverse mounting (top mount)	✓	✓
Tracks/Drapery Types		
One-way opening	✓	✓
Center opening	✓	✓
Asymmetric	✓	✓
Multiple	✓	✓
Pinch pleat	✓	✓
Ripplefold® with overlap arm	✓	✓
Ripplefold® with butt arm	✓	✓
Accordia®	✓	✓

Motorized track main characteristics

	Irismo™ 35 RTS	Irismo™ 35 DCT
Power Supply	24V DC	
Power adaptor amperage	2 A	
Adjustable nominal speed	4.9 in./s - 7.86 in./s 12.5 cm/s - 20 cm/s	
Power consumption	<3W (standby)	
Power adaptor cable length	13.2 ft. (4 m)	
Control connector type	RJ12	
DCT control circuit voltage	5V DC	
Motor sound level	<44 dBA	
Certifications	CE	
Track maximum length	32 ft. (9.7 m)	
Maximum number of splices	2	
Minimum bending radius	11.8 in. (30 cm)	
Minimum curving radius	118 in. (300 cm)	
Side opening max weight	77 lbs. (35 kg)	
Center opening max weight	77 lbs. (35 kg)	
Tandem alternative (see pages 23, 24, 26)	154 lbs. (70 kg)	

Motor dimensions

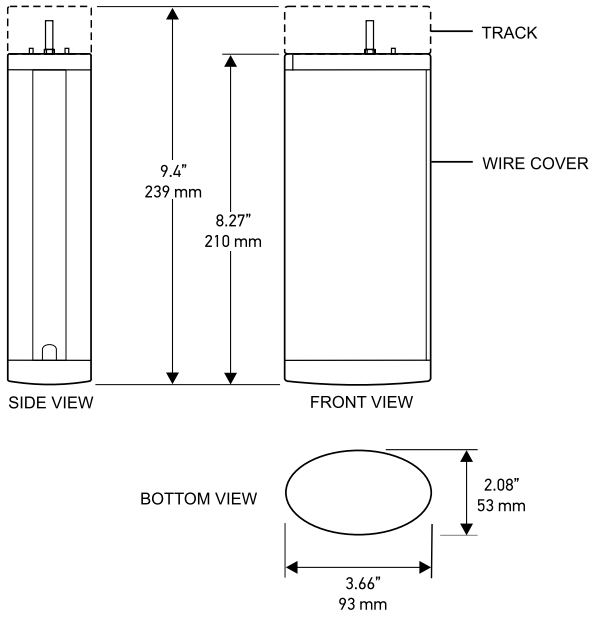

Irismo™ 45 WireFree RTS
Technical Specifications

Motor part numbers

Irismo™ 45 WireFree RTS	Part# 1002353


Features overview

	Irismo™ 45 WireFree RTS
Motor unit main features	
Soft start	✓
Soft stop	✓
Manual operation	✓
Intermediate position	✓
Touch motion with 2 sensitivity settings	✓
Adjustable limits	✓
Speed control & adjustment	✓
Control options	
Radio Technology Somfy® RTS	✓
Tandem alternative	✓
Timed events via app	✓
Installation and setting features	
LED indicators	✓
Audible sound Indicator	✓
Motor unit direction change	✓
Factory reset/programming button	✓
Inverse mounting (top mount)	✓
Rechargeable battery	✓
Replaceable battery	✓
Tracks/Drapery Types	
One-way opening	✓
Center opening	✓
Asymmetric	✓
Pinch pleat	✓
Ripplefold® with overlap arm	✓
Ripplefold® with butt arm	✓
Accordia®	✓

Motorized track main characteristics

	Irismo™ 45 WireFree RTS
Power Supply	25.9V DC
Adjustable nominal speed	4.9 in./s - 7.86 in./s 12.5 cm/s - 20 cm/s
Power consumption	1.5A
Rated power	45W
Standby power	<0.006W
Rechargeable (Li-ion) battery capacity	3200 mAh
Motor sound level	<44 dBA
Certifications	CE/cTUV
Track maximum length	33 ft. (10 m)
Maximum number of splices	2
Minimum bending radius	11.8 in. (30 cm)
Minimum curving radius	118 in. (300 cm)
Side opening max weight	99 lbs. (45 kg)
Center opening max weight	99 lbs. (45 kg)
Tandem alternative (see pages 23, 24, 26)	198 lbs. (90 kg)


Motor dimensions

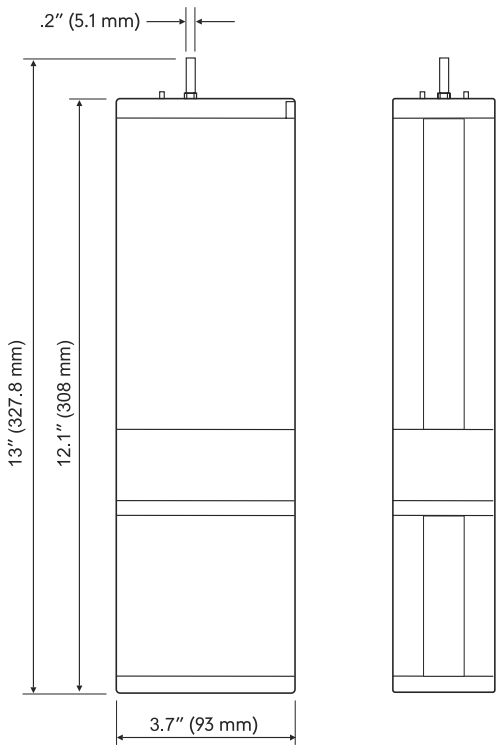


Drapery Motor Wiring Examples

Zigbee® Control


Individual control

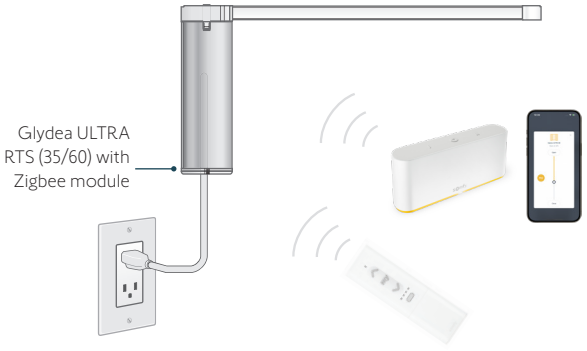


Group control

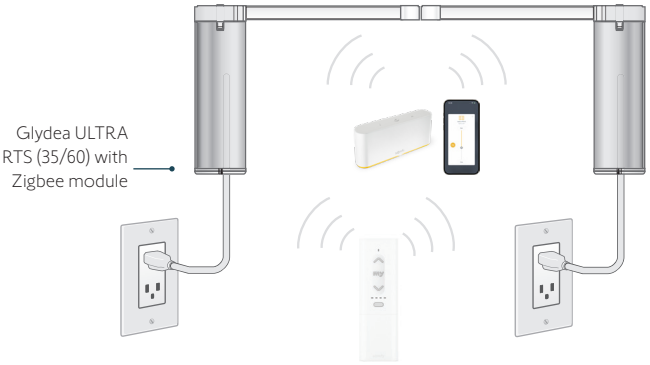

Individual control

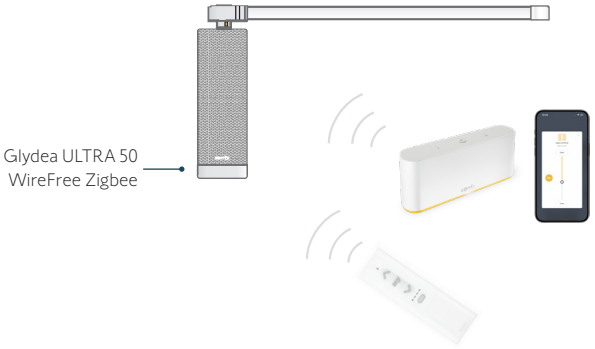


Group control

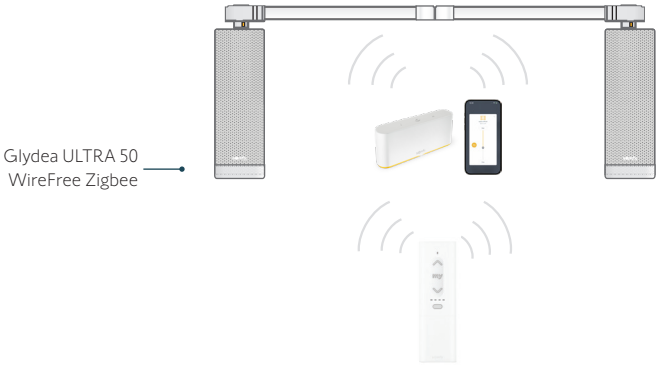

Radio Technology Somfy® (RTS) Control

Individual control

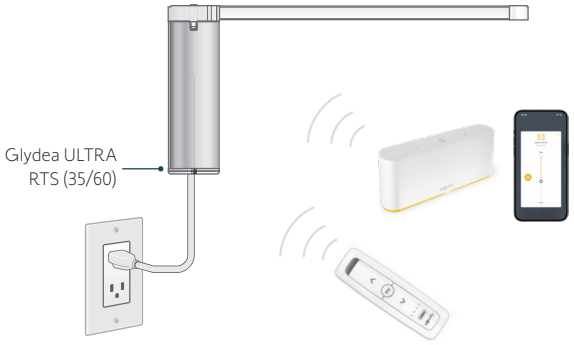

Group control



NOTE: Examples are for illustrative purposes. Additional components may be needed depending on your installation.
Applies to Glydea ULTRA range only.

Drapery Motor Wiring Examples

Dry Contact Technology (DCT) Control


DRY CONTACT

The Dry Contact Control can be done through devices with 2 normally open contacts (open, close) or 3 normally open contacts (open, stop, close). For devices using 2 contacts, the stop command is achieved by closing the open and close contacts. For 3 devices, the stop can also be achieved with a specific stop button.


Number of DCT Drapery Motors and Length of Control Limitations

Wire Cross-Section	Maximum Length of Cable	Maximum Number of Motors
Cat5 or Equal	328 ft. (100 m)	10
0.75 mm²	656 ft. (200 m)	20


Individual control

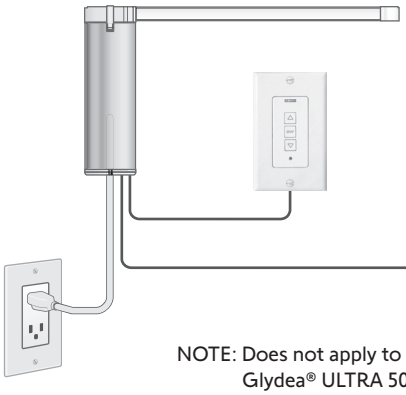

RJ12 Socket Pin Out

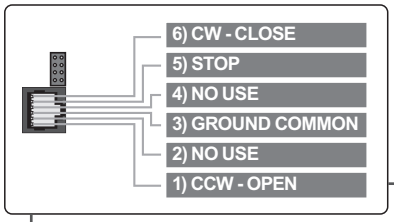

Group control

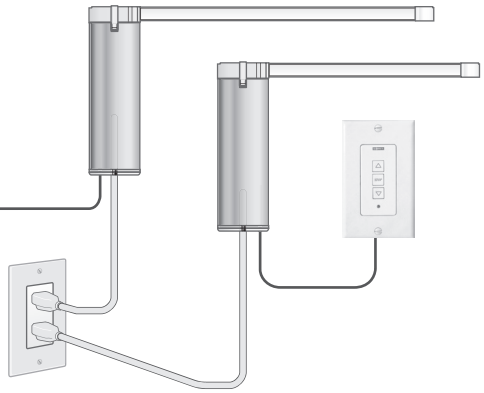


NOTE: Does not apply to Irismo™ 45 WireFree or Glydea® ULTRA 50 WireFree Zigbee

Wired Control


WIRED TECHNOLOGY

Individual control

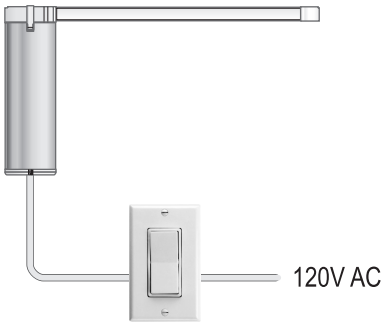

Red	Dir1
Black	Dir2
White	Neutral
Green	Ground


Group control

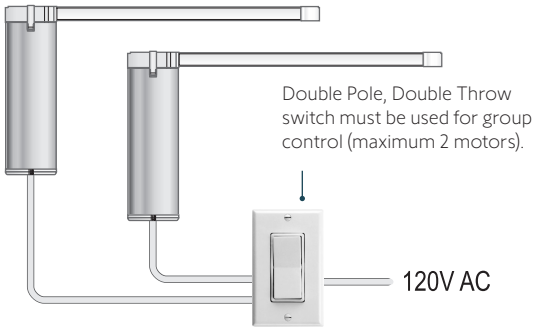


Somfy Digital Network™ (SDN) Wiring Examples

Somfy Digital Network RS485


Plug-in:

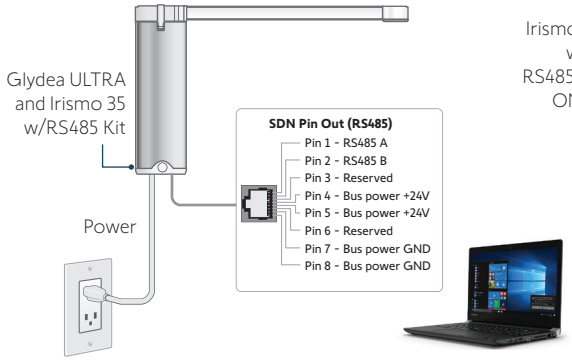

Power Panel:

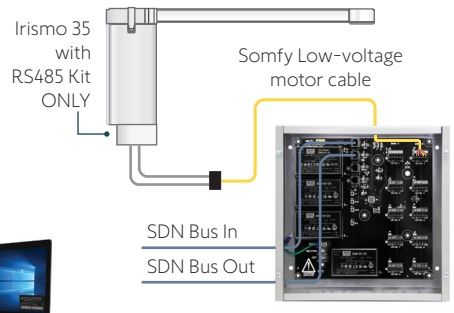

Power over Ethernet (PoE):

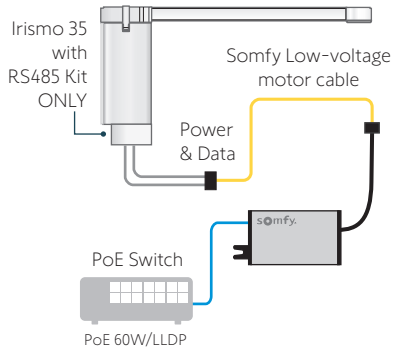

NOTE: Contact Somfy for additional details.

NOTE: Examples are for illustrative purposes. Additional components may be needed depending on your installation. Does not apply to Irismo™ 45 WireFree or Glydea® ULTRA 50 WireFree Zigbee. Not compatible with TaHoma.

Glydea® ULTRA and Irismo™ 35 Mini DC Drapery Motors, Integration and Power

Glydea® ULTRA

Glydea® ULTRA 35 and Glydea® ULTRA 60



Glydea® ULTRA 35

RTS with 10' Plug	1246116
DCT with 10' Plug	1246115
Wired w/o Plug	1003153

Glydea® ULTRA 60

RTS with 10' Plug	1246118
DCT with 10' Plug	1246117
Wired w/o Plug	1003160

Glydea® ULTRA Control Modules

Zigbee®



Plug-in module integrates with Zigbee systems

9000043

SDN RS485



RS485 Two-way Module for Glydea® ULTRA Motors

1871412

Irismo™ 35

Irismo™ 35 Mini DC



RTS 1003004
DCT 1003003

(24V DC power supply included)
(Optional power panels available)

Please see pages 13 and 14 for wiring examples.

DC Control Card Enclosure



DC Control Card Enclosure
9021132


Enclosure/Control Kits

SDN Irismo™ 35 24V Mini DC Control Enclosure Kit (includes cable for SDN & PoE)

1870282

Irismo™ 35 Control Modules

SDN RS485




RS485 plug-in module integrates with Somfy Digital Network™ systems

1811129

Irismo™ 35 Power Panels

Surface-mount Power Panel

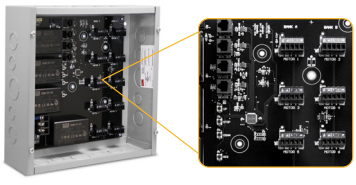

SDN PowerConnect™ Surface-Mount Panel

Adds 10 isolated motor ports and two isolated device ports to an SDN bus segment.

1871026

Rack-mount Power Panel



SDN PowerConnect™ Rack-Mount Panel

Adds eight isolated motor ports and two isolated device ports to an SDN bus segment per panel.

Single Kit: 1871027
Dual Kit: 1871312

Irismo™ 45 Drapery Motor, Integration and Power

Irismo™ 45

Irismo™ 45 WireFree RTS



1002353

Rechargeable Lithium-ion
battery pack included

Power Accessories for Irismo™ 45



Plug-in Battery Charger for Irismo™ 45
with 5 ft. cable - 20 AWG

1003080



Replacement 25.9V Rechargeable
Li-ion Battery for Irismo™ 45

9026476

Glydea® ULTRA 50 Drapery Motor, Integration and Power

Glydea® ULTRA 50

Glydea® ULTRA 50 WireFree Zigbee



1246594

Power Accessories for Glydea® ULTRA 50



Glydea® ULTRA 50 Replacement
USB-C Li-ion Battery

9029424



USB-C Li-ion Fast Charger
(with Cable)

9028923

Drapery Controls and Accessories

Zigbee® Technology

TaHoma® switch



TaHoma® switch
1871037

TaHoma® switch
(with ethernet adaptor)
1871038



TaHoma® switch
Ethernet Adaptor
9028054

Smart Plug



Smart Plug Zigbee
1871217

Glydea® ULTRA Control Module



Zigbee (2-Way) Module for
Glydea® ULTRA 35/60 Motors
9000043

Ysia®



Ysia® 1 Zigbee
1871153



Ysia® 5 Zigbee
1871154



Ysia® 5 Variation Zigbee
1871281

DecoFlex WireFree™ Wall Switches



DecoFlex WireFree™ Zigbee,
White 2 Channel

Surface-mount
1871577

In-wall
1871573



DecoFlex WireFree™ Zigbee,
White 4 Channel

Surface-mount
1871576

In-wall
1871572

Radio Technology Somfy® (RTS)

Situo & Telis Collections



Situo® 1 RTS Pure Single
Channel Remote
1870571



Situo® 5 RTS Pure
Five Channel Remote
1870575



Situo® 5 RTS Soliris
Five Channel Remote
1870579



Situo® 5 RTS Variation
Five Channel Remote
1811612



Telis 1 RTS Patio
Single Channel Remote
1810643



Telis 4 RTS Patio
Five Channel Remote
1810645



Telis 16 Channel RTS Pure
Remote with
On-screen display
1811081



Telis 16 Channel RTS Silver
Remote with
On-screen display
1811082



Telis 1 Chronis RTS Pure
Timer with
On-screen display
1805237

NOTE: For additional information regarding Zigbee® or RTS controls, contact Somfy Systems, Inc.

Drapery Controls and Accessories

Radio Technology Somfy® (RTS)

DecoFlex WireFree™ Wall Switches



DecoFlex 1
Channel RTS
WireFree™ Wall Switch
White
1810897
Black
1810899



DecoFlex 2
Channel RTS
WireFree™ Wall Switch
White
1811068
Black
1811067



DecoFlex 3
Channel RTS
WireFree™ Wall Switch
White
1811071
Black
1811070



DecoFlex 4
Channel RTS
WireFree™ Wall Switch
White
1811074
Black
1811073



DecoFlex 5
Channel RTS
WireFree™ Wall Switch
White
1810813
Black
1810830

- Wall Switches shown in white. Black finish is also available.
- Switches are shown assembled with printed channel buttons.
- Custom engraved buttons are also available.



DecoFlex WireFree™
3-Button RTS
White
1870908



DecoFlex WireFree™
Surface RTS
5 Channel
White
1871025

- Wall Switches are only available in white.

Table Top Accessories



DecoFlex WireFree™
RTS Table Top
Accessory
Black
1811051*



DecoFlex WireFree™
RTS Table Top
Accessory
White
1811185*

*DecoFlex Switch is sold separately from Table Top Accessory.

Smoove® Wall Switches



Smoove® 1 RTS Pure II
181361



Smoove® 4 RTS Pure II
181381

- Battery-operated convenience
- Surface mounts with ease
- Frames available in 3 colors

Pure Silver Matte Black

TaHoma® switch



TaHoma® switch
1871037

TaHoma® switch
(with ethernet adaptor)
1871038



TaHoma® switch
Ethernet Adaptor
9028054

16 Channel RTS Interface



Universal RTS Interface 16-Channel
(converts IR, RS232, RS485 to RTS)
1810872

NOTE: For additional information regarding Zigbee® or RTS controls, contact Somfy Systems, Inc.

Drapery Controls and Accessories

Somfy Digital Network™ (SDN)

Control4® to Digital Motor Interface



Receives Zigbee transmissions and converts them to motor control commands

1870533

Interfaces



Somfy Connect Universal Automation Interface (UAI) Plus

Commission and integrate Somfy-powered SDN solutions over IP

1870272




Somfy Connect BMS Interface V2

Provides communication between building management systems and SDN motorized shading systems

1871168

SDN RS485 Control Modules



RS485 Module for Irismo™ 35 Motors (Irismo DCT to RS485 Upgrade)

Converts SDN signals to control commands to operate Irismo™ 35 motors

1811129



RS485 (2-Way) Module for Glydea® ULTRA Motors

Converts SDN signals to control commands to operate Glydea® ULTRA RTS (35/60) motors

1871412

Wired Technology

Decorator Paddle Switches



Maintained White

1800374

Double Pole, Double Throw

1800375

Dry Contact Technology (DCT)

Dry Contact Switches



White

1800219

Limit Setting Tool



9014599*

8 ft. Cable with RJ12 Plug (required)

9015443

*For use with Glydea ULTRA wired motors only.

Drapery Components

Common Track Components

Small Drive Pulley



White
1782318



Bronze
1782861



Black
9026927

Drive Pulley



White
1782318



Bronze
1782861



Black
9026933

Pulley Cover



White
1780898



Bronze
1782868



Black
9026931

Straight Rail Joint



1782316

Heavy Duty Master Carriers



1781344



Silent Master Carrier*
1782922

*Must be used with
Fixing holder 9027657

High Performance 10mm Belt



196.8 ft. per roll
1782084

Tracks



White
96 ft. per carton
(6 pcs. x 16 ft.)
1780899



Bronze
228 ft. per carton
(12 pcs x 19 ft.)
9025133



Black
96 ft. per carton
(6 pcs. x 16 ft.)
9029902

*Sold by Foot in increments as noted

Glydea® ULTRA 50 Components

Drive Pulley



9029481
Allows 0, 90, 180, -90°
positioning for various
type of curtains*

Drive Pulley Adaptor



9029482
Adaptor to connect Gyldea®
ULTRA WireFree 50 Zigbee
to standard drive pulley*

Motor Return Hook/Snap



9029480
Mounts to the Gyldea®
ULTRA WireFree 50
Zigbee motor*

*For use with Gyldea® ULTRA WireFree 50 Zigbee motor only

Drapery Components

Ripplefold® & Accordia® Track Components

Straight Arm Kit



1782321
For use with center opening draperies



Black
9026935

Overlap Arm Kit



1780947
For use with tandem alternative straight arm

One Way Overlap Arm Kit



1782320
For use with one way and center opening draperies



Black
9026937

Ripplefold® Butt Master Arms Kit



1780953
For use with center opening draperies only

One Way Ripplefold® Butt Arm Kit



1782319
For use with Ripplefold one way opening and double track tandem alternative

Straight Arm Kit



1782662
For use with tandem butted tracks alternative draperies (to be used together)

Fixing Holder for Ripplefold Runner



9027657
For use with Ripplefold carriers, attaches to the master carrier and first Ripplefold carrier

90 Degree Drapery Motor Adaptor Plate



9027179
For use with Ripplefold draperies to provide more aesthetic look

Adjustable Ripplefold Arm Kit



9027045
For use with Ripplefold draperies to provide more aesthetic look

Ripplefold® and Accordia® Type Carriers



80% Fullness (White)
Carrier Spacing: 2 3/8"
Qty. per roll: 500
1780903



100% Fullness (White)
Carrier Spacing: 2 1/8"
Qty. per roll: 500
1780902



120% Fullness (White)
Carrier Spacing: 1 7/8"
Qty. per roll: 500
1780901



Ripplefold Silent Runners 80% (White)
Carrier Spacing: 2 3/8"
Qty. per roll: 250
9027592



Ripplefold Silent Runners 100% (White)
Carrier Spacing: 2 1/8"
Qty. per roll: 250
9027593



Ripplefold Silent Runners 120% (White)
Carrier Spacing: 1 7/8"
Qty. per roll: 250
9027594



80% Fullness (Bronze)
Carrier Spacing: 2 3/8"
Qty. per roll: 500
1782872



100% Fullness (Bronze)
Carrier Spacing: 2 1/8"
Qty. per roll: 500
1782871



120% Fullness (Bronze)
Carrier Spacing: 1 7/8"
Qty. per roll: 500
1782870



80% Fullness (Black)
Carrier Spacing: 1 7/8"
Qty. per roll: 500
9026939



100% Fullness (Blck)
Carrier Spacing: 1 7/8"
Qty. per roll: 500
9026938

NOTE: Recommended for use with Somfy Ripple Snap Tape (ordered separately), but also adaptable to Kirsch and Graber snap tape.
Accordia® type carrier consists of Pinch Pleat carrier and Ripplefold® pendant.

Drapery Components

Ripplefold® & Accordia® Track Components

Ripple Pendant Only



White
1780948

Ripple Tape



100 yd. roll: 1782301
Per yd.: 1782542

Ripple Return Snap



White
1780905



Bronze
1782863



Black
9026940

Pinch Pleat Track Components

Straight Arm Kit



1782321
For use with center opening draperies



Black
9026935

Overlap Arm Kit



1782320
For use with one way and center opening draperies

Heavy Duty Straight Arm



Black
9026936

Pinch Pleat Return Hook



White
1780895



Bronze
1782862



Black
9026928

*Used with standard Drive Pulley

Carrier



White
1781415*

Silent Carrier (white only)
1782921



Bronze
1782869

High Performance
Rotating Eye Runner



Black
9026932

*Used with standard Drive Pulley

One Way Overlap Arm Kit



1780947
For use with tandem alternative straight arm

Straight Arm Kit



1782662
For use with tandem butted tracks alternative draperies (to be used together)

Drapery Components

Brackets

One Touch Ceiling Bracket



White
1780907



Bronze
1782865



Black
9028544

Adjustable Wall Mount Bracket



White
Projection 4.5" - 6"
1780909



Bronze
Projection 4.5" - 6"
1782866



Black
Projection 4.5" - 6"
9026930

Double Adjustable Wall Mount Bracket



White
Projection 8.75" - 10.25"
1780910



Bronze
Projection 8.75" - 10.25"
1782867

Swivel Ceiling Bracket



White
1780906



Bronze
1782864



Black
9026929

Adjustable Wall/Ceiling Mount Bracket Kit



White
Projection 4.5" - 6"
1782054



Bronze
Projection 4.5" - 6"
9025621

Double Adjustable Wall/Ceiling Mount Bracket Kit



White
Projection 8.75" - 10.25"
1782053




Bronze
Projection 8.75" - 10.25"
9025622


Product Dimensional Specifications

Carrier Arm Dimensions


Overlap Arm - #1782320

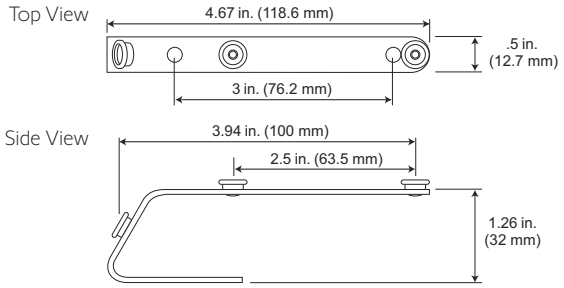

Overlap Arm - #1780947

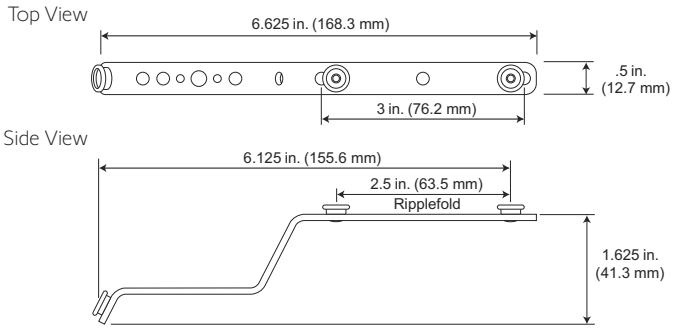


Straight Arm* - #1782321

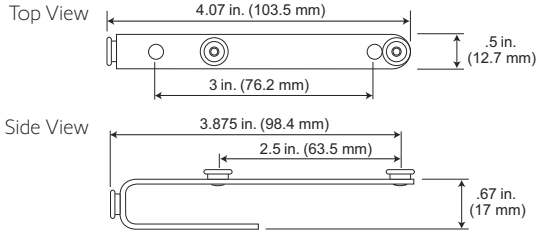


*For use with one-way opening with standard drive pulley.


Straight Arm - #1782662

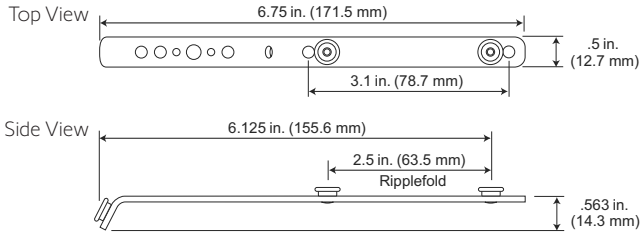


One Way Butt Arm - #1782319

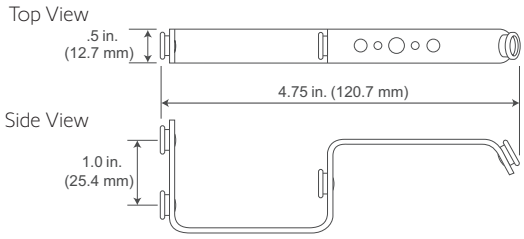


Adjustable Ripplefold Arm kit - #9027045

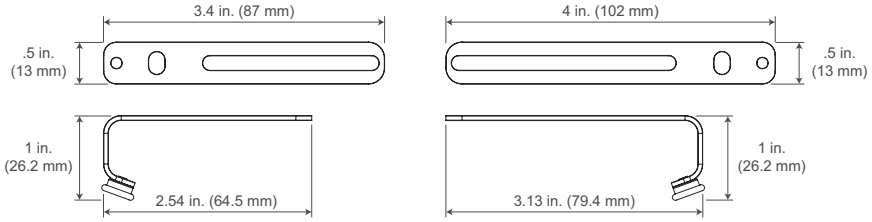

Butt Master Arm Center Opening - #1780953




Fixing Holder for Ripplefold Runner - #9027657

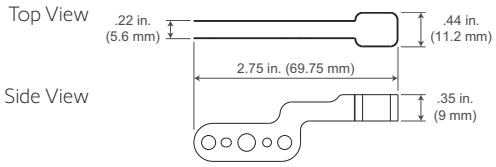


Wall Bracket Dimensions

Adjustable Wall Mount Bracket - #1780909 & 1782866

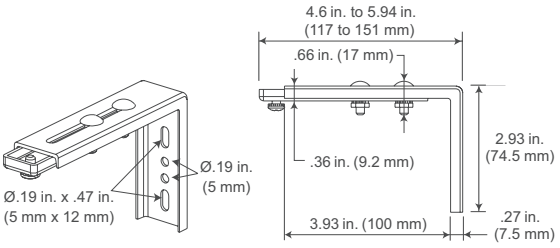


Double Adjustable Wall Mount Bracket - #1780910 & 1782867

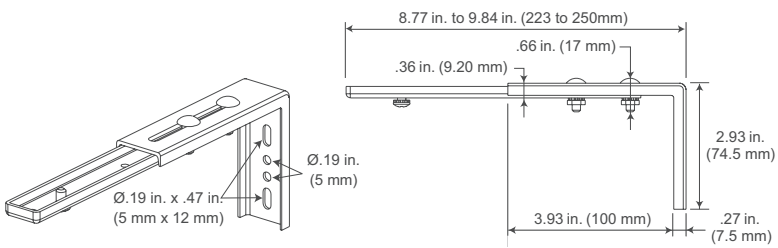


Product Dimensional Specifications

Track Profile

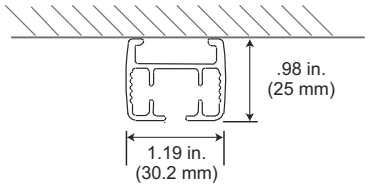


Ceiling Bracket Dimensions


One Touch Ceiling Bracket - #1780907 & 1782865

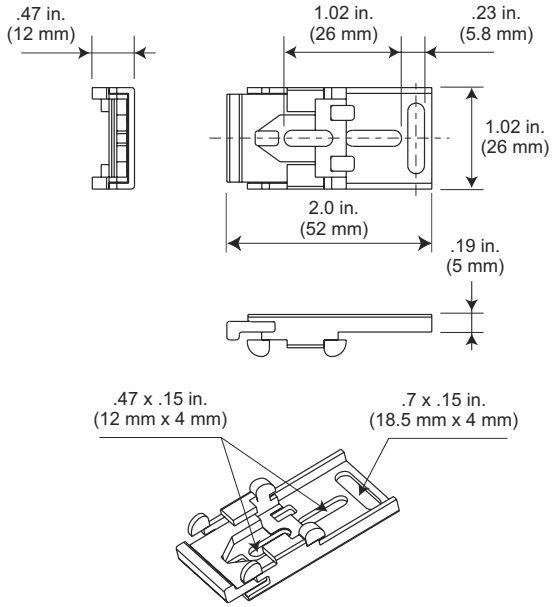

Swivel Ceiling Bracket - #1780906 & 1782864
(recommended for curved tracks)

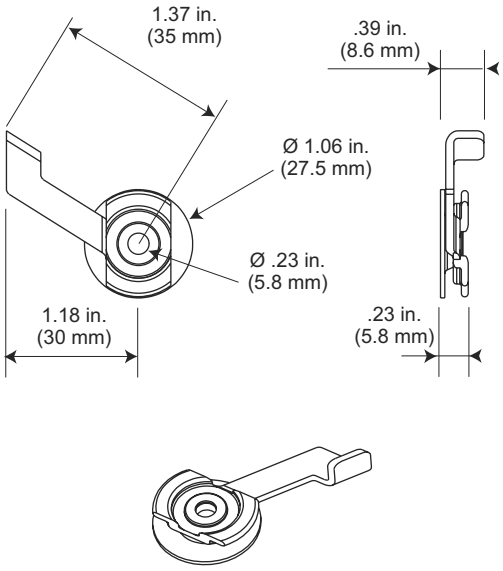


90 Degree Motor Plate -
#9027179




Carriers

Pinch Pleat

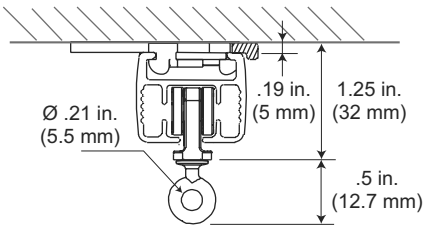


Ripplefold®/Accordia®

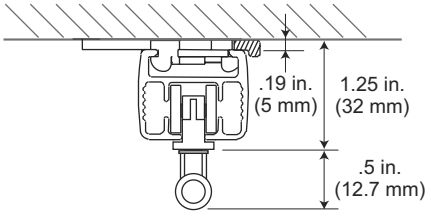


Carriers

Pinch Pleat

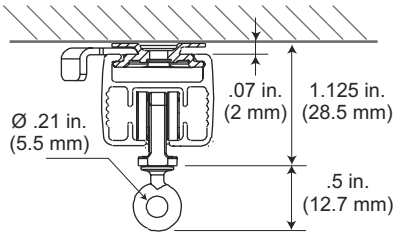


Ripplefold®/Accordia®

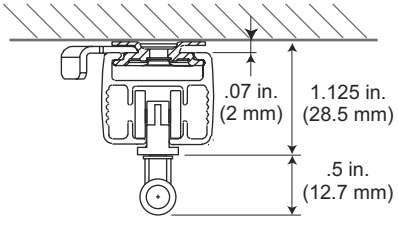

Track Configurations

Ripplefold® One Way Stacked





Required Arms (1)



One Way Overlap Arm Kit
#1782320



Required Arms (2)





One Way Butt Arm Kit
#1782319




Adjustable Ripplefold
Arm Kit
#9027045


Bottom-up view of track and drape assembly

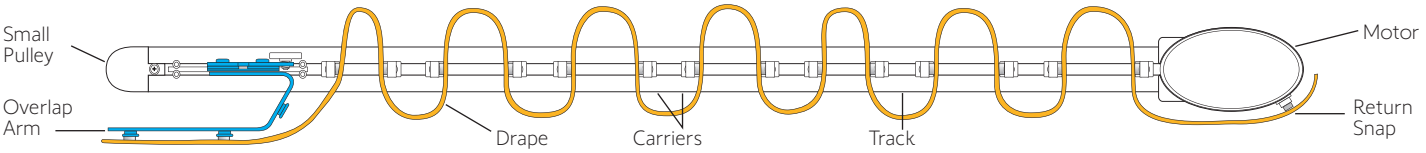


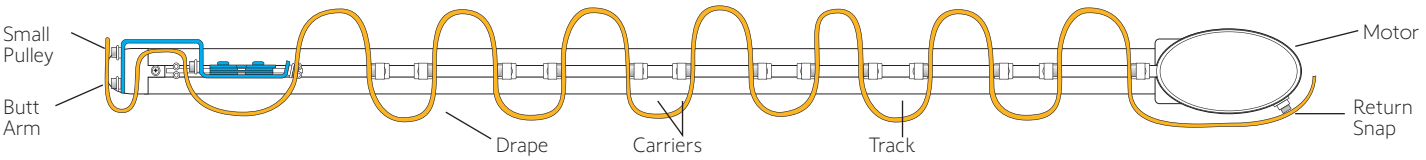

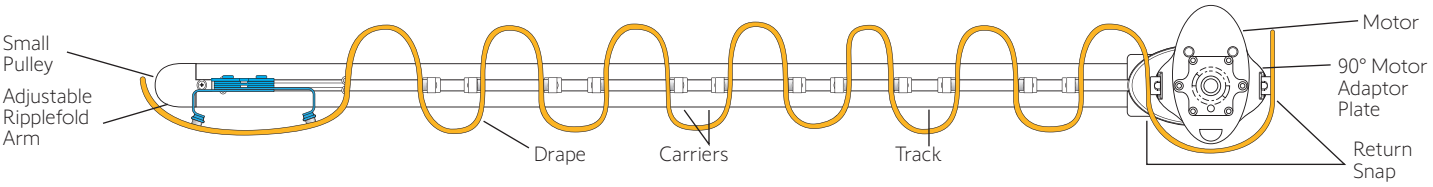


Center Opening



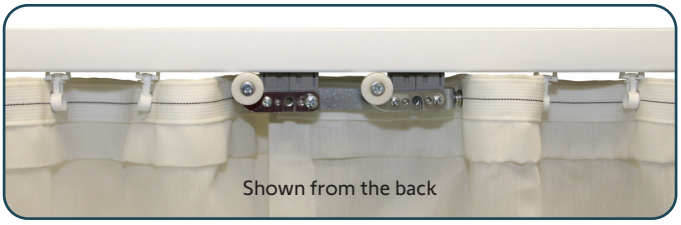


Required Arms (1 each)




Straight Arm Kit - #1782321
&
Overlap Arm Kit - #1782320


Bottom-up view of track and drape assembly

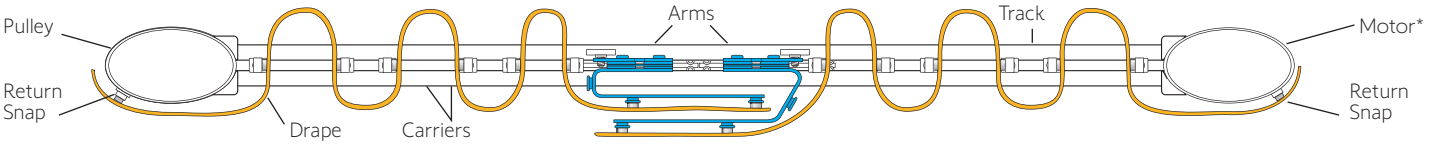

*Motor can be mounted on either side of track.

Center Opening with Butt Master Arms



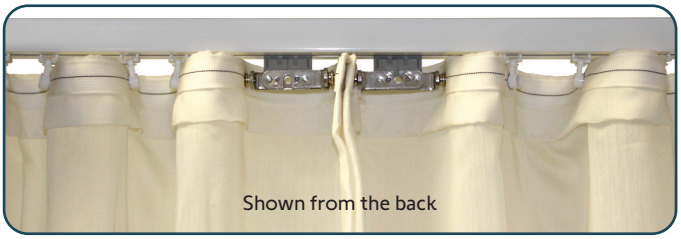


Required Arms (2)



Butt Master Arms - #1780953


Bottom-up view of track and drape assembly

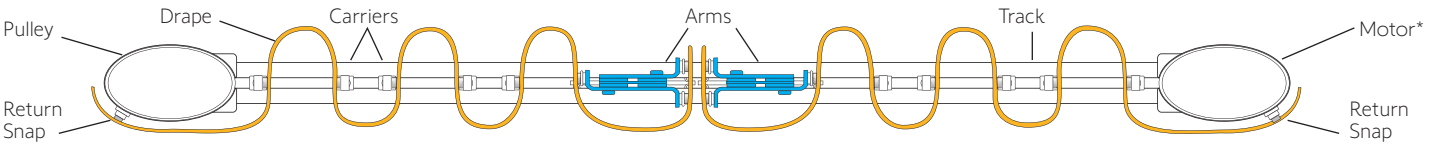

*Motor can be mounted on either side of track.

Track Configurations

Pinch Pleat One Way Stacked






Required Arms (1)


One Way Overlap Arm Kit - #1782320




Bottom-up view of track and drape assembly

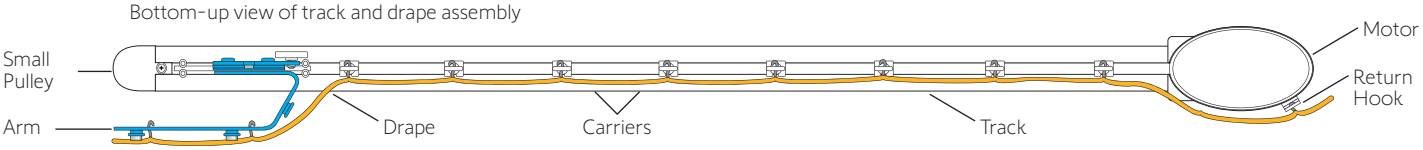


Center Opening



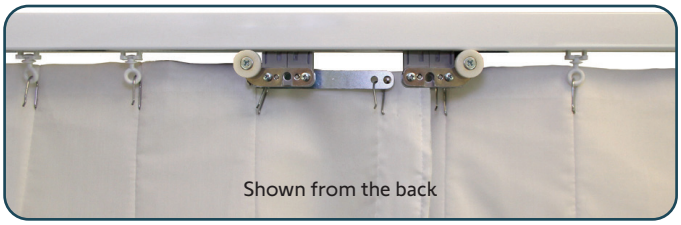


Required Arms (1 each)

Straight Arm Kit - #1782321




Overlap Arm Kit - #1782320

Bottom-up view of track and drape assembly

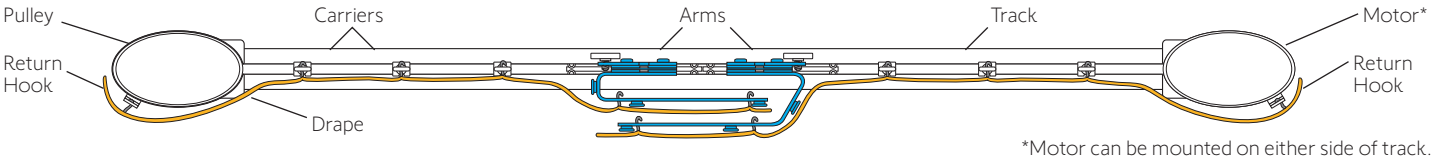

*Motor can be mounted on either side of track.

Pinch Pleat and Ripplefold® Two One Way Butted Tracks (tandem alternative)





Required Arms (2)

One Way Butt Arm Kit - #1782319






Required Arms (2)


Straight Arm Kit - #1782662



Overlap Arm Kit - #1780947







Bottom-up view of track and drape assembly

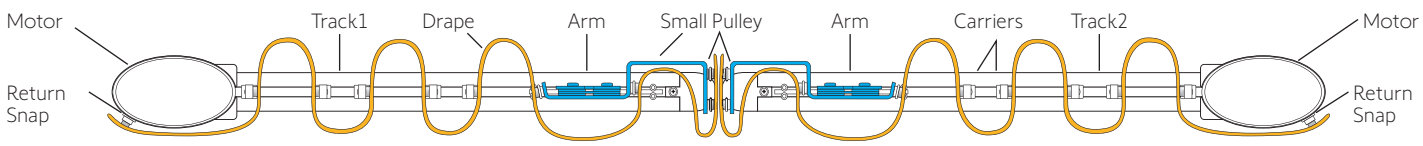

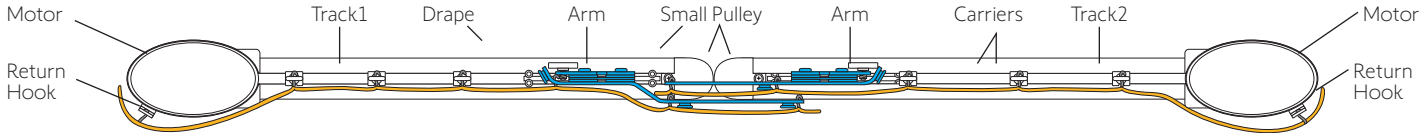




Track Specification Charts


Selection Charts

	Track Type	Glydea® ULTRA 35e & Irismo™ 35 Mini DC			Irismo™ 45 WireFree RTS			Glydea® ULTRA 60e			Glydea® ULTRA 50 WireFree Zigbee		
		Up to 10 ft.	Up to 20 ft.	Up to 32 ft.	Up to 10 ft.	Up to 20 ft.	Up to 32 ft.	Up to 10 ft.	Up to 32 ft.	Up to 36 ft.	Up to 10 ft.	Up to 20 ft.	Up to 32 ft.
A	One Way	77 lbs.			99 lbs.			132 lbs.			110 lbs.		
B	Center Opening	77 lbs.			99 lbs.			132 lbs.			110 lbs.		
C	Asymmetrical	77 lbs.			99 lbs.			132 lbs.			110 lbs.		
D	One Way w/ Bend 	77 lbs.	55 lbs.	44 lbs.	99 lbs.	99 lbs.	77 lbs.	100 lbs.	100 lbs.	77 lbs.	110 lbs.	110 lbs.	99 lbs.
E	Center Opening w/ Bend 	77 lbs.	55 lbs.	44 lbs.	99 lbs.	99 lbs.	77 lbs.	100 lbs.	100 lbs.	77 lbs.	110 lbs.	110 lbs.	99 lbs.
F	One Way w/ 2 Bends 	33 lbs.	22 lbs.	-	77 lbs.	66 lbs.	44 lbs.	77 lbs.	55 lbs.	-	110 lbs.	88 lbs.	66 lbs.
G	Center Opening w/ 2 Bends 	33 lbs.	22 lbs.	-	77 lbs.	66 lbs.	44 lbs.	77 lbs.	55 lbs.	-	110 lbs.	77 lbs.	55 lbs.
H	One Way w/ Continuous Curve 	77 lbs.	33 lbs.	-	77 lbs.	44 lbs.	-	132 lbs.	55 lbs.	-	88 lbs.	55 lbs.	-
I	Center Opening w/ Continuous Curve 	66 lbs.	22 lbs.	-	66 lbs.	44 lbs.	-	113 lbs.	38 lbs.	-	77 lbs.	55 lbs.	-

Dual Motor Tandem Alternative

(2 one way tracks)

	Track Type		Irismo™ 45 WireFree RTS	Glydea® ULTRA 60e			Glydea® 35e ULTRA & Irismo™ 35 Mini DC		
	2 One Way Butted Tracks		Up to 33 ft.	Up to 10 ft.	Up to 32 ft.	Up to 36 ft.	Up to 10 ft.	Up to 20 ft.	Up to 32 ft.
J	Center Opening w/ 2 Straight	(1) Straight	99 lbs.	132 lbs.			77 lbs.		
		(1) Straight	99 lbs.	132 lbs.			77 lbs.		
K	Center Opening w/ 1 Bend 	(1) 90° Bend	NA	100 lbs.		77 lbs.	77 lbs.	55 lbs.	44 lbs.
		(1) Straight	NA	132 lbs.			77 lbs.		
L	Center Opening w/ 2 Bends 	(1) 90° Bend	NA	100 lbs.		77 lbs.	77 lbs.	55 lbs.	44 lbs.
		(1) 90° Bend	NA	100 lbs.		77 lbs.	77 lbs.	55 lbs.	44 lbs.
M	Center Opening w/ 2 Curves	(1) Curve	NA	132 lbs.	55 lbs.	-	77 lbs.	33 lbs.	-
		(1) Curve	NA	132 lbs.	55 lbs.	-	77 lbs.	33 lbs.	-

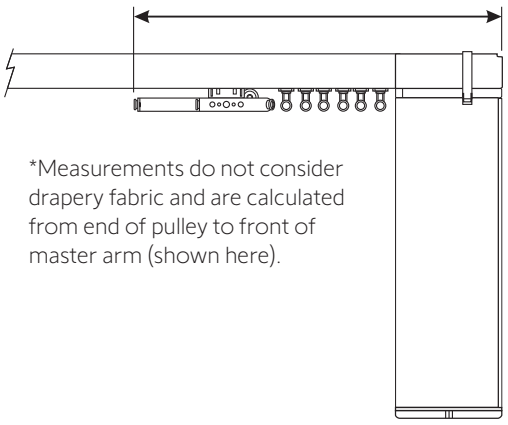

*Measurements do not consider drapery fabric and are calculated from end of pulley to front of master arm (shown here).

Track Specification Charts

Stacking Chart* - for reference only

Track Sizes	Ripplefold® - inches carrier count - ( )											
	One Way 80%		One Way 100%		One Way 120%		Center Opening 80%		Center Opening 100%		Center Opening 120%	
	Butt Arm		Butt Arm		Butt Arm		Butt Arm		Butt Arm		Butt Arm	
Up to 4 ft.	19.5	(20)	21.5	(24)	23.5	(28)	12.25	(20)	13.25	(24)	14.25	(28)
5 ft.	22	(25)	24.5	(30)	27	(35)	13.75	(26)	14.75	(30)	16.25	(36)
6 ft.	24.5	(30)	27.5	(36)	30.5	(42)	14.75	(30)	16.25	(36)	17.75	(42)
7 ft.	27	(35)	30.5	(42)	34	(49)	16.25	(36)	17.75	(42)	19.75	(50)
8 ft.	29.5	(40)	33.5	(48)	37.5	(56)	17.25	(40)	19.25	(48)	21.25	(56)
9 ft.	32	(45)	36.5	(54)	41	(63)	18.75	(46)	20.75	(54)	23.25	(64)
10 ft.	34.5	(50)	39.5	(60)	44.5	(70)	19.75	(50)	22.25	(60)	24.75	(70)
11 ft.	37	(55)	42.5	(66)	48	(77)	21.25	(56)	23.75	(66)	26.75	(78)
12 ft.	39.5	(60)	45.5	(72)	51.5	(84)	22.25	(60)	25.25	(72)	28.25	(84)
13 ft.	42	(65)	48.5	(78)	55	(91)	23.75	(66)	26.75	(78)	30.25	(92)
14 ft.	44.5	(70)	51.5	(84)	58.5	(98)	24.75	(70)	28.25	(84)	31.75	(98)
15 ft.	47	(75)	54.5	(90)	62	(105)	26.25	(76)	29.75	(90)	33.75	(106)
16 ft.	49.5	(80)	57.5	(96)	65.5	(112)	27.25	(80)	31.25	(96)	35.25	(112)
17 ft.	52	(85)	60.5	(102)	69	(119)	28.75	(86)	32.75	(102)	37.25	(120)
18 ft.	54.5	(90)	63.5	(108)	72.5	(126)	29.75	(90)	34.25	(108)	38.75	(126)
19 ft.	57	(95)	66.5	(114)	76	(133)	31.25	(96)	35.75	(114)	40.75	(134)
20 ft.	59.5	(100)	69.5	(120)	79.5	(140)	32.25	(100)	37.25	(120)	42.25	(140)
21 ft.	62	(105)	72.5	(126)	83	(147)	33.75	(106)	38.75	(126)	44.25	(148)
22 ft.	64.5	(110)	75.5	(132)	86.5	(154)	34.75	(110)	40.25	(132)	45.75	(154)
23 ft.	67	(115)	78.5	(138)	90	(161)	36.25	(116)	41.75	(138)	47.75	(162)
24 ft.	69.5	(120)	81.5	(144)	93.5	(168)	37.25	(120)	43.25	(144)	49.25	(168)
25 ft.	72	(125)	84.5	(150)	97	(175)	38.75	(126)	44.75	(150)	51.25	(176)
26 ft.	74.5	(130)	87.5	(156)	100.5	(182)	39.75	(130)	46.25	(156)	52.75	(182)
27 ft.	77	(135)	90.5	(162)	104	(189)	41.25	(136)	47.75	(162)	54.75	(190)
28 ft.	79.5	(140)	93.5	(168)	107.5	(196)	42.25	(140)	49.25	(168)	56.25	(196)
29 ft.	82	(145)	96.5	(174)	111	(203)	43.75	(146)	50.75	(174)	58.25	(204)
30 ft.	84.5	(150)	99.5	(180)	114.5	(210)	44.75	(150)	52.25	(180)	59.75	(210)
31 ft.	87	(155)	102.5	(186)	118	(217)	46.25	(156)	53.75	(186)	61.75	(218)
32 ft.	89.5	(160)	105.5	(192)	121.5	(224)	47.25	(160)	55.25	(192)	63.25	(224)
33 ft.	92	(165)	108.5	(198)	125	(231)	48.75	(166)	56.75	(198)	65.25	(232)
34 ft.	94.5	(170)	111.5	(204)	128.5	(238)	49.75	(170)	58.25	(204)	66.75	(238)
35 ft.	97	(175)	114.5	(210)	132	(245)	51.25	(176)	59.75	(210)	68.75	(246)
36 ft.	99.5	(180)	117.5	(216)	135.5	(252)	52.25	(180)	61.25	(216)	70.25	(252)

Track Specification Charts

Stacking Chart continued* - for reference only

Track Sizes	Ripplefold® - inches carrier count - ( )									Pinch Pleat - inches carrier count - ( )		
	One Way 80%	One Way 100%	One Way 120%	Center Opening 80%		Center Opening 100%		Center Opening 120%		One Way	Center Opening	
	Overlap Arm	Overlap Arm	Overlap Arm	Overlap Arm	Straight Arm	Overlap Arm	Straight Arm	Overlap Arm	Straight Arm	Overlap Arm	Overlap Arm	Straight Arm
Up to 4 ft.	19.25 (20)	21.25 (24)	23.25 (28)	14 (10)	13.75 (10)	15 (12)	14.75 (12)	16.25 (14)	16 (14)	15.25 (12)	11.75 (6)	11.5 (6)
5 ft.	21.75 (25)	24.25 (30)	26.75 (35)	15.5 (13)	15.25 (13)	16.5 (15)	16.25 (15)	18.25 (18)	18 (18)	16.75 (15)	12.75 (8)	12.5 (8)
6 ft.	24.25 (30)	27.25 (36)	30.25 (42)	16.5 (15)	16.25 (15)	18 (18)	17.75 (18)	19.75 (21)	19.5 (21)	18.25 (18)	13.25 (9)	13 (9)
7 ft.	26.75 (35)	30.25 (42)	33.75 (49)	18 (18)	17.75 (18)	19.5 (21)	19.25 (21)	21.75 (25)	21.5 (25)	19.75 (21)	14.25 (11)	14 (11)
8 ft.	29.25 (40)	33.25 (48)	37.25 (56)	19 (20)	18.75 (20)	21 (24)	20.75 (24)	23.25 (28)	23 (28)	21.25 (24)	14.75 (12)	14.5 (12)
9 ft.	31.75 (45)	36.25 (54)	40.75 (63)	20.5 (23)	20.25 (23)	22.5 (26)	22.25 (26)	25.25 (32)	25 (32)	22.75 (26)	15.75 (14)	15.5 (14)
10 ft.	34.25 (50)	39.25 (60)	44.25 (70)	21.5 (25)	21.25 (25)	24 (30)	23.75 (30)	26.75 (35)	26.5 (35)	24.25 (30)	16.25 (15)	16 (15)
11 ft.	36.75 (55)	42.25 (66)	47.75 (77)	23 (28)	22.75 (28)	25.5 (33)	25.25 (33)	28.75 (39)	28.5 (39)	25.75 (33)	17.25 (17)	17 (17)
12 ft.	39.25 (60)	45.25 (72)	51.25 (84)	24 (30)	23.75 (30)	27 (36)	26.75 (36)	30.25 (42)	30 (42)	27.25 (36)	17.75 (18)	17.5 (18)
13 ft.	41.75 (65)	48.25 (78)	54.75 (91)	25.5 (33)	25.25 (33)	28.5 (39)	28.25 (39)	32.25 (46)	32 (46)	28.75 (39)	18.75 (20)	18.5 (20)
14 ft.	44.25 (70)	51.25 (84)	58.25 (98)	26.5 (35)	26.25 (35)	30 (42)	29.75 (42)	33.75 (49)	33.5 (49)	30.25 (42)	19.25 (21)	19 (21)
15 ft.	46.75 (75)	54.25 (90)	61.75 (105)	28 (37)	27.75 (37)	31.5 (45)	31.25 (45)	35.75 (53)	35.5 (53)	31.75 (45)	20.25 (22)	20 (22)
16 ft.	49.25 (80)	57.25 (96)	65.25 (112)	29 (40)	28.75 (40)	33 (48)	32.75 (48)	37.25 (56)	37 (56)	33.25 (48)	20.75 (24)	20.5 (24)
17 ft.	51.75 (85)	60.25 (102)	68.75 (119)	30.5 (43)	30.25 (43)	34.5 (51)	34.25 (51)	39.25 (60)	39 (60)	34.75 (51)	21.75 (26)	21.5 (26)
18 ft.	54.25 (90)	63.25 (108)	72.25 (126)	31.5 (45)	31.25 (45)	36 (54)	35.75 (54)	40.75 (63)	40.5 (63)	36.25 (54)	22.25 (27)	22 (27)
19 ft.	56.75 (95)	66.25 (114)	75.75 (133)	33 (48)	32.75 (48)	37.5 (57)	37.25 (57)	42.75 (67)	42.5 (67)	37.75 (57)	23.25 (29)	23 (29)
20 ft.	59.25 (100)	69.25 (120)	79.24 (140)	34 (50)	33.75 (50)	39 (60)	38.75 (60)	44.25 (70)	44 (70)	39.25 (60)	23.75 (30)	23.5 (30)
21 ft.	61.75 (105)	72.25 (126)	82.75 (147)	35.5 (53)	35.25 (53)	40.5 (63)	40.25 (63)	46.25 (74)	46 (74)	40.75 (63)	24.75 (32)	24.5 (32)
22 ft.	64.25 (110)	75.25 (132)	86.25 (154)	36.5 (55)	36.25 (55)	42 (66)	41.75 (66)	47.75 (77)	47.5 (77)	42.25 (66)	25.25 (33)	25 (33)
23 ft.	66.75 (115)	78.25 (138)	89.75 (161)	38 (58)	37.75 (58)	43.5 (69)	43.25 (69)	49.75 (81)	49.5 (81)	43.75 (69)	26.25 (35)	26 (35)
24 ft.	69.25 (120)	81.25 (144)	93.25 (168)	39 (60)	38.75 (60)	45 (72)	44.75 (72)	51.25 (84)	51 (84)	45.25 (72)	26.75 (36)	26.5 (36)
25 ft.	71.75 (125)	84.25 (150)	96.75 (175)	40.5 (63)	40.25 (63)	46.5 (75)	46.25 (75)	53.25 (88)	53 (88)	46.75 (75)	27.75 (38)	27.5 (38)
26 ft.	74.25 (130)	87.25 (156)	100.25 (182)	41.5 (65)	41.25 (65)	48 (78)	47.75 (78)	54.75 (91)	54.5 (91)	48.25 (78)	28.25 (39)	28 (39)
27 ft.	76.75 (135)	90.25 (162)	134.75 (189)	43 (68)	42.75 (68)	49.5 (81)	49.25 (81)	56.75 (95)	56.5 (95)	49.75 (81)	29.25 (41)	29 (41)
28 ft.	79.25 (140)	93.25 (168)	107.25 (196)	44 (70)	43.75 (70)	51 (84)	50.75 (84)	58.25 (98)	58 (98)	51.25 (84)	29.75 (42)	29.5 (42)
29 ft.	81.75 (145)	96.25 (174)	110.75 (203)	45.5 (73)	45.25 (73)	52.5 (87)	52.25 (87)	60.25 (102)	60 (102)	52.75 (87)	30.75 (44)	30.5 (44)
30 ft.	84.25 (150)	99.25 (180)	114.25 (210)	46.5 (75)	46.25 (75)	54 (90)	53.75 (90)	61.75 (105)	61.5 (105)	54.25 (90)	31.25 (45)	31 (45)
31 ft.	86.75 (155)	102.25 (186)	117.75 (217)	48 (78)	47.75 (78)	55.5 (93)	55.25 (93)	63.75 (109)	63.5 (109)	55.75 (93)	32.25 (47)	32 (47)
32 ft.	89.25 (160)	105.25 (192)	121.25 (224)	49 (80)	48.75 (80)	57 (96)	56.75 (96)	65.25 (112)	65 (112)	57.25 (96)	32.75 (48)	32.5 (48)
33 ft.	91.75 (165)	108.25 (198)	124.75 (231)	50.5 (83)	50.25 (83)	58.5 (99)	58.25 (99)	67.25 (116)	67 (116)	58.75 (99)	33.75 (50)	33.5 (50)
34 ft.	94.25 (170)	111.25 (204)	128.25 (238)	51.5 (85)	51.25 (85)	60 (102)	59.75 (102)	68.75 (118)	68.5 (118)	60.25 (102)	34.25 (51)	34 (51)
35 ft.	96.75 (175)	114.25 (210)	131.75 (245)	53 (86)	52.75 (86)	61.5 (105)	61.25 (105)	70.75 (213)	70.5 (213)	61.75 (105)	35.25 (53)	35 (53)
36 ft.	99.25 (180)	117.25 (216)	135.25 (252)	54 (90)	53.75 (90)	63 (108)	62.75 (108)	72.25 (126)	72 (126)	63.25 (108)	35.75 (54)	35.5 (54)

Drapery Fabricated Track Options*

*Fabricated tracks are available upon request. For more information, please contact Somfy sales.

Available Carrier Arms

Carrier arms are included with fabricated motorized drapery tracks per the opening type.

One Way Opening

Overlap Arm - For use with one way opening Pinch Pleat, one way Ripplefold®, and Accordia® draperies.
Qty 1 per drapery track.



One Way Overlap Arm Kit
1782320

Center Opening

Overlap Arm - For use with center opening Pinch Pleat, Ripplefold®, and Accordia® draperies.
Qty 1 Overlap Arm per drapery track.
Qty 1 Straight Arm per drapery track.



Overlap Arm Kit
1782320

Straight Arm Kit
1782321

Center Opening Butt Master

Butt Master Arm - For use with Ripplefold® and Accordia® center opening draperies only.
Qty 2 per drapery track required.



Butt Master Arms
1780953

One Way Opening or Two Motor Tandem


One Way Butt Arm - For use with Ripplefold® one way draperies and 2 motor tandem alternative.
Qty 1 per drapery track required.



One Way Butt Arm Kit
1782319

Two Motor Tandem Alternative

Overlap Arm/Straight Arm - For use with Pinch Pleat and 2 motor tandem alternative.
Qty 1 per drapery track required.



Straight Arm Kit
1782662

Overlap Arm Kit
1780947

Available Carriers

Standard Carriers are included with fabricated motorized drapery tracks.

Pinch Pleat Draperies

Pinch Pleat Carriers:** Somfy includes a quantity of 3 carriers per foot. Additional carriers can be ordered if necessary.



White 1781415
Bronze 1782869
Black 9026932

****See page 24 for carrier counts.**

Pinch Pleat Return Hook
Qty 2 for One Way Draw (included)
Qty 4 for Center Opening (included)



White 1780895
Bronze 1782862
Black 9026928

Ripplefold Silent Runners

Ripplefold Silent Runners 80%
Qty per roll: 250



White
9027592

Ripplefold Silent Runners 100%
Qty per roll: 250



White
9027593

Ripplefold Silent Runners 120%
Qty per roll: 250



White
9027594

Ripple Pendant
Only



1780948

Ripplefold®/Accordia® Draperies

Somfy Standard Ripplefold/Accordia Type Carriers*:** The quantity of carriers needed depends on the desired fullness. Reference the chart below to determine the needed quantity and standard spacing. Each carrier comes complete with pendant. See page 26-27 for carrier counts.

Item# (white)	Item# (bronze)	Item# (black)	Fullness	***Carrier Spacing
1780903	1782872	9026939	80%	2 3/8" / 5 per ft. (included)
1780902	1782871	9026938	100%	2 1/8" / 6 per ft. (included)
1780901	1782870	N/A	120%	1 7/8" / 7 per ft. (included)



Carrier and Pendant

*****NOTE: Quantity per ft. is included with each fabricated track. Fullness must be specified when order is placed.**
Recommended for use with Somfy Ripple Snap Tape (ordered separately), but also adaptable to Kirsch and Graber snap tape.

Ripple Snap Tape:



100 yd. roll: 1782301
Per yd.: 1782542

Return Snap:
Qty 2 for One Way Draw (included)
Qty 4 for Center Opening (included)




White 1780905
Bronze 1782863
Black 9026940

Custom Track Options

Tandem Alternative

Tandem alternative RTS motorized systems utilize two drapery motors and are for draperies that exceed the maximum single motor capacity. Tandem systems are also available with Dry Contact control technologies and require additional accessories.

See pages 24 & 25 for track configurations and specification details

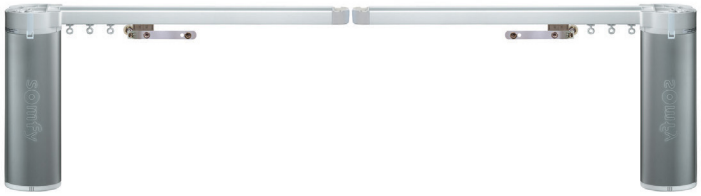


Top Mount

Drapery motors can be installed above the drapery track depending on the project needs. This option provides the ability to conceal the motor in a drop ceiling or under a valence and requires an additional kit.

Top Mount Kit
#1780908



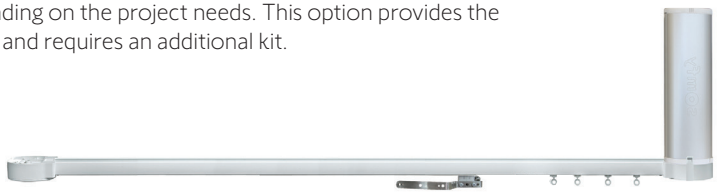

Glystro® Conversion Kit

The Glystro® conversion kit is designed to allow adaptation to allow Somfy's current drapery motors to adapt to previous Glystro® drapery tracks and associated hardware.




#1782106

Bends

Tracks with bends are ideal for bay and corner windows. Track bends are available at a fixed radius of 11.8 in. For more information on how to measure for a bend, please see page 30.


Bent Drapery Track Measurement Form required for all orders.

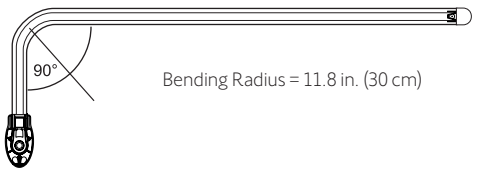

Bends

Custom curves are ideal for bow windows and other special applications. For additional information on how to measure for a curve, and how to make a template, please see *Directions for Creating a Template for Drapery Curves* page 31.

Templates are required for accuracy for all orders.

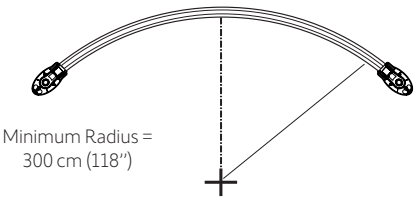


Custom Track Options

Bracket Mounting Recommendations (Top View of Track)

Somfy recommends 1 bracket by each pulley and 1 bracket every 24 in. Also, 1 bracket should be placed on each side of a splice if used.


Center Opening

Glydea® ULTRA 35 & 60e
Irismo™ 35 & 45 RTS

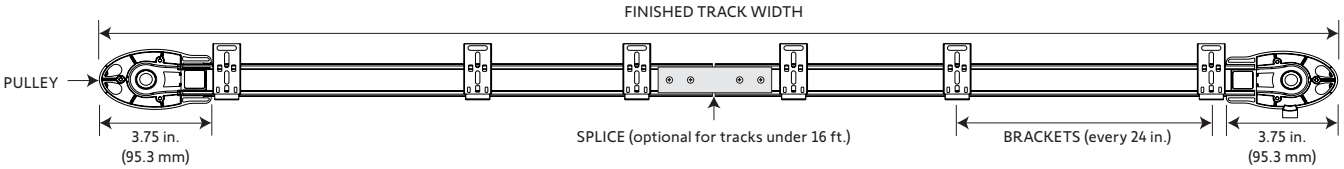


One Way

Glydea® ULTRA 35 & 60e
Irismo™ 35 & 45 RTS

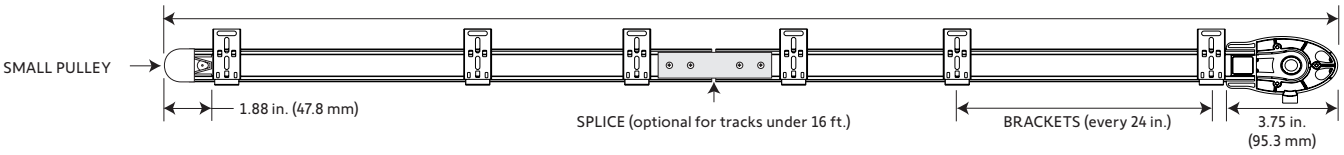


Center Opening

Glydea® ULTRA 50 WireFree Zigbee

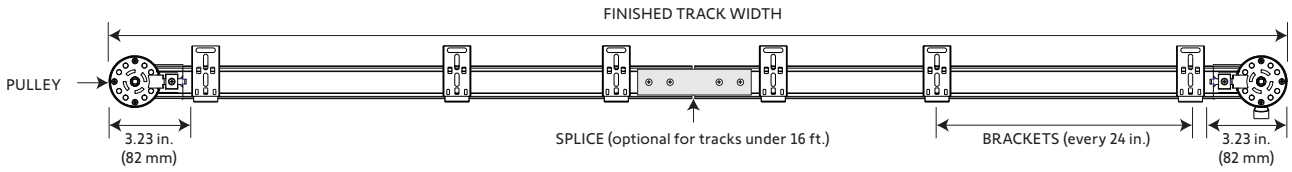

One Way

Glydea® ULTRA 50 WireFree Zigbee

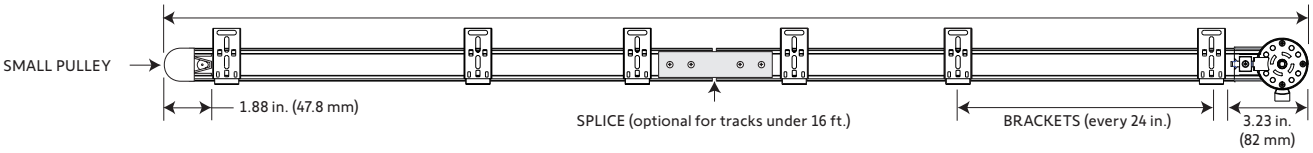

somfy®

DRAPERY ORDER FORM & RESOURCES

Date of Order: _____ Account # _____

P/O #: _____ Sidemark: _____ Special Shipping Directions: _____

SHIPPING

Sold To:

Business Name: _____

Address: _____

City: _____ State: ___ Zip: _____

Phone: _____ Fax #: _____

Email: _____

Ordered By: _____

Signature: _____

Ship To:

Business Name: _____

Address: _____

City: _____ State: ___ Zip: _____

Contact Name: _____

Phone: _____ Fax #: _____

Email: _____

ORDER DETAIL: Please see next page for glossary and definition of terms.

Item #	Room	QTY.	❶ Motor Part#	❷ Width (in.)	❸ Tandem	❹ Motor Side	❺ Track Type*	❻ Track Color	❼ Stack (L/R/S)	❽ If Bent**: # of bends	❾ Carrier Type	❿ Bracket		⓫ Butt Master	⓬ Splice
												Part #	QTY.		
ex.	Living Room	1	1246116	144	Y/N	L	F	WHT/ BRZ	S	2	RF80	1780907	7	NO	X
1															
2															
3															
4															
5															
6															

** For curved tracks, Somfy requires a template. Please see Directions for Creating a Template for Drapery Curves.*

*** For bent tracks, Somfy does not require a template. Please include the Bent Drapery Tracks Measurement Form for exact measurements per angle and return.*

NOTE: Somfy includes a center splice every 16' of track. Please indicate in the "SPECIAL INSTRUCTIONS" section if your requirements differ from Somfy's standard.

CONTROLS: In the space provided below, please list the part number(s) for the control(s) you desire.

Given the nature of custom motorization products, control options and compatibility vary dramatically. If you would like further assistance with control options, simply note it in the field below, and one of our customer service specialists will contact you upon the submission of your order.

SPECIAL INSTRUCTIONS

Payment terms of your account will apply. All engraved wall plates are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail Ordering_us@somfy.com

(Continued on next page)

1 Motor

Motor	Part Number
Glydea® ULTRA 50 WireFree Zigbee	1246594
Glydea® ULTRA 35 Motor RTS with 10' Plug	1246116
Glydea® ULTRA 35 Motor DCT with 10' Plug	1246115
Glydea® ULTRA 60 Motor RTS with 10' Plug	1246118
Glydea® ULTRA 60 Motor DCT with 10' Plug	1246117
Glydea® ULTRA 35 Wired Motor with 10' Plug	1003153
Glydea® ULTRA 60 Wired Motor with 10' Plug	1003160
Irismo™ 35 (Mini DC) RTS	1003004
Irismo™ 35 (Mini DC) DCT	1003003
Irismo™ 45 WireFree RTS	1002353

2 Width (Inches)

Motorized drapery tracks are custom built according to the specified width. Please note that the finished track width is measured pulley end to pulley end. For bent and curved tracks, please provide the total of all wall measurements. When fabricating your drapery, please add 1.5" to your return.

3 Tandem Y=Yes N=No

Tandem motorized systems utilize two drapery motors. Items needed for tandem systems should be noted in the Special Instructions Section of the order form.





Tandem alternative = 2 one way tracks
Requires Glydea ULTRA DCT or IRISMO 35 DCT motors.

4 Motor Side

L=Left Side R=Right Side
Choose the motor side best suited for your installation.


5 Track Type

A-I See below O=Other
NOTE: Somfy requires a template for all curved tracks. Add an "S" after Track Type for Silent Master Carrier option (e.g., "A-S"). Please see ***Directions for Creating a Template for Drapery Curves*** for necessary information.

A One way	D One way w/Bend	G Center Opening w/2 Bends
		
B Center Opening	**E Center Opening w/Bend**	**H One Way w/Continuous Curve**
		
C Asymetrical	**F One way w/2 Bends**	**I Center Opening w/Continuous Curve**
		

6 Track Color - White, Bronze, or Black

7 Stack

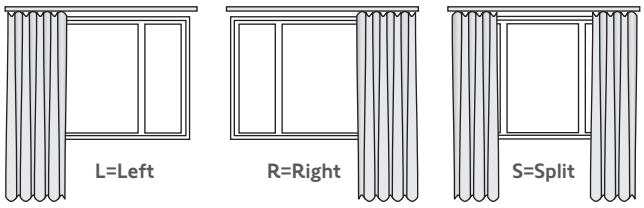

8 If Bent: # of Bends

1=1 Bend, 2=2 Bends, 3=3 Bends, etc.
NOTE: Somfy requires exact angle measurements for all bent tracks. Please submit completed and signed ***Bent Drapery Track Measurement Form*** with all bent track orders.

9 Carrier/Runner Type

1=1 Bend, 2=2 Bends, 3=3 Bends, etc.

SPP=Silent Pinch Pleat
(QTY of 3 per foot included)
PP=Pinch Pleat
(QTY of 3 per foot included)
RF80 = RippleFold® 80% fullness
(QTY of 5 per foot spaced every 2 3/8" included)
RF100 = RippleFold® 100% fullness
(QTY of 6 per foot spaced every 2 1/8" included)
RF120 = RippleFold® 120% fullness
(QTY of 7 per foot spaced every 1 7/8" included)

10 Brackets

NOTE: Brackets are not included and must be ordered separately.

Part Numbers	White	Bronze	Black
One Touch Ceiling Bracket (not recommended for curved tracks)	# 1780907	# 1782865	# 9028544
4.5"-6" Wall Mount Bracket	# 1782054	# 9025621	# 9026930
8.75"-10.25" Double Wall Mount Bracket	# 1782053	# 9025622	N/A
Swivel Ceiling Bracket (strongly recommended for curved tracks)	# 1780906	# 1782864	# 9026929

Somfy recommends one (1) bracket by each pulley and one (1) bracket every 24". Additionally, one (1) bracket should be placed on each side of a splice if used.

11 Butt Master

Y=Yes N=No
Only available for RippleFold® center opening systems. Quantity 2 required; please note item #1780953 in ***Special Instructions Section*** of the order form.

12 Splice


X=Special splice instructions
Somfy includes a center splice every 16ft of track. Please indicate in the Special Instructions Section if your requirements differ from Somfy's standard.

BENT DRAPERY TRACK
MEASUREMENT FORM


1. *Choose the design that best fits your room setup.*
2. *Measure the wall and degrees of all angles as in the examples shown below.*
   - *Make sure to provide the return measurement "R" (distance from wall to front of drapery track as shown in red). The bent track measurement form represents wall measurements; therefore, the "R" dimension MUST BE specified for accurate track fabrication. If "R" dimension IS NOT specified, drapery track will be fabricated according to dimensions (A, B, C, D, etc.) provided.*
   - *Return dimensions will not be considered, and measurements will be calculated from center of each bend.*
   - *When fabricating drapery, please add an additional 1.5 inches of drapery fabric to the anticipated return size.*
3. *Provide all measurements by filling out order form and submitting to Somfy.*

NOTE: The following dimensions are shown from top view of the track and show various wall designs.


STYLE 1 MEASUREMENT

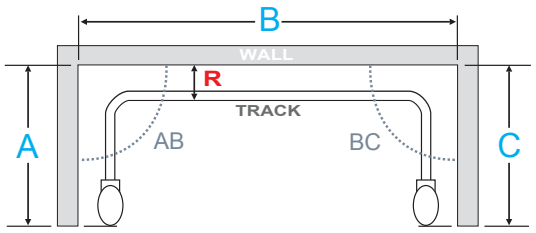


STYLE 2 MEASUREMENT

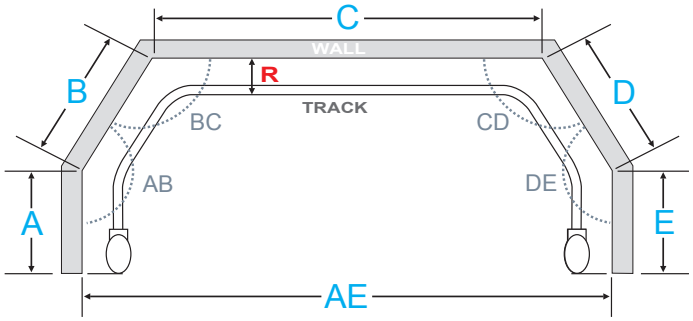


STYLE 3 MEASUREMENT

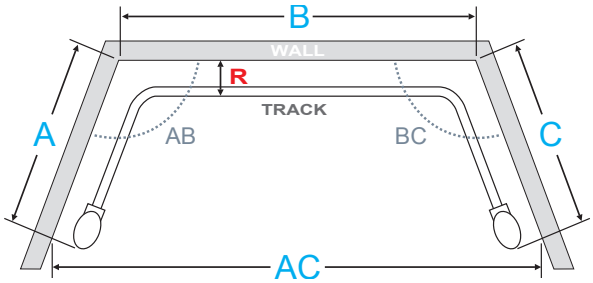

STYLE 4 MEASUREMENT

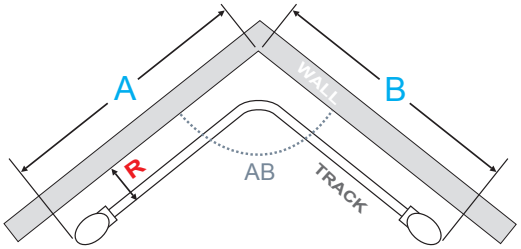

STYLE 5 MEASUREMENT*

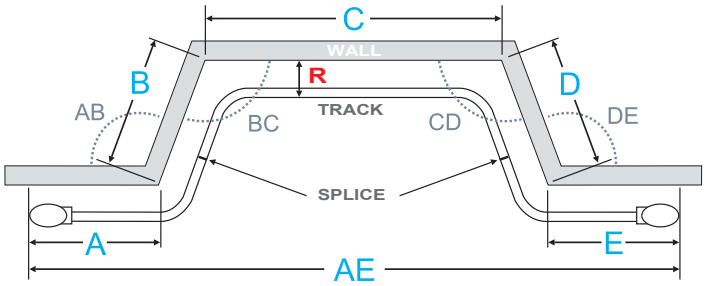

TRACK 1

"R" Dimension _____

Style ____ Degree of

A _____ Bend

B _____ AB _____

C _____ BC _____

D _____ CD _____

E _____ DE _____

AC _____

AE _____

TRACK 2

"R" Dimension _____

Style ____ Degree of

A _____ Bend

B _____ AB _____

C _____ BC _____

D _____ CD _____

E _____ DE _____

AC _____

AE _____

** Splices are required for this style.*

DIRECTIONS FOR CREATING A TEMPLATE FOR DRAPERY CURVES

What you need: • Large piece of construction paper • Tape Measure • Marker • Tape

1. Start with a large piece of construction paper that exceeds the depth and length of the curve.
2. Place the paper on the floor or ceiling depending on the orientation of the curve.
3. Secure the paper with tape.
4. Clearly define the stacking side, motor placement, pocket depth and center line of track with the marker.
5. Mark the radius of the curve.

Please call Somfy for specialty curving applications. Depending on your particular application, your project may require special attention.

6. Please provide as much detail as possible, and all templates must include the following:
   - Indicate "room side"
   - Note how the template was created
     - Template created on the floor facing up (See Figure 1) *preferred method*
     - Template created on the ceiling facing down (See Figure 2)
   - Purchase order number
   - Customer name
   - Company name and account number
7. Note the distance from the wall or the window to the center of the track. **NOTE: be sure to clear all possible obstructions such as handles, sills etc.**
8. Identify the following measurement points:
   - Placement of motor
   - Exact stopping point of track on template
   - Total measurement of curve (See Figure 4-"C")

FIGURE 1: TEMPLATE ON THE FLOOR FACING UP

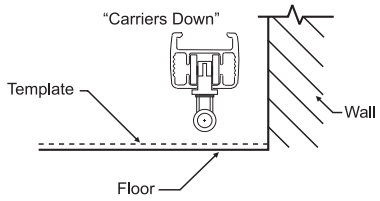


FIGURE 2: TEMPLATE ON CEILING FACING DOWN

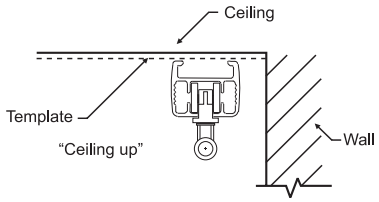


FIGURE 3: CRITICAL DIMENSIONS OF A CURVED TRACK


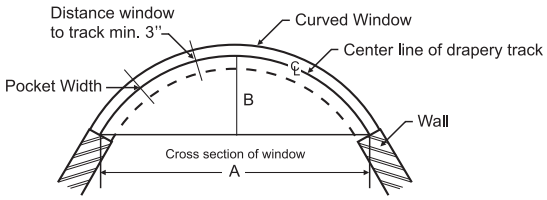


FIGURE 4: TOTAL MEASUREMENT OF CURVE

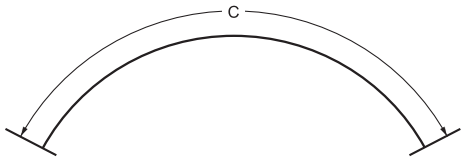

Template Submission Instructions

- Attach a copy of the purchase order to the template.
- Roll up template and place in a mailing tube.

DO NOT FOLD TEMPLATE

NOTE: When mailing, be sure to:

- Get a tracking number
- Include your return address
- Include your purchase order number on the label

Mail to:

Somfy Systems, Inc.
121 Herrod Blvd.
Dayton, NJ 08810
Attn: Drapery Department

Acceptable materials for making templates:

• Kraft Paper • Butcher Paper • Construction Paper

Somfy will not accept template made from the following materials:

• Newspaper • Plastic • Wax Paper • Fabric • Tissue Paper
• Roofing Paper • Existing Arch Shades • Wrapping Paper

NOTE: If the material used to make a template stretches, tears easily, will not lay flat, or will mark the fabric - IT WILL NOT BE USED.

DECOFLEX ZIGBEE ENGRAVING FORM

https://www.somfypro.com/DecoFlex-custom-button

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name:_____

Address:_____

City: _____ State: ___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #: _____

Area: _____

Room: _____

ENGRAVING OPTIONS

Keypad Configuration (choose one)

☐ 2 Channel Surface-mount #1871577
☐ 2 Channel In-wall #1871573
☐ 4 Channel Surface-mount #1871576
☐ 4 Channel In-wall #1871572

Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one)


☐ Text only - *Centered only (Sentence case)*
☐ 1-line ☐ 2-line

☐ Icon only
Centered only


☐ Text and icon
Icon centered, text below (Sentence case)

Buttons (A-D)
9 Characters Maximum (including spaces) **QTY.**

A1									
A2									
B1									
B2									
C1									
C2									
D1									
D2									

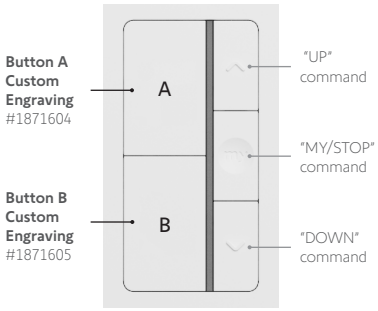

2 Channel



4 Channel

Pictogram Options

Buttons (A-D)
Use numeric code **QTY.**

A		
B		
C		
D		

01	02	03	04	05	06	07	08	09
Roller shades	Horizontal shades	Cellular shades	Layered shades	Draperies	Top-down Bottom-up	Awnings	Rolling shutters	Insect screens
10	**11**	**12**	**13**	**14**	**15**	**16**	**17**	
Lamps	Light bulbs	On/Off	Plug	Kitchen	Patio	Living room	Dining room	
18	**19**	**20**	**21**	**22**	**23**	**24**	**25**	
Bedroom	Bathroom	Entryway/ Mud room	Lanai	Sunroom	Bar	Theater	Family room	

Payment terms of your account will apply. All engraved wall plates are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail Ordering_us@somfy.com

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (609) 395-1300
F: (609) 395-1776

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (561) 995-0335
F: (561) 995-7502

California
15301 Barranca Pkwy.
Irvine, CA 92618-2201
T: (949) 727-3510
F: (949) 727-3775

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

Canada
6411 Edwards Blvd.
Mississauga, ON L5T 2P7
T: (905) 564-6446
F: (905) 238-1491

DECOFLEX WIREFREE™ SURFACE 5 CHANNEL BUTTON ENGRAVING FORM

https://www.somfypro.com/DecoFlex-custom-button

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____

Area: _____


Room: _____

ENGRAVING OPTIONS

***F** button by default is labeled STOP on the DecoFlex range of keypads.*
***G** and **H** buttons by default are labeled as follows:*
*- **G** = down icon*
*- **H** = up icon*

	Buttons (A-E) 9 Characters Maximum (including spaces)	QTY.
A		
B		
C		
D		
E		

DecoFlex WireFree™ Surface 5 Channel #1871025

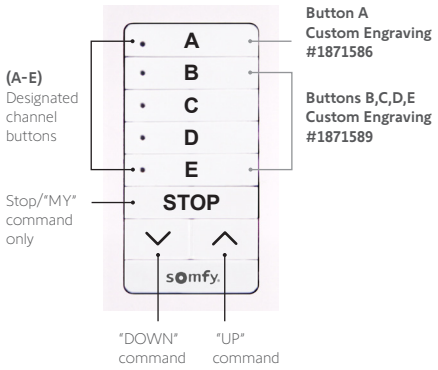

Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one) ☐ ALL LETTERS CAPITALIZED (Default) ☐ First Letters Capitalized ☐ As written in above section

Payment terms of your account will apply. All engraved wall plates are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail Ordering_us@somfy.com

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (609) 395-1300
F: (609) 395-1776

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (561) 995-0335
F: (561) 995-7502

California
15301 Barranca Pkwy.
Irvine, CA 92618-2201
T: (949) 727-3510
F: (949) 727-3775

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

Canada
6411 Edwards Blvd.
Mississauga, ON L5T 2P7
T: (905) 564-6446
F: (905) 238-1491

DECOFLEX KEYPAD BUTTON ENGRAVING FORM

https://www.somfypro.com/DecoFlex-custom-button

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name: _____

Address: _____

City: _____ State: ___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #: _____ Order #: _____

Area: _____

Room: _____

STYLE

Button Color:

☐ White #9018259

☐ Black #9018261

Switch Type:

☐ RTS

☐ Somfy Digital Network (SDN) RS485
Including the SDN Group Keypad. Available in White only.

☐ Dry Contact
Available in White only.

ENGRAVING OPTIONS


Buttons (A-F)
9 Characters Maximum (including spaces) **QTY.**

A										
B										
C										
D										
E										
F										
G										
H										


***F** button by default is labeledSTOP on the DecoFlex Range of keypads.*
***G** and **H** buttons by default are labeled as follows:*
*(**G** = down icon) WHITE - #9018263 BLACK - #9018265*
*(**H** = up icon) WHITE - #9018267 BLACK - #9018269*

These button labels can be substituted with an associated command NAME (UP, DOWN, LOWER, etc.) up to 5 characters.


DecoFlex RTS



DecoFlex SDN (Standalone or Group)



DecoFlex Dry Contact



Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one) ☐ ALL LETTERS CAPITALIZED (Default) ☐ First Letters Capitalized ☐ As written in above section

Payment terms of your account will apply. All engraved wall plates are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail Ordering_us@somfy.com

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (609) 395-1300
F: (609) 395-1776

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (561) 995-0335
F: (561) 995-7502

California
15301 Barranca Pkwy.
Irvine, CA 92618-2201
T: (949) 727-3510
F: (949) 727-3775

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

Canada
6411 Edwards Blvd.
Mississauga, ON L5T 2P7
T: (905) 564-6446
F: (905) 238-1491

SMOOVE® WIRELESS WALL SWITCHES

Custom Engraving Order Form

Available for Pure frames only

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____


Area: _____

Room: _____

SINGLE GANG ENGRAVING OPTIONS

OPTION 1: Smoove® 1 RTS II

Complete section for the desired option

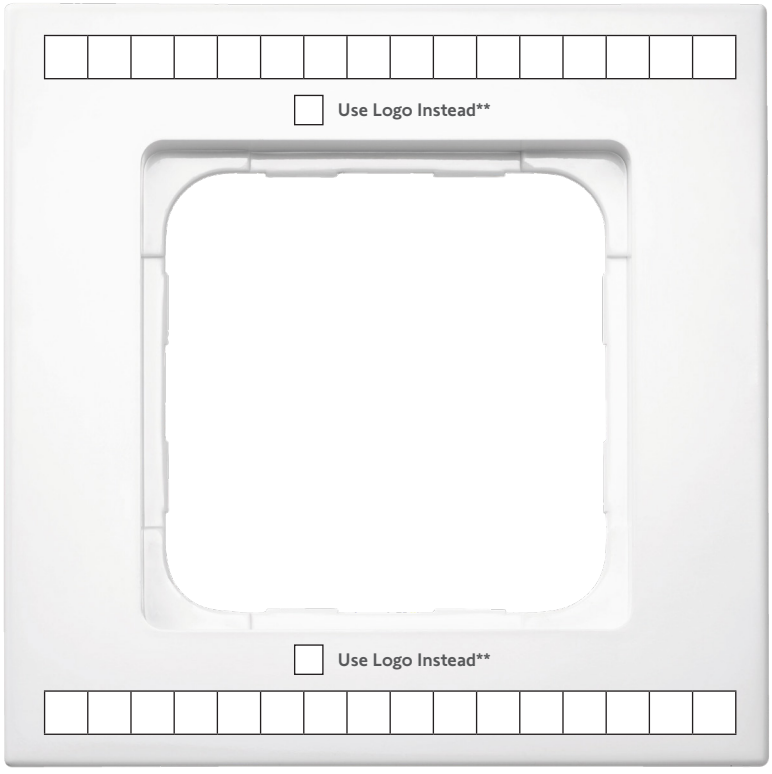

***Logo specs: Maximum dimension: 1.97 in. (5cm) wide x .39 in. (1cm) high*
File format (type): .dxf files only

STYLE OPTIONS

Choose only 1

☐ Smoove Frame, Pure
#9027376 *(Frame Only)*

Quantity: ☐

☐ Smoove® 1 RTS Pure II
#1871361 *(Switch + Frame)*

Quantity: ☐

Example:



Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one)

☐ ALL LETTERS CAPITALIZED (Default) ☐ First Letters Capitalized ☐ As written in above section

SMOOVE® WIRELESS WALL SWITCHES

Custom Engraving Order Form

Available for Pure frames only

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____


Area: _____

Room: _____

SINGLE GANG ENGRAVING OPTIONS

OPTION 2: Smoove® 4 RTS II

Complete section for the desired option

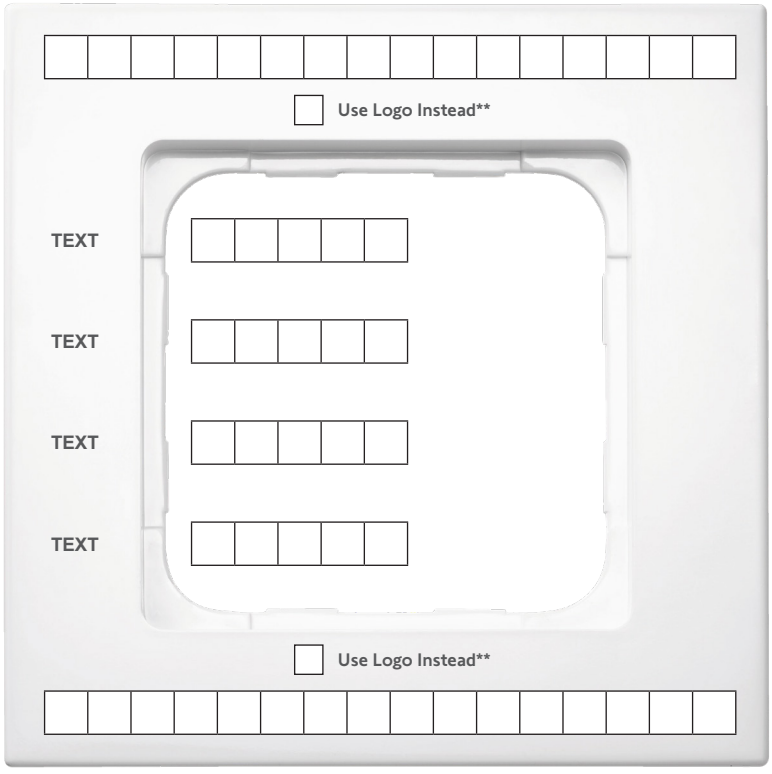

***Logo specs: Maximum dimension: 1.97 in. (5cm) wide x .39 in. (1cm) high*
File format (type): .dxf files only

STYLE OPTIONS

Choose only 1

☐ Smoove Frame, Pure #9027376 *(Frame Only)*

Quantity: ☐

☐ Smoove® 4 RTS Pure II #1871381 *(Switch + Frame)*

Quantity: ☐

Example:



Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one)

☐ ALL LETTERS CAPITALIZED (Default) ☐ First Letters Capitalized ☐ As written in above section

SMOOVE® WIRELESS WALL SWITCHES

Custom Engraving Order Form

Available for Pure frames only

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____


Area: _____

Room: _____

DUAL GANG ENGRAVING OPTIONS

OPTION 3: Dual Gang Vertical

Complete section for the desired option

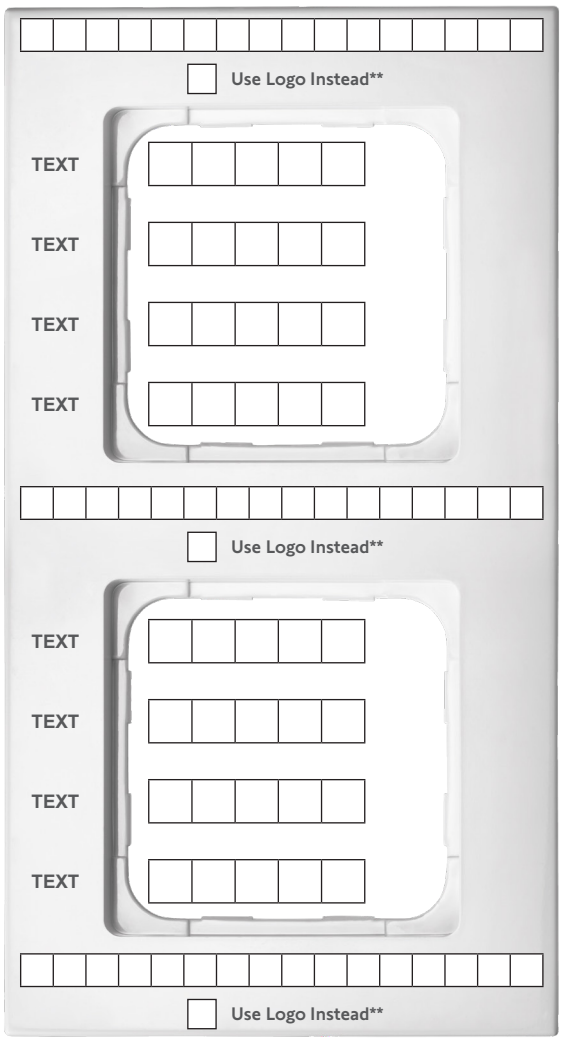

***Logo specs: Maximum dimension: 1.97 in. (5cm) wide x .39 in. (1cm) high*
File format (type): .dxf files only

STYLE OPTIONS

☐ Smoove Double Frame, Pure #9027377 *(Frame Only)*

Quantity: ☐

Examples:





Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one)

☐ ALL LETTERS CAPITALIZED (Default)

☐ First Letters Capitalized

☐ As written in above section

SMOOVE® WIRELESS WALL SWITCHES

Custom Engraving Order Form

Available for Pure frames only

Customer Name: _____ Customer #: _____

SHIPPING

Shipping Information

Ship to: Default Shipping Address ☐ Drop Ship ☐

Name:_____

Address:_____

City: _____ State:___ Zip: _____

Phone: _____

Project Information

Project Name: _____

Installer Name/Company: _____

P/O #:_____ Order #:_____


Area: _____

Room: _____

DUAL GANG ENGRAVING OPTIONS


OPTION 4: Dual Gang Horizontal

Complete section for the desired option

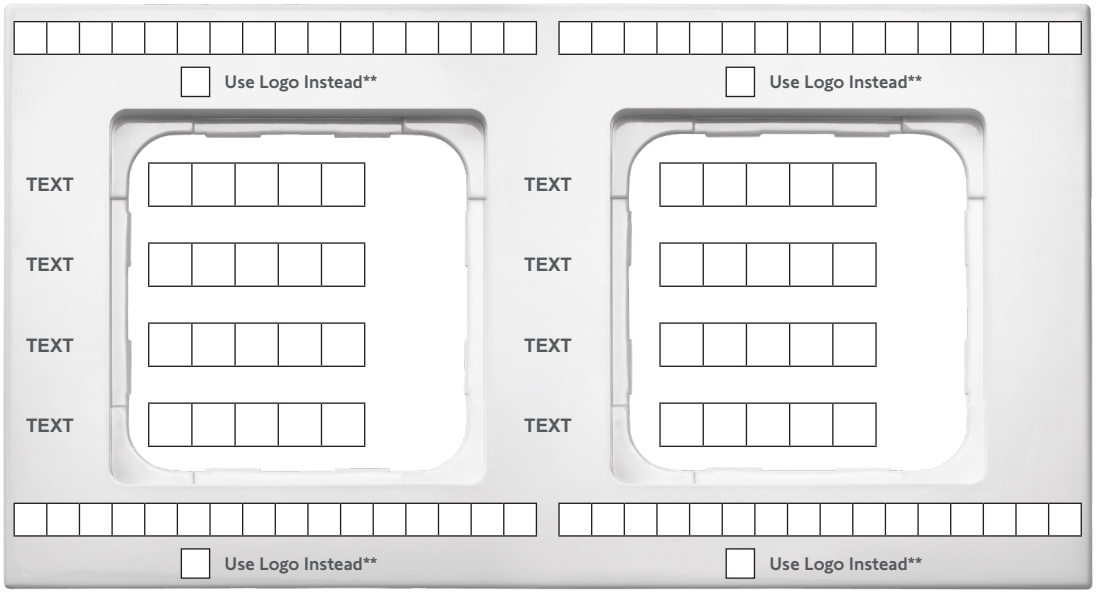

***Logo specs: Maximum dimension: 1.97 in. (5cm) wide x .39 in. (1cm) high. File format (type): .dxf files only*

Examples:





STYLE OPTIONS

☐ Smoove Double Frame, Pure #9027377 *(Frame Only)*

Quantity: ☐

Engraving Options - Default option will be used if nothing is selected.

Character Types: (choose one) ☐ ALL LETTERS CAPITALIZED (Default) ☐ First Letters Capitalized ☐ As written in above section

Payment terms of your account will apply. All engraved frames are custom made and are non-cancellable. Please send form to: Fax # (609) 495-8117 or e-mail Ordering_us@somfy.com

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (609) 395-1300
F: (609) 395-1776

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (561) 995-0335
F: (561) 995-7502

California
15301 Barranca Pkwy.
Irvine, CA 92618-2201
T: (949) 727-3510
F: (949) 727-3775

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

Canada
6411 Edwards Blvd.
Mississauga, ON L5T 2P7
T: (905) 564-6446
F: (905) 238-1491

© Somfy Systems, Inc. • **JUNE 2026**
Zigbee® is a registered trademark of Connectivity Standards Alliance.
Amazon, Alexa, and all related logos are the trademarks of Amazon.com, Inc. or its affiliates.
All brands, products, and trademarks are the property of their respective owners.
Photos : © Somfy Activités SA, Sémaphore, Lukkien, Emmanuelle Firman, Getty Images.

somfy®

Make the move

About Somfy®

For over 50 years, Somfy has been pioneering innovative motorization and automated solutions for window coverings and exterior shading products. With comfort, ease of use, security, and sustainability in mind, our seamless and connected solutions are designed to help people make the move to living spaces impactful for humans and with a reduced impact on nature.

A BRAND OF SOMFY GROUP

Somfy Systems, Inc.
T: (800) 22-SOMFY
www.somfypro.com

New Jersey
121 Herrod Blvd.
Dayton, NJ 08810
T: (609) 395-1300
F: (609) 395-1776

Florida
1200 SW 35th Ave.
Boynton Beach, FL 33426
T: (561) 995-0335
F: (561) 995-7502

California
15301 Barranca Pkwy.
Irvine, CA 92618-2201
T: (949) 727-3510
F: (949) 727-3775

Somfy ULC
T: (800) 66-SOMFY
www.somfypro.ca

Canada
6411 Edwards Blvd.
Mississauga, ON L5T 2P7
T: (905) 564-6446
F: (905) 238-1491