Somfy's WireFree Motor Range

WireFree™

Tubular Motors

Common factors for ST40, ST30 Ultra, ST28 & RU24 motor head (V2)



NEW Motor Head Design

- Recessed programming button
- Smaller diameter head
- Removeable charging cable
- New charger required
- Solar charging capability

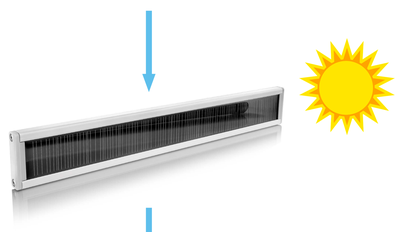

Charger for V2



Ref. #9025166

8" Ext. Cable



Ref. #9021131

94.5" Ext. Cable



Ref. #9021016



V1 MOTOR HEAD Ref.
#1003128
Ref. #1240291
Ref. #1240292

Charger for V1



Ref. #9020672

96" Ext. Cable



Ref. #9020673

KEY SELLING POINTS

- Motor sound improvements across range
- LED low battery indicator
- Soft start & stop
- Adjustable speed control
- Solar charging options (only applies to ST40, ST30 Ultra, ST28 and RU24)
- Electro-static immunity
- Sleep Mode

650 mm (25.6 in.)

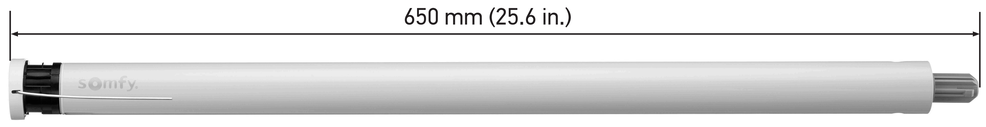

Sonesse® 40 WireFree RTS Li-ion
Quiet operation
Ref #1240485

Torque	3 Nm
Speed	10-28 rpm
Battery capacity	4600 mAh
Recharge	1 /year

650 mm (25.6 in.)

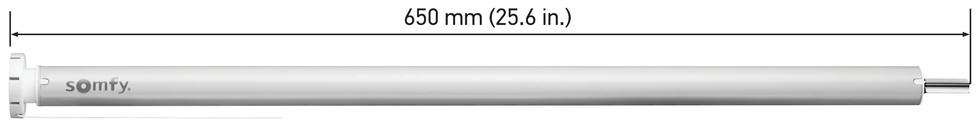

Sonesse® ULTRA 30 WireFree RTS Li-ion
Ultra-quiet operation
Ref #1003310

Torque	2 Nm
Speed	10-28 rpm
Battery capacity	2600 mAh
Recharge	1 /year

601.7 mm (23.69 in.)

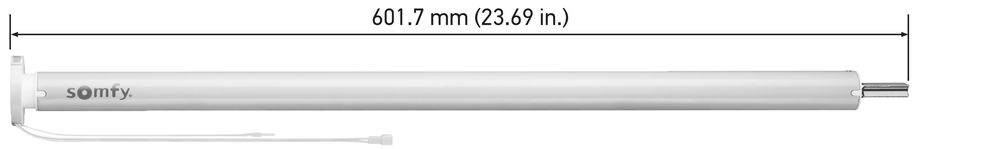

Sonesse® 30 WireFree RTS Li-ion
Improved sound quality
Ref #1003128

Torque	2 Nm
Speed	10-28 rpm
Battery capacity	2600 mAh
Recharge	1 /year

580 mm (22.83 in.)



Roll Up 28 WireFree™ RTS Li-ion
Improved sound quality
Ref #1240291

Torque	1.1 Nm
Speed	10-28 rpm
Battery capacity	2600 mAh
Recharge	1 /year

546 mm (21.5 in.)

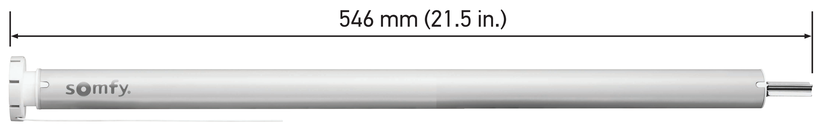

Sonesse® 28 WireFree RTS Li-ion
Improved sound quality
Ref #1003297

Torque	1.1 Nm
Speed	10-28 rpm
Battery capacity	2600 mAh
Recharge	1 /year

478 mm (18.81 in.)



Roll Up 24 WireFree™ RTS Li-ion
Improved sound quality
Ref #1240278

Torque	0.55 Nm
Speed	20-38 rpm
Battery capacity	800 mAh
Recharge	2 /year

355 mm (13.97 in.)



Roll Up 28 WireFree™ RTS External Battery
Improved sound quality
Ref #1240292

Torque	1.1 Nm
Speed	10-28 rpm
*Battery capacity	2600 mAh
*Recharge	1 /year

* When used with New Li-ion battery pack

250 mm (9.8 in.)



Li-ion Rechargeable Battery Pack (2600 mAh)
Ref #9021217
(uses charger for V2 Ref. #9025166)

Shaft Motors

200 mm (9.84 in.)



TL 25 WF
Dual shaft motor, improved sound quality
Ref #1003294

Torque	0.8 Nm
Speed	15-30 rpm
Min. headrail	25mm

104 mm (4.1 in.)



TO/50 WF Central
Through-shaft motor for tilting 50mm horizontal blinds
Ref #1240276

Torque	1.0 Nm
Speed	5-15 rpm
Min. headrail width	50mm
Max. blind size	5 m²

© Copyright Somfy Systems, Inc. 4/2020