

Glydea® Range

MOTORIZATIONS FOR CURTAINS

Expanding horizons



CONTENTS

Glydea™, your guarantee of added value in a demanding market	p. 4
Glydea™, the difference is in the detail	p. 6
Glydea™, everywhere flexibility is the rule	p. 8
Technical specification	p. 10
Ordering and pricing	p. 16
Part list	p. 22
Notes	p. 26



Glydea™ broadens your horizons



Glydea™ curtain motorization solutions meet the requirements of the most prestigious projects.

Motorized curtains are becoming a common feature of top-of-the-range projects such as high-quality hotels, luxury homes, meeting and conference venues.


Glydea™ is discreet, flexible and robust, offering personalized solutions to serve your imagination and broaden your horizons.

Glydea™, your guarantee of added value in a demanding market

With Glydea™ motorization solutions, make your venue stand out in terms of image, usage and functionality.

- Glydea™ improves the image of a venue and makes the job of service personnel easier.
- Glydea™ provides the level of comfort reliability that users and guests expect of venues of this type.
- The automated feature of Glydea™ motorization solutions contributes to energy savings and security (presence simulation).
- Glydea™ extends the lifespan of your curtains, avoiding the damage caused by manual operation.



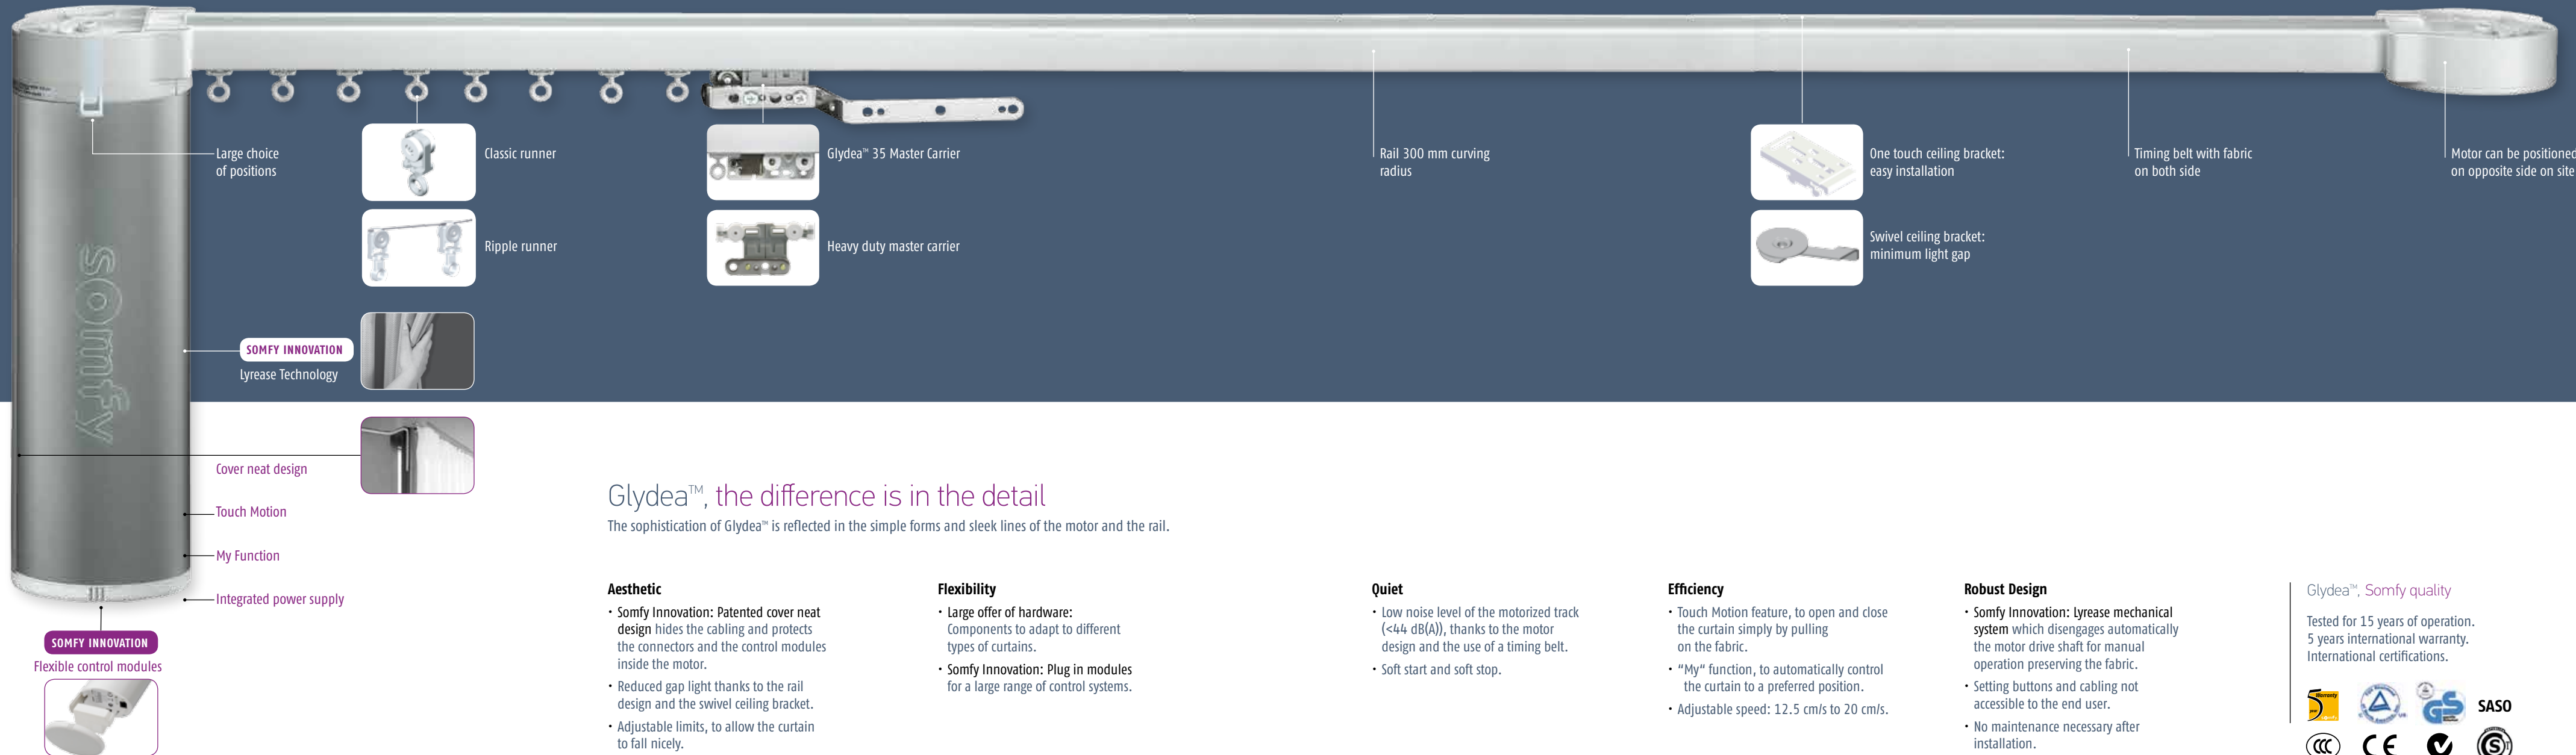

Glydea™, the difference is in the detail

The sophistication of Glydea™ is reflected in the simple forms and sleek lines of the motor and the rail.

Aesthetic

- Somfy Innovation: Patented cover neat design hides the cabling and protects the connectors and the control modules inside the motor.
- Reduced gap light thanks to the rail design and the swivel ceiling bracket.
- Adjustable limits, to allow the curtain to fall nicely.

Flexibility

- Large offer of hardware: Components to adapt to different types of curtains.
- Somfy Innovation: Plug in modules for a large range of control systems.

Quiet

- Low noise level of the motorized track (<44 dB(A)), thanks to the motor design and the use of a timing belt.
- Soft start and soft stop.

Efficiency

- Touch Motion feature, to open and close the curtain simply by pulling on the fabric.
- "My" function, to automatically control the curtain to a preferred position.
- Adjustable speed: 12.5 cm/s to 20 cm/s.

Robust Design

- Somfy Innovation: Lyrease mechanical system which disengages automatically the motor drive shaft for manual operation preserving the fabric.
- Setting buttons and cabling not accessible to the end user.
- No maintenance necessary after installation.

Glydea™, Somfy quality

Tested for 15 years of operation.
5 years international warranty.
International certifications.




Glydea™, everywhere flexibility is the rule



The flexibility of Glydea™ gives all the solutions to answer to the most demanding projects.

- Adaptability
- A large range of solutions, with only one rail, two types of motors, and several control modules.
 - The offers can be personalized thanks to a large range of options.

- Universal
- 
- Rail up to 12 m long.
 - Bending radius from 300 mm.
 - Large choice of rail shapes.
 - Curtain weight up to 60 kg.
 - Large range of accessories to adapt to different types of curtains.

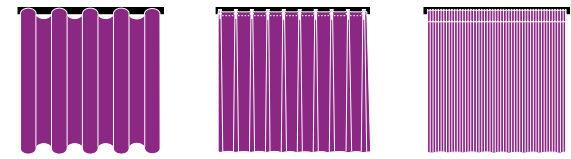

Large offer for all curtain types and shapes

	LATERAL OPENING	CENTRAL OPENING	OTHER SHAPE TYPES
Glydea™ 35	 35 kg / 10 m	 35 kg / 10 m	  
Glydea™ 60e	 60 kg / 12 m	 60 kg / 12 m	

Large choice of control systems



- Standard compatibilities
- Hotel or Home Automation dry contact or AC switching relays.
 - AC switches and control systems.
 - Double or triple push button switches.
 - Somfy or universal infrared transmitters.




- Glydea™ can be equipped with plug in modules to interface with additional control technologies
- RTS receivers,
compatibility with all the Somfy RTS controls.



- Coming Soon
- RS485 interface,
to interface with two-way home automation communication systems.

- Easy installation
- From plug and play to more advanced solutions.
 - Motor can be also hidden in false ceilings.
 - Motor position (left or right) can be changed on site.
 - Automatic or adjustable limit setting.
 - One touch or swivel ceiling bracket.
 - Integrated 24V power supply.

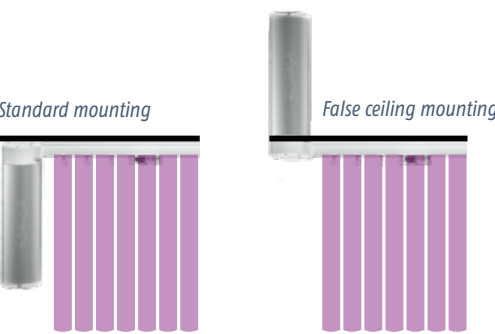

Technical specifications

Features overview


	Glydea™ 35 DCT	Glydea™ 35 WT ⁽¹⁾	Glydea™ 60e DCT	Glydea™ 60e WT ⁽¹⁾
Motor unit main features				
Soft start	•	•	•	•
Soft stop			•	•
Intermediate position			•	
Manual operation	•	•	•	•
Touch motion			•	
Automatic limits on end stop	•	•	•	•
Back release	•	•		•
Adjustable limits			•	
Speed control & adjustment			•	•
Control options				
AC switching		•		•
3 NO dry contacts	•		•	
2 NO dry contacts	•		•	
2 NO dry contact sequencing mode	•		•	
Dry contact individual and group & master control	•		•	
Infrared	•		•	
RS485 digital technology	•		•	
Radio Technology SOMFY	•	•	•	•
Sun control	•		•	
Timer control	•	•	•	•
Installation and settings features				
Setting with buttons on motor unit			•	•
Setting with external 3 no dry contact switch	•	•	•	•
LED indicators			•	•
Motor unit direction change	•	•	•	•
Factory reset	•	•	•	•
Upside down mounting	•	•	•	•
Tracks / Curtain types				
Lateral	•	•	•	•
Central	•	•	•	•
Asymmetric	•	•	•	•
Multiple	•	•	•	•
Classic (Pinch pleat)	•	•	•	•
Ripple drape with overlap arm	•	•	•	•
Ripple drape with butt arm	•	•	•	•

Motorized track main characteristics

	Glydea™ 35 DCT	Glydea™ 35 WT ⁽¹⁾	Glydea™ 60e DCT	Glydea™ 60e WT ⁽¹⁾
Power supply	90 V to 250 V 50/60 HZ			
Average linear speed	20 cm/s		12.5 / 15 / 17 / 20 cm/s	
Power consumption	60 W		120 W	
Power cable type	3-wire cable	4-wire cable	3-wire cable	4-wire cable
Control connector type	RJ12		RJ12	
DCT Control circuit voltage	3.3 VDC	90 V to 250 V AC	3.3 VDC	90 V to 250 V AC
Motorized track noise level ⁽²⁾	50 dB(A)		44 dB(A) ⁽³⁾	
Certifications	c TUV us, CCC, CE, C-Tick, SASO, T-mark			
Track maximum length	12 m			
Maximum number of junctions	2			
Minimum bending radius	300 mm			
Minimum curving radius	3 m			

⁽¹⁾ WT motors can be switched to DCT mode by connecting both direction wires to live.
⁽²⁾ Sound pressure level according to Somfy measurement standard.
⁽³⁾ At 15 cm/s.


Motor dimensions (mm)

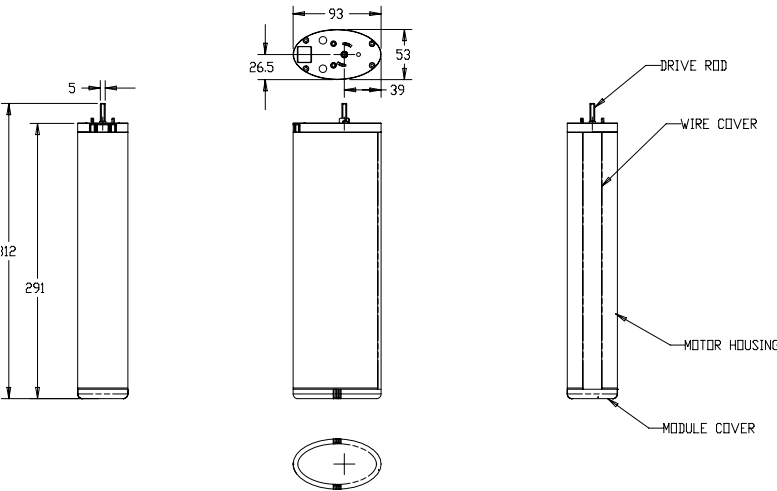

Glydea™ motorized track dimensions


1 RAIL AND MOTOR: GLYDEA™ 35 CLASSIC

Lateral opening (one way) equipped with flexible master carrier

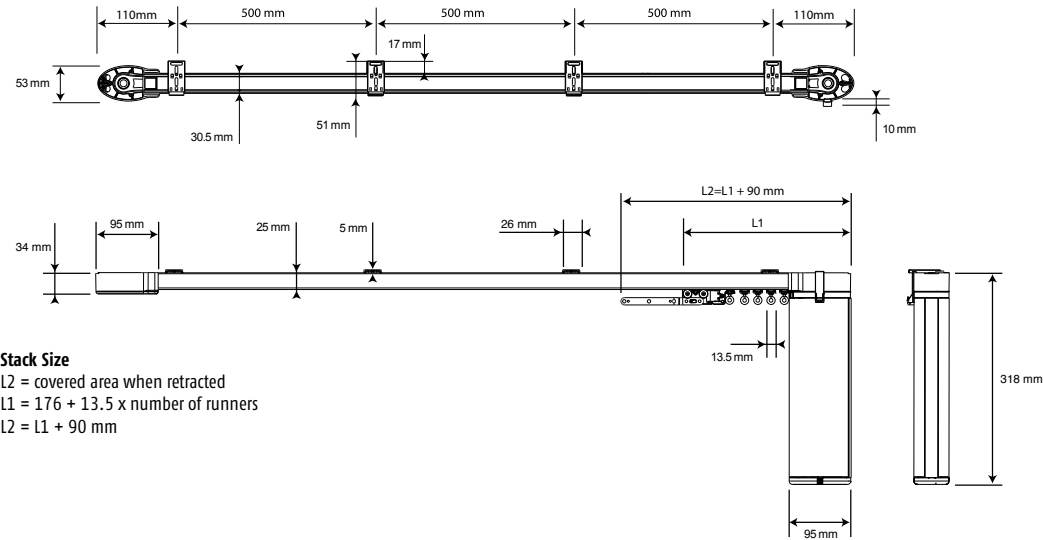


Stack Size
L2 = covered area when retracted
L1 = 176 + 13.5 x number of runners
L2 = L1 + 90 mm

Central opening (two way) equipped with flexible master carrier

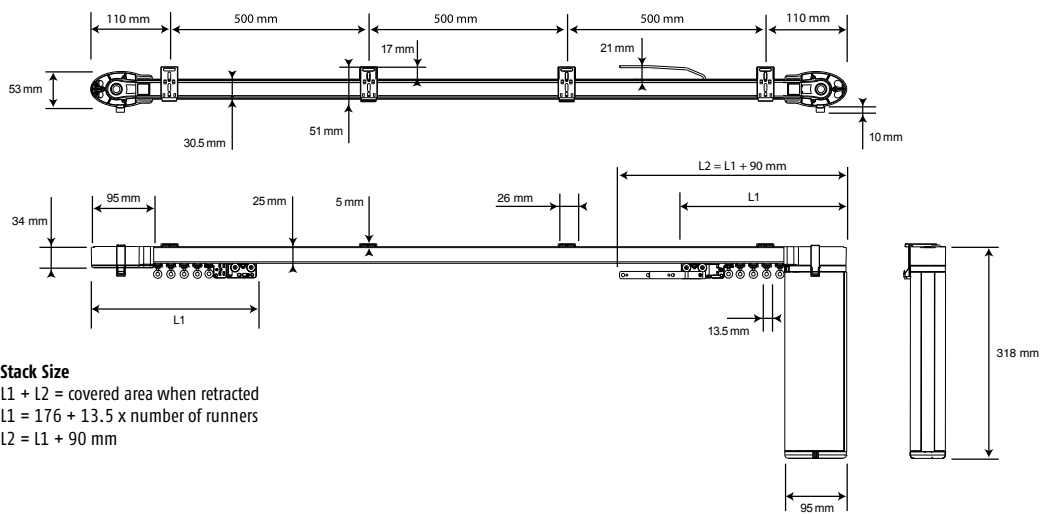


Stack Size
L1 + L2 = covered area when retracted
L1 = 176 + 13.5 x number of runners
L2 = L1 + 90 mm

One touch ceiling bracket

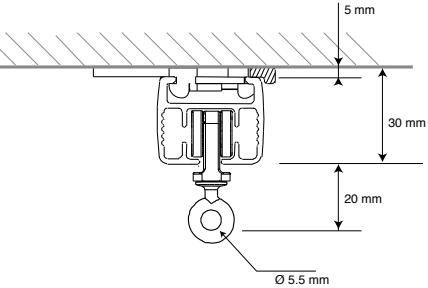


Swivel ceiling bracket

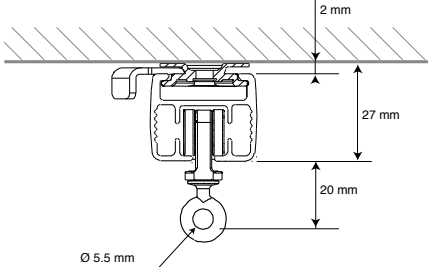


2 RAIL AND MOTOR: GLYDEA™ 60E CLASSIC


Lateral opening (one way) equipped with heavy duty master carrier

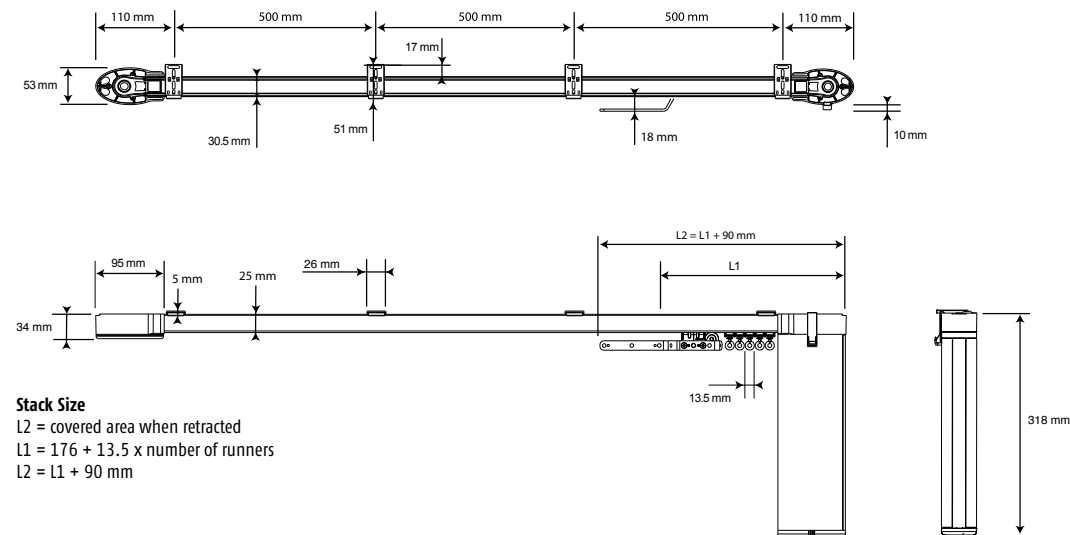


Central opening (two way) equipped with heavy duty master carrier

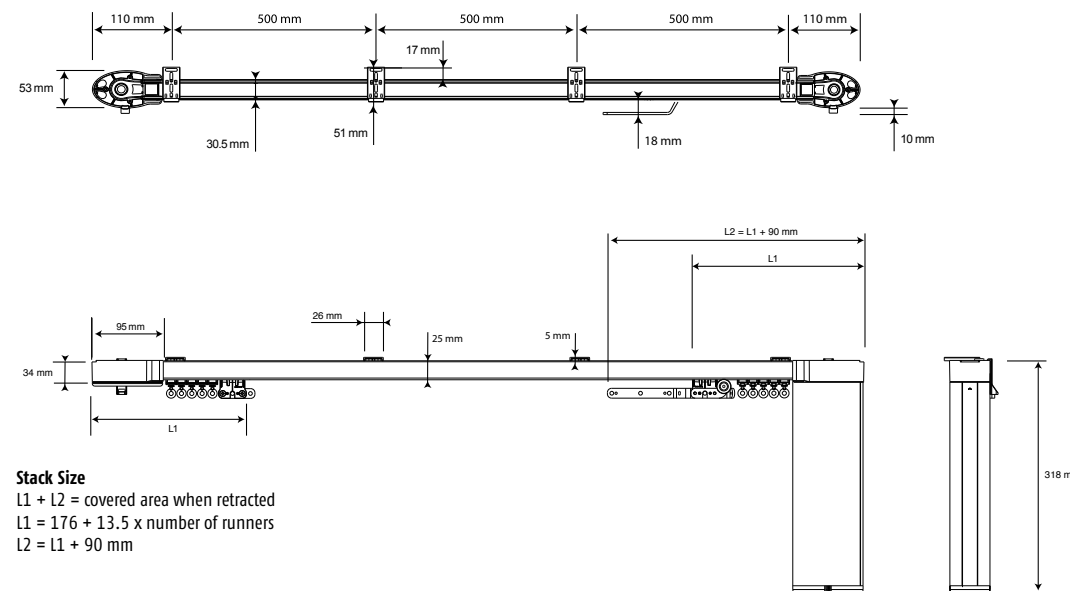

One touch ceiling bracket

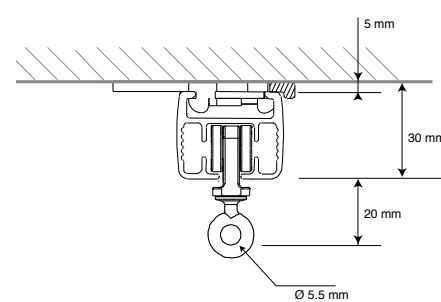


Swivel ceiling bracket

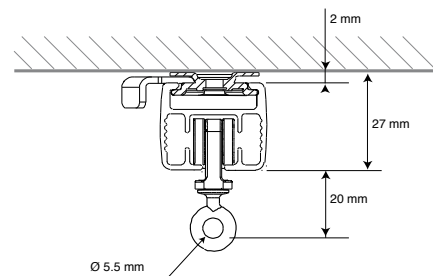


3 RAIL AND MOTOR FOR “RIPPLE” CURTAIN


Lateral opening (one way)

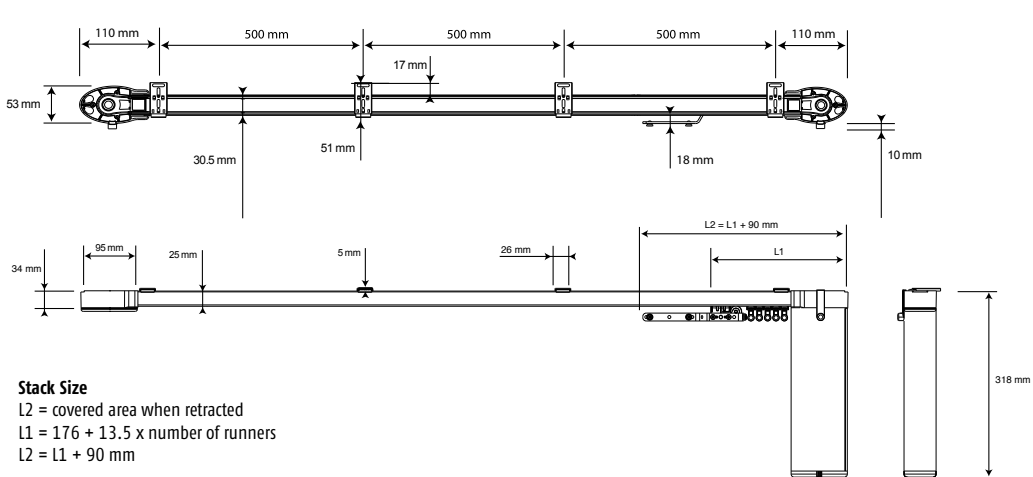

Central opening with buttarms

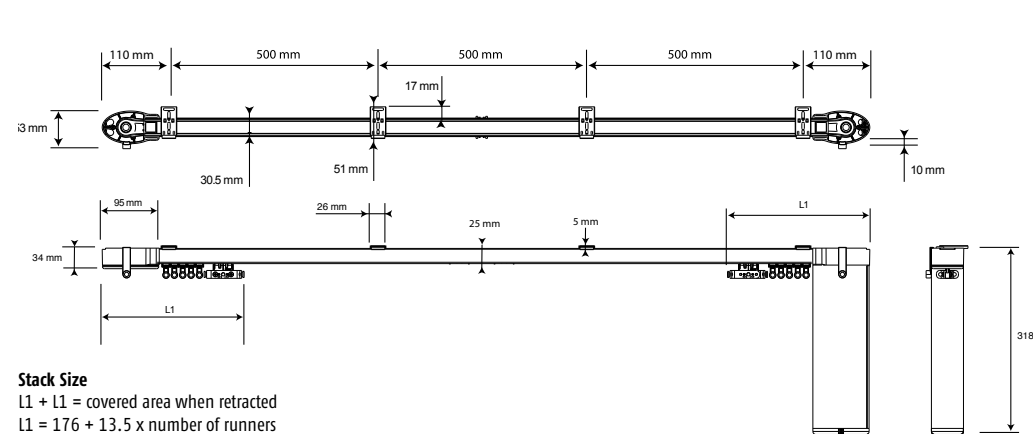


Central opening (two way)

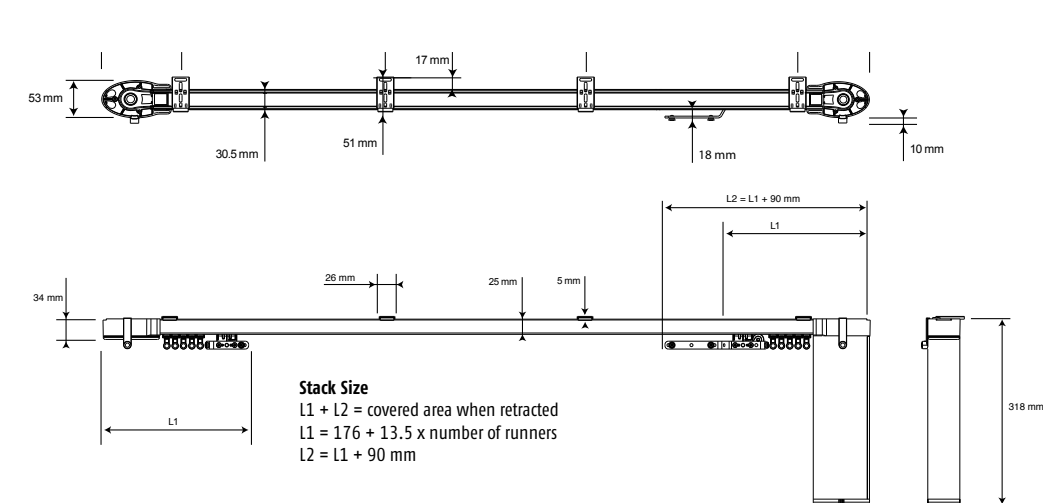


4 BRACKETS TYPES AND DIMENSIONS


One touch ceiling bracket

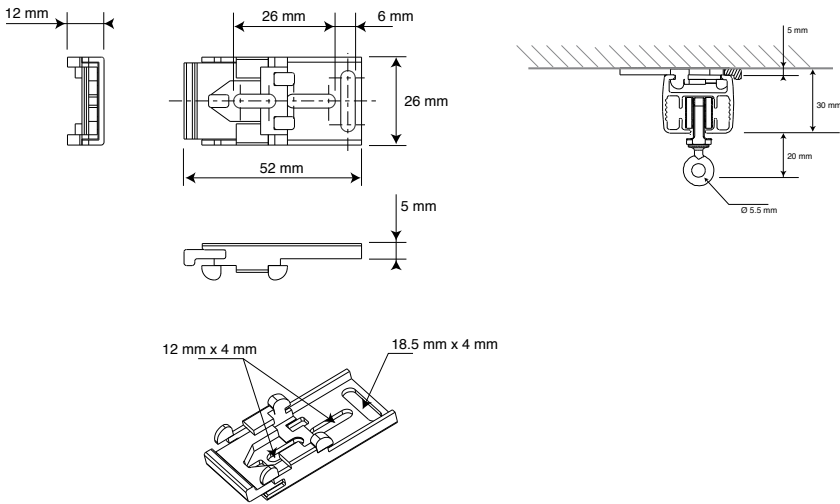


Adjustable wall mount bracket

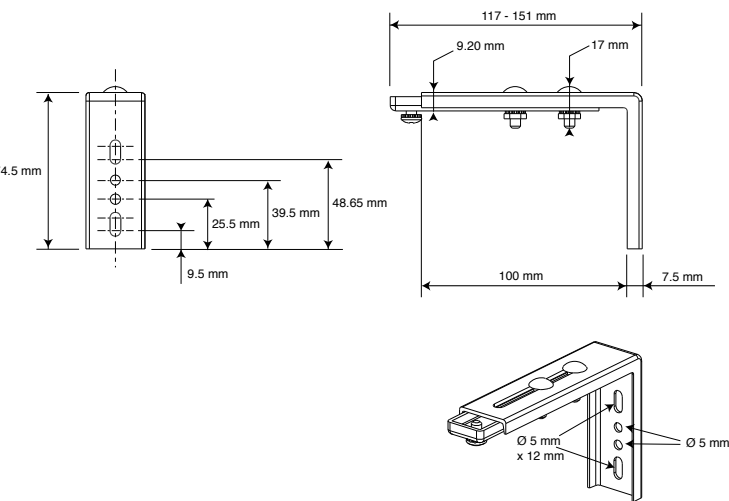

Swivel ceiling bracket

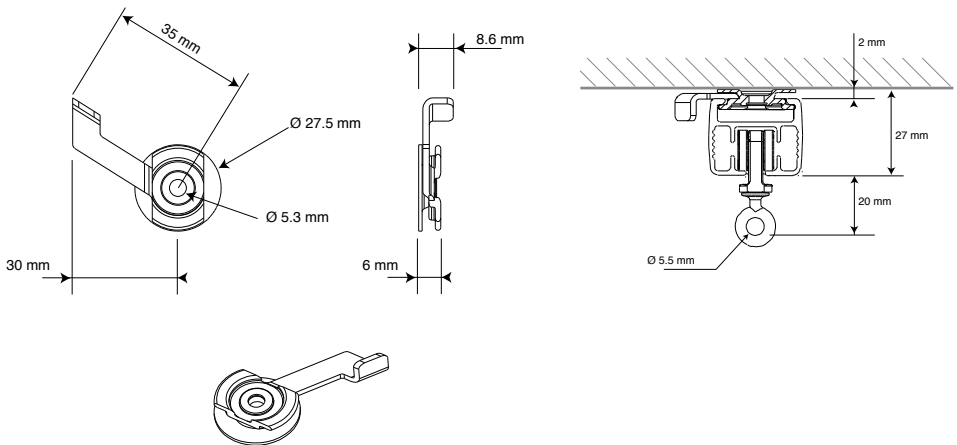


Double adjustable wall mount bracket

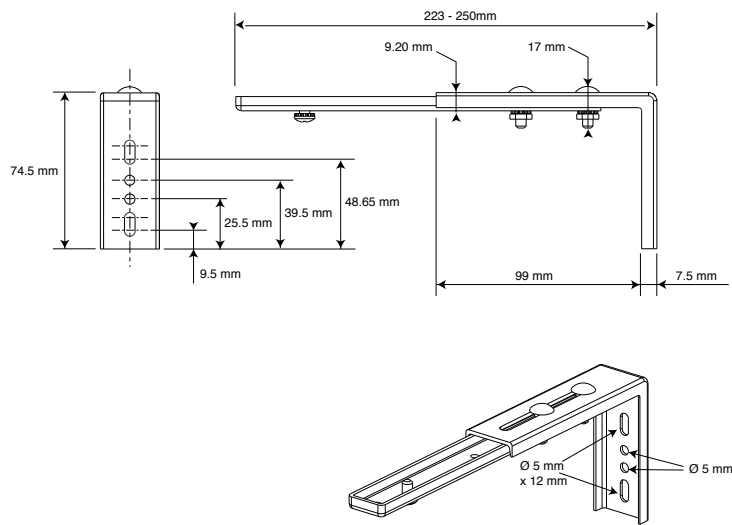


Motor load capacity according to track opening, shape, length

- In the charts below we give the maximum weight of curtain in kg, which has to be motorized by the different Glydea™ versions according to the different track configurations, and the length of the track.
- When calculating the weight of the curtain the fullness ratio of the curtain has to be taken:
Weight of the curtain = fabric weight/m² x Curtain covered area x fullness ratio
- The traversing capacity is given for an installation with no extra friction created by the fabric curtain touching the rail or the track pelmet.

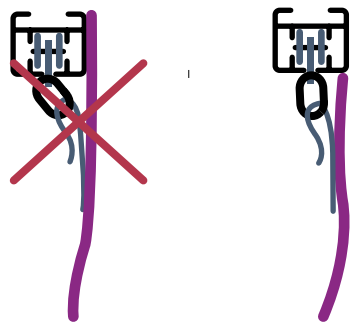

Track bending and curving minimum radius

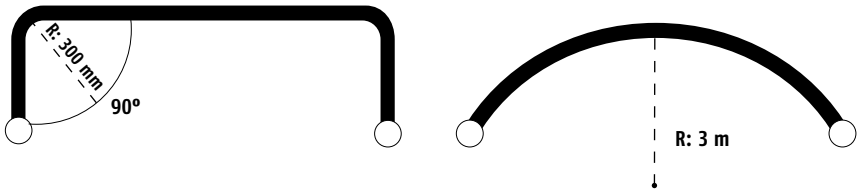

- For bending and curving tracks length and radius limitation please refer to the specific data sheet.
- Maximum weight per runner: 1.5 kg.
- Maximum distance between runners: 10 mm.

Traversing capacity for “Classic” and “Ripplefold” curtain

		Glydea™ 35			Glydea™ 60e		
Track type		3 m	6 m	10 m	6 m	10 m	12 m
Straight	A	35*	35*	35	60	60	55
	B	35*	35*	35	60	60	55
Bent	C	35*	25	20	45	45	35
	D	35*	25	20	45	45	35
	E	15	10		35	25	
	F	15	10		35	25	
	G	35	15		35	8 m	
	H	30	10		30	8 m	

*Capacity limit for Master Carrier GA 35.

Ordering and pricing

Step 1: Select track

1 CLASSIC CURTAIN TRACKS



Lateral opening (one way) equipped with flexible master carrier		
Item	Reference	Description
Runner	1780892	Rotating eye runner GA
Rail	1780899	Rail 16' by 6 GA
	1781379	Rail l=5040 Glydea
Belt	1782084	High perf. 10mm belt 55m roll
Pulley	1780945	Drive pulley GA
	1780897	Pulley GA
Master carrier	1780890	Master carrier GA 35
Arm	1780894	Straight arm GA 35
Rail joint	1780891	Straight rail joint
Hook	1780895	Motor hook GA



Central opening (two way) equipped with flexible master carrier		
Item	Reference	Description
Runner	1780892	Rotating eye runner GA
Rail	1780899	Rail 16' by 6 GA
	1781379	Rail l=5040 Glydea
Belt	1782084	High perf. 10mm belt 55m roll
Pulley	1780945	Drive pulley GA
	1780897	Pulley GA
Master carrier	1780890	Master carrier GA 35
Arm	1780894	Straight arm GA 35
	1780893	Overlap arm GA 35
Rail joint	1780891	Straight rail joint
Hook	1780895	Motor hook GA



Lateral opening (one way) equipped with heavy duty master carrier		
Item	Reference	Description
Runner	1781415	High perf rotating eye runner
Rail	1780899	Rail 16' by 6 GA
	1781379	Rail l=5040 Glydea
Belt	1782084	High perf. 10mm belt 55m roll
Pulley	1780945	Drive pulley GA
	1780897	Pulley GA
Master carrier	1781344	Heavy duty master carrier GA
Arm	1781417	Heavy duty overlap arm kit GA
Rail joint	1780891	Straight rail joint
Hook	1780895	Motor hook GA



Central opening (two way) equipped with heavy duty master carrier		
Item	Reference	Description
Runner	1781415	High perf rotating eye runner
Rail	1780899	Rail 16' by 6 GA
	1781379	Rail l=5040 Glydea
Belt	1782084	High perf. 10mm belt 55m roll
Pulley	1780945	Drive pulley GA
	1780897	Pulley GA
Master carrier	1781344	Heavy duty master carrier GA
Arm	1781417	Heavy duty overlap arm kit GA
	1781416 (option)	Heavy duty straight arm GA (option)
Rail joint	1780891	Straight rail joint
Hook	1780895	Motor hook GA

Components included

- 1 runner per every 10 cm
- 2 hooks for one way track
- 4 hooks for two way track
- Arms as shown
- 1 rail joint for rail over 5140 mm
- 2 rails joints for railover 10140 mm

2 RIPPLE CURTAIN TRACKS



Lateral opening		
Item	Reference	Description
Tape	1782301	Ripple snap tape 4,25 91m roll
Ripple Runner	1780901	Ripple runner 1 7/8" GA
	1780902	Ripple runner 2 1/8" GA
	1780903	Ripple runner 2 3/8" GA
Rail	1780899	Rail 16' by 6 GA
	1781379	Rail l=5040 Glydea
Belt	1782084	High perf. 10mm belt 55m roll
Pulley	1780945	Drive pulley GA
	1780897	Pulley GA
Master carrier	1781344	Heavy duty master carrier GA
Arm	1780947	Ripple overlap arm kit GA
Rail joint	1780891	Straight rail joint
Hook	1780905	Ripple motor hook GA



Central opening		
Item	Reference	Description
Tape	1782301	Ripple snap tape 4,25 91m roll
Ripple Runner	1780901	Ripple runner 1 7/8" GA
	1780902	Ripple runner 2 1/8" GA
	1780903	Ripple runner 2 3/8" GA
Rail	1780899	Rail 16' by 6 GA
	1781379	Rail l=5040 Glydea
Belt	1782084	High perf. 10mm belt 55m roll
Pulley	1780945	Drive pulley GA
	1780897	Pulley GA
Master carrier	1781344	Heavy duty master carrier GA
Arm	1780947	Ripple overlap arm kit GA
	1780946	Ripple straight arm GA
Rail joint	1780891	Straight rail joint
Hook	1780905	Ripple motor hook GA



Central opening with buttarms		
Item	Reference	Description
Tape	1782301	Ripple snap tape 4,25 91m roll
Ripple Runner	1780901	Ripple runner 1 7/8" GA
	1780902	Ripple runner 2 1/8" GA
	1780903	Ripple runner 2 3/8" GA
Rail	1780899	Rail 16' by 6 GA
	1781379	Rail l=5040 Glydea
Belt	1782084	High perf. 10mm belt 55m roll
Pulley	1780945	Drive pulley GA
	1780897	Pulley GA
Master carrier	1781344	Heavy duty master carrier GA
Arm	1780953	Ripple butt arms kit GA
Rail joint	1780891	Straight rail joint
Hook	1780905	Ripple motor hook GA


Components included

- 1 runner per every 48,54 or 60 mm.
- 2 hooks for one way track.
- 4 hooks for two way track.
- Arms as shown.
- 1 rail joint for rail over 5140 mm.
- 2 rails joints for railover 10140 mm.

Step 2: Select motors

Motors		Ref.	Price
	Glydea™ 35 DCT EU 1.5M: Dry contact and IR control, 3 wire 1.5M cable Unit 1	1 001 261	
	Glydea™ 35 WT EU 1.5M: AC switching control, 4 wire 1.5M cable Unit 1	1 001 525	
	Glydea™ 35 RTS 433 EU 1.5M: Dry contact and IR and RTS control, 3 wire 1.5M cable Unit 1	1 001 263	
	Glydea™ 60e DCT EU 1.5M: Dry contact and IR control, 3 wire 1.5M cable Unit 1	1 001 265	
	Glydea™ 60e WT EU 1.5M: AC switching control, 4 wire 1.5M cable Unit 1	1 001 537	
	Glydea™ 60e RTS 433 EU 1.5M: Dry contact and IR and RTS control, 3 wire 1.5M cable Unit 1	1 001 264	

Step 3: select brackets

Swivel ceiling bracket		Adjustable wall bracket	
	To minimize the light gap (max 2mm)		Used with either ceiling bracket
	Minimum quantity necessary:		Minimum quantity necessary:
	2,5/m of track		2,5/m of track
	Steel zinc plated		Steel, white color
	Unit: 1		Unit: 1
	Ref. 1 780 906		Ref. 1 780 909
	For an easy installation		Used with either ceiling bracket
	Minimum quantity necessary:		Minimum quantity necessary:
	2,5/m of track		2,5/m of track
	Steel, white color		Steel, white color
	Unit: 1		Unit: 1
	Ref. 1 780 907		Ref. 1 780 910


Step 4: Select optional hardware

Additional motor hook GA for classic curtain		Additional motor hook for ripple curtain		Additional rotating eye runner for classic curtain		Additional high performance runner	
	Unit: 1		Unit: 1		Unit: 1		Unit: 1
	Ref. 1 780 895		Ref. 1 780 905		Ref. 1 780 892		Ref. 1 781 415
	Price:		Price:		Price:		Price:


Step 5: Select controls

1 GLYDEA™ RTS RADIO CONTROL

Individual control with Telis transmitter or/and wall switch
(Glydea™ DCT motor + RTS 433 receiver)

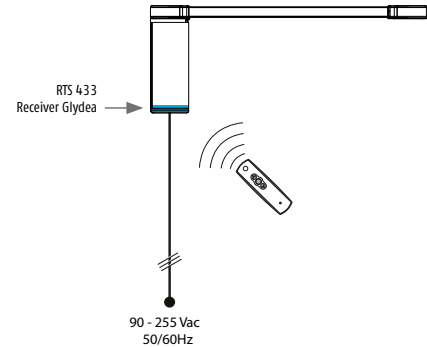


Group and individual control with 4 channels Telis transmitter
(Glydea™ DCT motors + RTS 433 receiver)

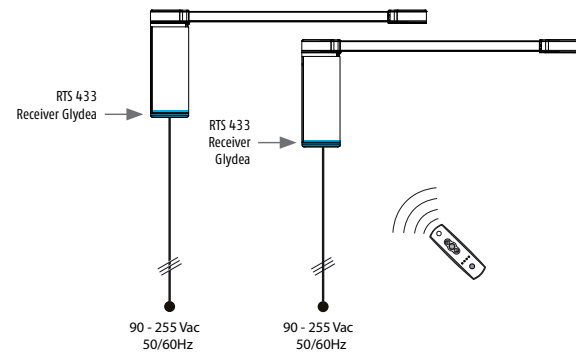

RTS 433 receiver Glydea™	
	Plug-in 433 Mhz RTS receiver
	Compatible with Glydea™ 35 DCT and Glydea™ 60e DCT
	Unit:
	Ref. 1 870172
	Price:

Smoove 1 open/close RTS			
	One channel sensitive wall switch (frames to be ordered separately)		
	Unit: 1		
	Pure Shine	Ref. 1 811 011	Price:
	Black Shine	Ref. 1 811 009	Price:

Wall switch frames			
	Frames to be used with Smoove RTS wall switch		
	Pure	Ref. 9 015 022	Price:
	Silver Lounge	Ref. 9 015 024	Price:
	Silver Mat	Ref. 9 015 025	Price:
	Black	Ref. 9 015 023	Price:
	Light Bamboo	Ref. 9 015 027	Price:
	Amber Bamboo	Ref. 9 015 026	Price:
	Cherry	Ref. 9 015 036	Price:
	Walnut	Ref. 9 015 037	Price:

Telis 1 RTS			
	One channel RTS transmitter		
	Unit: 1		
	Pure	Ref. 1 810 630	Price:
	Patio	Ref. 1 810 642	Price:
	Silver	Ref. 1 810 637	Price:
	Lounge	Ref. 1 810 649	Price:


Telis 4 RTS			
	Five channels RTS transmitter		
	Unit: 1		
	Pure	Ref. 1 810 631	Price:
	Patio	Ref. 1 810 644	Price:
	Silver	Ref. 1 810 638	Price:
	Lounge	Ref. 1 810 651	Price:

Telis 6 Chronis RTS			
	Six channels RTS transmitter		
	Unit: 1		
	Pure Shine	Ref. 1 805 209	Price:
	Black Shine	Ref. 1 805 210	Price:


ThermoSunis indoor wireFree™ RTS	
	Indoor battery powered RTS sun sensor
	Unit: 1
	Ref. 9013708
	Price:

2 GLYDEA™ DCT MOTORS WIRED AND INFRARED CONTROL


Infrared individual control with IR3 sensor and IR1



Infrared group control with IR3 sensor and IR8

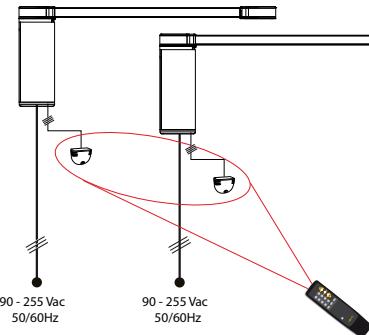

DCT individual and group control with centralis IB using Glydea™ DCT splitter

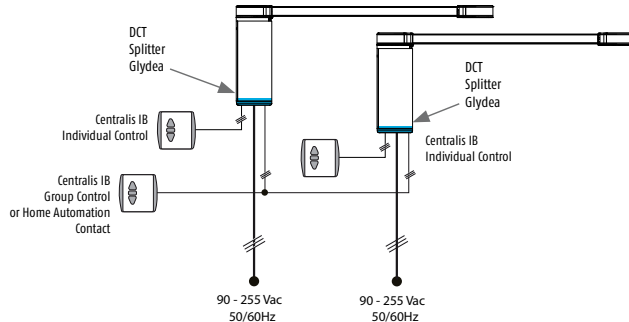

IR1	
	Infrared One Channel transmitter
Unit:	1
Packaging:	10
Ref.	1 870 133
Price:	

IR8	
	Infrared Eight Channels transmitter
Unit:	1
Packaging:	10
Ref.	1 870 132
Price:	

IR3 ILT sensor	
	Infrared sensor, compatible with Somfy IR1 & IR8, and all Universal IR transmitter
To be used with RJ9/RJ12 adapter Ref. 9 014 068	
Unit:	1
Packaging:	10
Ref.	9 154 205
Price:	

DCT splitter Glydea	
	Unit equipped with 2 RJ12, screw terminal blocks and diodes. Used for individual and master control with 2 Normally Open dry contact switches or IR
Unit:	1
Packaging:	12
Ref.	9 015 442
Price:	




Centralis IB	
	2 Normally Open Contact + Stop in parallel, to be used for individual, group DCT control
Unit:	1
Packaging:	
Ref.	1 810 138
Price:	

Cable DCT 2.5m	
	Cable equipped with a RJ 12 connector
Unit:	1
Packaging:	10
Ref.	9 015 443
Price:	


• Glydea™ DCT motors are compatible with Home Automation Dry Contact System and Universal Infrared transmitter.

3 GLYDEA™ WT MOTOR WIRED CONTROL

Individual or group control with AC switch

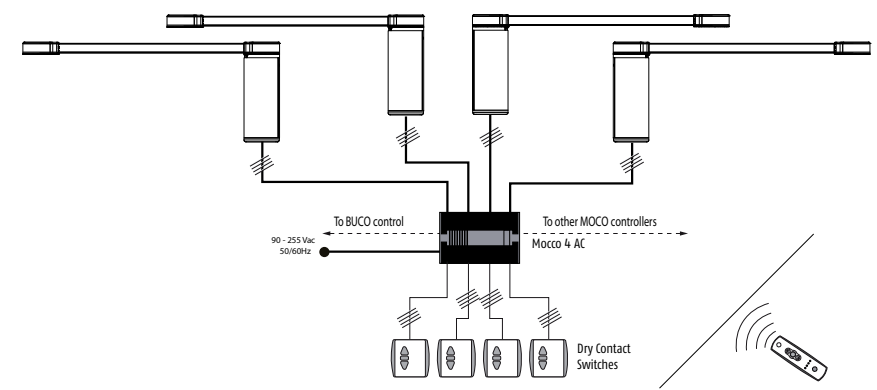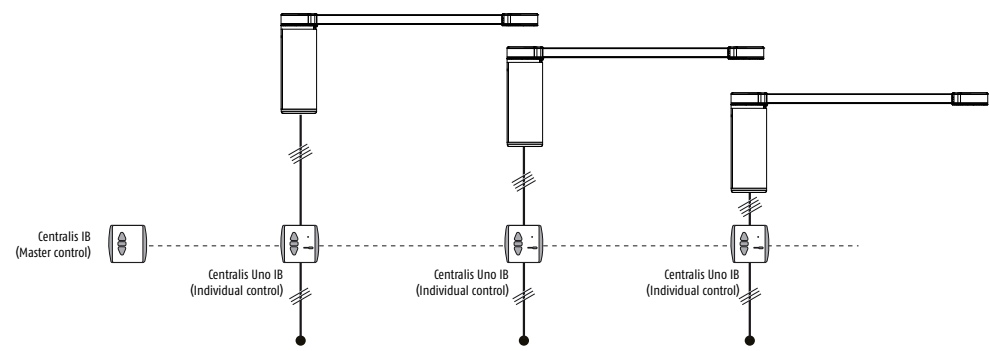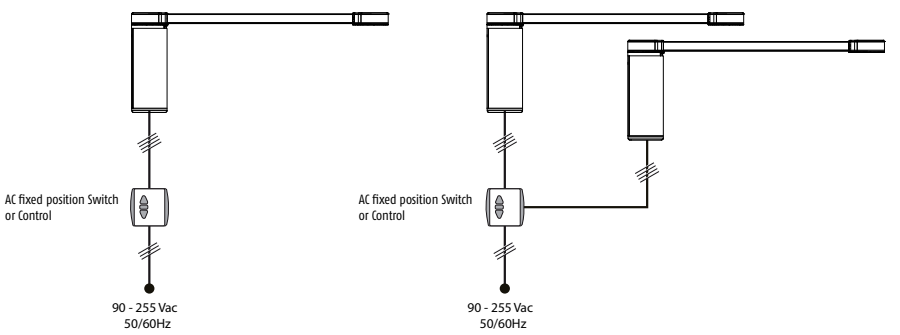

Inis uno inteo PF	
	Individual control maintained switch
Unit:	1
Ref.	1 800 016
Price:	

Série espace PF	
	Individual control maintained switch
Unit:	1
Ref.	1 800 154
Price:	

Centralis uno IB	
	Individual AC control with master control bus connection
Unit:	1
Ref.	1 800 209
Price:	

Centralis IB	
	Dry contact switch for bus master control
Unit:	1
Ref.	1 810 138
Price:	

Chronis IB	
	Timer for master bus line control
Unit:	1
Ref.	1 805 024
Price:	

Motor controller 4AC-230VAC	
	Individual and master control by animeo
Unit:	1
Ref.	1 860 049
Price:	

Motor controller 4AC RTS 433	
	Individual control by animeo and RTS transmitter
Master control by animeo	
Unit:	1
Ref.	1 860 109
Price:	

Part list

Motors & Controls

	Glydea™ 35 DCT EU 1.5 m	
	Unit: 1	Packaging: 8
	Ref. 1 001 261	
	Price:	
	Glydea™ 35 WT EU 1.5M	
	Unit: 1	Packaging: 8
	Ref. 1 001 525	
	Price:	
	Glydea™ 60e DCT EU 1.5M	
	Unit: 1	Packaging: 8
	Ref. 1 001 265	
	Price:	
	Glydea™ 60e WT EU 1.5M	
	Unit: 1	Packaging: 8
	Ref. 1 001 537	
	Price:	

RTS 433 receiver Glydea™		
	Unit: 1	Packaging: 24
	Ref. 1 870 172	
	Price:	

DCT splitter Glydea™		
	Unit: 1	Packaging: 12
	Ref. 9 015 442	
	Price:	

Track components

Pulley GA		
	Pulley assembly to put opposite the motor side with bush bearing	
	Unit: 1	Packaging: 10
	Ref. 1 780 897	
	Price:	

Drive pulley GA		
	Pulley assembly to use on the motor side with bush bearing	
	Unit: 1	Packaging: 10
	Ref. 1 780 945	
	Price:	

Motor bottom cover GA		
	Motor bottom cover spare part	
	Unit: 1	Packaging: 10
	Ref. 9 015 579	
	Price:	

Rail 16' / 5 m by 6 GA		
	16' / 5 m long Glydea track aluminium profile	
	Unit: 1 rail	Packaging: 6 / 4
	Ref. 1 780 899 / 1 781 379	
	Price:	

Rail joint GA		
	To link two rails	
	Unit: 1	Packaging: 10
	Ref. 1 780 891	
	Price:	

Heavy duty rail joint GA Coming Soon		
	To link two rails	
	Unit: 1	Packaging: 10
	Ref. 1 782 316	
	Price:	

Motor hook GA for classic curtain		
	Minimum one for 1-way and two for 2-way	
	Unit: 1	Packaging: 20
	Ref. 1 780 895	
	Price:	

Ripple motor hook GA		
	Minimum one for 1-way and two for 2-way	
	Unit: 1	Packaging: 20
	Ref. 1 780 905	
	Price:	

Pulley cover GA		
	Pulley cover spare part	
	Unit: 1	Packaging: 10
	Ref. 1 780 898	
	Price:	


Pulley stopper assembly GA		
	Spare pulley stopper assembly as a kit	
	Unit: 1	Packaging: 10
	Ref. 1 780 954	
	Price:	

Swivel ceiling bracket GA		
	Ceiling bracket to minimize the light gap (max 2 mm)	
	Unit: 1	Packaging: 100
	Ref. 1 780 906	
	Price:	

One touch ceiling bracket GA		
	For easy installation	
	Unit: 1	Packaging: 100
	Ref. 1 780 907	
	Price:	

Adjustable wall mount bracket GA		
	Bracket with minimum 100 mm projection and 34 mm extension, to use with swivel or one touch ceiling bracket	
	Unit: 1	Packaging: 1
	Ref. 1 780 909	
	Price:	

Double adjustable wall mount Bracket GA		
	Wall bracket to mount 2 rails equiped with swivel or one touch ceiling bracket. 200 mm projection, 27 mm extension and 100 mm between rails.	
	Unit: 1	Packaging: 1
	Ref. 1 780 910	
	Price:	


High perf. 10 mm belt 55 m roll		
	10 mm black pre-lubed belt	
	Unit: 55 m	Packaging: 1 roll
	Ref. 1 782 084	
	Price:	

Cushion for belt GA Coming Soon		
	Rubber part to be positionned in the assembled track to prevent the belt off splitted track transported folded.	
	Unit: 1	Packaging: 100
	Ref. 1 780 955	
	Price:	

Top mount kit GA		
	To be mounted on pulley ref. 1 780 897.	
	Unit: 1	Packaging: 10
	Ref. 1 780 908	
	Price:	

Ceiling fixing plate		
	To be mounted on the track before ceiling fixing.	
	Unit: 1	Packaging: 50 pcs per bag
	Ref. 1 781 907	
	Price:	

Accessories for “classic” curtain with flexible master carrier

Master carrier GA 35		
	Please refer to the selection chart for the maximum load of bended tracks.	
	Unit: 1	Packaging: 10
	Ref. 1 780 890	
	Price:	

Straight arm GA 35		
	Steel	
	Unit: 1	Packaging: 10
	Ref. 1 780 894	
	Price:	

Overlap arm GA 35		
	Steel	
	Unit: 1	Packaging: 10
	Ref. 1 780 893	
	Price:	

Rotating eye runner GA		
	1.5 kg maximum load	
	Unit: 1	Packaging: 500
	Ref. 1 780 892	
	Price:	

Accessories for “classic” curtain with heavy duty master carrier

Heavy duty master carrier GA		
	Applicable to all motors, configurations, up to maximum weight given in the selection chart.	
	Unit: 1	Packaging: 10
	Ref. 1 781 344	
	Price:	

Heavy duty straight arm GA		
	Stainless steel	
	Unit: 1	Packaging: 10
	Ref. 1 781 4 16	
	Price:	

Heavy duty overlap arm Kit GA		
	Stainless steel with roller	
	Unit: 1	Packaging: 10
	Ref. 1 781 4 17	
	Price:	

High perf rotating eye runner		
	1.5 kg maximum load	
	Unit: 1	Packaging: 500
	Ref. 1 781 415	
	Price:	

[illegible]

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

.....

Somfy SAS

50 avenue du Nouveau Monde
BP 152 - 74307 Cluses Cedex
France

T +33 (0)4 50 96 70 00

F +33 (0)4 50 96 71 89

www.somfy.com

A BRAND OF **SOMFY** GROUP